



DOMINATE
THE OUTDOORS
FEEL THE POWER

CORE VALUE

- Innovation
- Passion
- Reliability
- Client Loyalty

CONTENTS

GASOLINE GARDEN TOOLS

Petrol Chainsaw	08
Brush Cutter	19
Petrol Multi-tool	32
Hedge Trimmer	36
Earth Auger	38
Tiller	42
Blower	45

ELECTRIC GARDEN TOOLS

Lithium Garden Tools	50
Electric Garden Tools	55

AGRICULTURAL MACHINE

4-Stroke Gasoline Engine	57
Generator	58
Water Pump	59
High Pressure Washer	60
Wood Cutter	60
4 Tiller	61

GASOLINE GARDEN TOOLS





CHAIN SAW


Strong power

The Professional Choice Of Power And Reliability

With the continual challenge for the innovative technology, TMAXTOOL offers not more that the word lightest chainsaw, but performance oriented powerful chainsaws. Combining the efficiency, reliability and durability in our feature, you will find the best solution for the various needs.

PETROL CHAINSAWS

- TMAXTOOL robust chainsaws are designed to endure the tough conditions and severe environments. These saws deliver more power and extra durability , as well as the quick maintenance feature within the machine .
- For pursuing the safety of the professional tree-service workers who often start a chainsaw at the head of a ladder or a tree.

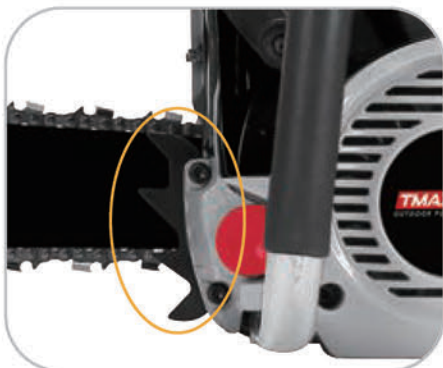


TM1800 / TM1800CV

Engine displacement : 18.3cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 0.6KW	Chain bar length : 8"(203mm)
Fuel tank capacity : 170ml	Weight : 2.2kg
Oil tank capacity : 160ml	Sprocket : 1/4"


2.5kg

TM2511 / TM2511CV

Engine displacement : 25cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 1.0KW	Chain bar length : 8"(203mm) / 10"(255mm) / 12"(300mm)
Fuel tank capacity : 190ml	Weight : 2.5kg
Oil tank capacity : 140ml	Sprocket : 3/8" / 1/4"

TM2500 / TM2500CV


Engine displacement : 25.4cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 0.75KW	Chain bar length : 10"(255mm) / 12"(300mm)
Fuel tank capacity : 230ml	Weight : 3.85kg
Oil tank capacity : 160ml	Sprocket : 3/8" / 1/4"


TM2500-2 / TM2500-2CV


Engine displacement : 25.4cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 0.75KW	Chain bar length : 10"(255mm) / 12"(300mm)
Fuel tank capacity : 230ml	Weight : 3.85kg
Oil tank capacity : 160ml	Sprocket : 3/8" / 1/4"




TM3800 / TM4100


Engine displacement : 37cc / 42.2cc	Guide bar type : Sprocket nose
Maximum enging power: 1.2KW / 1.3KW	Chain bar length : 16"(405mm) / 18"(455mm)
Fuel tank capacity : 310ml	Weight : 6.0kg
Oil tank capacity : 210ml	Sprocket : 0.325" / 3/8"


TM4500 / TM4600


Engine displacement : 45cc / 46cc	Guide bar type : Sprocket nose
Maximum enging power: 1.7KW / 1.6KW	Chain bar length : 16"(405mm) / 18"(455mm)
Fuel tank capacity : 550ml	Weight : 7.0kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"

TM5200

Engine displacement : 49.3cc	Guide bar type : Sprocket nose
Maximum enging power : 1.8KW	Chain bar length : 20"(505mm) / 22"(555mm)
Fuel tank capacity : 550ml	Weight : 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"


TM5800 / TM6150

Engine displacement : 54.5cc / 63.3cc	Guide bar type : Sprocket nose
Maximum enging power : 2.2KW / 2.4KW	Chain bar length : 20"(505mm) / 22"(555mm) / 24"(605mm)
Fuel tank capacity : 550ml	Weight : 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"




TM3800-4 / TM4100-4

Engine displacement : 37cc / 42.2cc	Guide bar type : Sprocket nose
Maximum enging power: 1.2KW / 1.3KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm)
Fuel tank capacity : 310ml	Weight : 6.0kg
Oil tank capacity : 210ml	Sprocket : 0.325" / 3/8"


TM4500-4 / TM5200-4 / TM5800-4 / TM6150-4

Engine displacement : 45cc / 49.3cc / 54.5cc / 63.3cc	Guide bar type : Sprocket nose
Maximum enging power: 1.7KW / 1.8KW / 2.2KW / 2.4KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm)
Fuel tank capacity : 550ml	Weight : 7.0kg / 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"

TM4500-5 / TM5200-5 / TM5800-5 / TM6150-5

Engine displacement : 45cc / 49.3cc / 54.5cc / 63.3cc	Guide bar type : Sprocket nose
Maximum enging power: 1.7KW / 1.8KW / 2.2KW / 2.4KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm)
Fuel tank capacity : 550ml	Weight : 6.0kgs / 7.0kgs / 7.5kgs
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"


TM4500-6 / TM5200-6 / TM5800-6

Engine displacement : 45cc / 49.3cc / 54.5cc	Guide bar type : Sprocket nose
Maximum enging power: 1.7KW / 1.8KW / 2.2KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm)
Fuel tank capacity : 550ml	Weight : 6.0kg / 7.0kg / 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"




TM6150-6
NEW


Engine displacement : 63.3cc	Guide bar type : Sprocket nose
Maximum enging power: 2.4KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm)
Fuel tank capacity : 550ml	Weight : 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"


TM5800P
NEW


Engine displacement : 54.5cc	Guide bar type : Sprocket nose
Maximum enging power: 2.8KW	Chain bar length : 18"(455mm) / 20"(505mm) / 22"(555mm)
Fuel tank capacity : 680ml	Weight : 7.0kgs / 7.5kgs
Oil tank capacity : 320ml	Sprocket : 0.325" / 3/8"



Paper air filter
1, Effectively filter impurities
2, Prolong the life of machine



Clutch cover – inverted
1, Easier assembly
2, More safer
3, Safety & precise braking



With rubber and spring shock absorber, can reduce the vibration effectively



Safety brake system
with double brake support
Quick stop



Gap between intake system and engine
1, Effectively solve the hot engine startup problem.
2, Effective heat dissipation, effectively prolonging the life of the machine.



Tool free fuel cap



CHAIN SAW PRO

Strong power

Chain Saw Pro

TMAXTOOL compact professional saws are designed for forest professionals ,
exacting demands of high performance , productivity and durability.

31.8cc

TM66180

Engine displacement : 31.8cc	Maximum cutting length : 40cm
Engine Power : 1.5KW	Chain pitch : 3/8"
Chain bar length : 14" / 16" / 18"	Chain Gauge(inch) : 0.05"

45.5cc

TM66250

Engine displacement : 45.5cc	Maximum cutting length : 45cm
Engine Power : 2.2KW	Chain pitch : 3/8" / 0.325"
Chain bar length : 14" / 16" / 18" / 20" / 25"	Chain Gauge(inch) : 0.05" / 0.063"

TM66360

Engine displacement : 61.5cc	Maximum cutting length : 55cm
Engine Power : 3.2KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 22" / 24"	Chain Gauge(inch) : 0.063"

61.5cc

TM66361

Engine displacement : 59cc	Maximum cutting length : 55cm
Engine Power : 3.1KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 22" / 24"	Chain Gauge(inch) : 0.063"

59cc


72cc

TM66038 / TM66380

Engine displacement : 72cc	Maximum cutting length : 60cm
Engine Power : 3.6KW	Chain pitch : 3/8"
Chain bar length : 16" / 20" / 24" / 25" / 28" / 30"	Chain Gauge(inch) : 0.063"

72cc

TM66381

Engine displacement : 72cc	Maximum cutting length : 60cm
Engine Power : 3.6KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 24" / 25" / 28" / 30"	Chain Gauge(inch) : 0.063"

TM66440

Engine displacement : 70.7cc	Maximum cutting length : 60cm
Engine Power : 4.0KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 22" / 24" / 25" / 28"	Chain Gauge(inch) : 0.063"

70.7cc

TM66660

Engine displacement : 91.6cc	Maximum cutting length : 60cm
Engine Power : 5.2KW	Chain pitch : 3/8"
Chain bar length : 20" / 22" / 24" / 25" / 30" / 36" / 42"	Chain Gauge(inch) : 0.063"

91.6cc


105.7_{cc}

TM66070

Engine displacement : 105.7cc	Maximum cutting length : 85cm
Engine Power : 4.8KW	Chain pitch : 0.404"
Chain bar length : 20" / 22" / 30" / 36" / 42"	Chain Gauge(inch) : 0.063"

55.6_{cc}

TM7760

Engine displacement : 55.6cc	Maximum cutting length : 50cm
Engine Power : 2.5KW	Chain pitch : 0.325"
Chain bar length : 20" / 22"	Chain Gauge(inch) : 0.058"

TM8840

Engine displacement : 40.2cc	Maximum cutting length : 40cm
Engine Power : 1.6KW	Chain pitch : 0.325"
Chain bar length : 18"	Chain Gauge(inch) : 0.058"

40.2_{cc}

TM88365

Engine displacement : 65.1cc	Maximum cutting length : 55cm
Engine Power : 3.4KW	Chain pitch : 3/8"
Chain bar length : 16" / 18" / 20" / 22" / 24" / 25"	Chain Gauge(inch) : 0.058"

65.1_{cc}


70.7cc

TM88372P

Engine displacement : 70.7cc	Maximum cutting length : 55cm
Engine Power : 3.9KW	Chain pitch : 3/8"
Chain bar length : 16" / 18" / 20" / 22" / 24" / 28"	Chain Gauge(inch) : 0.058"

70.7cc

TM88372T

Engine displacement : 70.7cc	Maximum cutting length : 55cm
Engine Power : 3.9KW	Chain pitch : 3/8"
Chain bar length : 16" / 18" / 20" / 22" / 24" / 28"	Chain Gauge(inch) : 0.058"

TM88268 / TM88272 / TM88061 / TM88872

Engine displacement : 72cc	Maximum cutting length : 60cm
Engine Power : 3.6KW	Chain pitch : 3/8"
Chain bar length : 20" / 22" / 24" / 28" / 30"	Chain Gauge(inch) : 0.063"

72cc

TM88288 / TM88870

Engine displacement : 87cc	Maximum cutting length : 60cm
Engine Power : 4.2KW	Chain pitch : 3/8"
Chain bar length : 20" / 22" / 24" / 25" / 28" / 30" / 36"	Chain Gauge(inch) : 0.063"

87cc




BRUSH CUTTER

High performance


Ideal For Mowing Large Areas Of Long Grass.

TMAXTOOL Grass trimmers, brushcutters & clearing saws quickly tame long grass and under growth . The machines are fitted with cutting tools to cater for jobs from mowing small areas of grass and edges to thinning out overgrown thickets. Tmaxtool's engines produce significantly less emissions than conventional two-stroke engines, giving you increased fuel efficiency with less impact on the environment.



PETROL BRUSH CUTTER

- TMAXTOOL trimmers and brushcutters are designed to provide you with a reliable engine that has low vibration and low noise.
- For working in challenging areas of tough grass 6-point anti-vibration system.
- TEAMMAX 2 stroke engine, increased fuel efficiency with less impact on the environment.

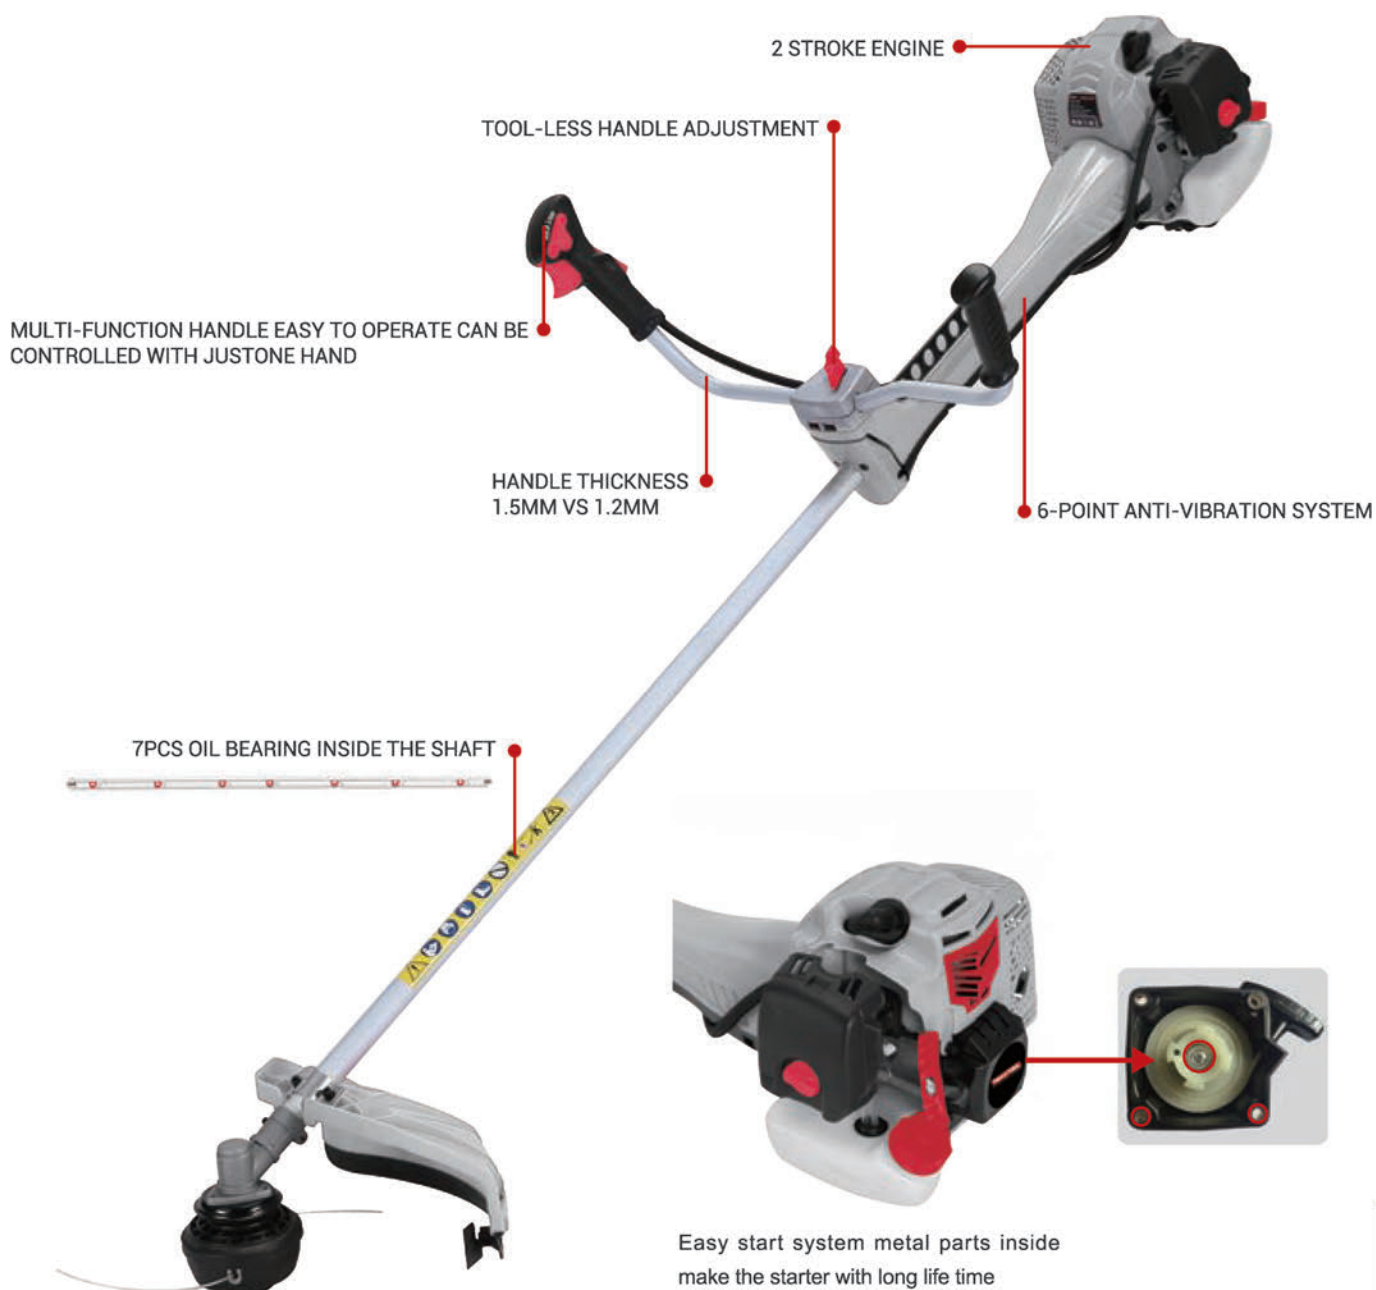

of Start Green2
CE EMC EURO-V



of Start Green2
CE EMC EURO-V



NEW

of Start Green2
CE EMC EURO-V



of Start Green2
CE EMC EURO-V



TMBC415P / TMBC520P / TMBC620P / TMBC650P / TMBC720P

Engine : TM1E40F-5 / 1E44F / 1E47.5F / 1E48F / 1E50F	Shaft diameter : 26mm / 28mm
Displacement: 42.7cc / 51.7cc / 62cc / 65cc / 72.6cc	Belt : Single belt / Super belt
Power : 1.25KW / 1.6KW / 2.1KW / 2.3KW / 2.5KW	Handle : P handle / Bicycle handle Anti-vibration Handle / Stihl handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade




TMBC260SA

Engine : TMBC1E34F	Shaft diameter : 26mm
Displacement: 25.4cc	Belt : Single belt
Power : 0.7KW	Handle : Loop handle
Cutting diameter : 380mm	Blade : Nylon cutter

TMBC260A

Engine : TMBC1E34F	Shaft diameter : 26mm
Displacement: 25.4cc	Belt : Single belt
Power : 0.7KW	Handle : Double bicycle handle / Loop handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade


TMBC305B

Engine : TM1E36F	Shaft diameter : 26mm
Displacement: 32.6cc	Belt : Single belt
Power : 1.0KW	Handle : Double bicycle handle / Loop handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade

TMBC305-6

Engine : TM1E36F-6	Shaft diameter : 26mm
Displacement: 32.6cc	Belt : Single belt
Power : 1.0KW	Handle : Double bicycle handle / Loop handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade




**TMBC415 / TMBC520
TMBC620**

**TMBC415-4 / TMBC520-4
TMBC620-4 / TMBC650-4**

**TMBC415-6B / TMBC520-6B
TMBC620-6B / TMBC650-6B**

**TMBC415-7B / TMBC520-7B
TMBC620-7B / TMBC650-7B**

Engine : TM1E40F-5 / 1E44F / 1E47.5F / 1E48F	Shaft diameter : 26mm / 28mm
Displacement: 42.7cc / 51.7cc / 62cc / 65cc	Belt : Single belt / Super belt
Power : 1.25KW / 1.6KW / 2.1KW / 2.3KW	Handle : Double bicycle handle / Loop handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade

- For comfortable operation.
- where space is limited.
- For mowing large areas of grass.
- High-performance with.
- Various cutting tools.



TMBC415-5 / TMBC520-5 / TMBC620-5 / TMBC650-5

Engine : TM1E40F-5 / 1E44F / 1E47.5F / 1E48F	Shaft diameter : 26mm / 28mm
Displacement: 42.7cc / 51.7cc / 62cc / 65cc	Belt : Single belt / Super belt
Power : 1.25KW / 1.6KW / 2.1KW / 2.3KW	Handle : Loop handle / Double bicycle handle Simple shock absorption / Luxury shock absorption
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade



of Start Green2
CE EMC EURO-V



TMBC415-6 / TMBC520-6
TMBC620-6 / TMBC650-6

of Start Green2
CE EMC EURO-V



TMBC720-6 / TMBC720B

of Start Green2
CE EMC EURO-V



TMBC415-7 / TMBC520-7
TMBC620-7 / TMBC650-7

of Start Green2
CE EMC EURO-V



TMBC720-7

Engine : TM1E40F-5 / 1E44F / 1E47.5F / 1E48F / 1E50F	Shaft diameter : 28mm
Displacement : 42.7cc / 51.7cc / 62cc / 65cc / 72.6cc	Belt : Single belt / Super belt
Power : 1.25KW / 1.6KW / 2.1KW / 2.3KW / 2.5KW	Handle : Double bicycle handle / Loop handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & Metal blade

- For working in challenging areas of tough grass 6-point anti-vibration system.
- Easy to start.
- Multi-function bike handle with double harness

- Ideal for cutting on steep embankments , ingrown slopes , narrow ditches , vineyards or orchards .
- The weight carried on the user's back for maximum comfort via a support frame.

1. For effective , flexible mowing on embankments and slopes .
2. Perfect for vineyards , orchards and hillsides .
3. Comfortable carrying system
4. Flexible shaft



BACKPACK BRUSH CUTTER

TMBG520 / TMBG620 / TMBG650

Engine : 1E44F / 1E47.5F / 1E48F	Shaft diameter : 26mm
Displacement: 51.7cc / 62cc / 65cc	Belt : Super belt
Power : 1.6KW / 2.1KW / 2.3KW	Handle : Loop handle
Cutting diameter : 255mm / 430mm	Blade : Nylon cutter & metal blade

BACKPACK RICE HARVESTER

TMHV520 / TMHV620 / TMHV650

Engine : 1E44F / 1E47.5F / 1E48F	Shaft diameter : 26mm
Displacement: 51.7cc / 62cc / 65cc	Belt : Super belt
Power : 1.6KW / 2.1KW / 2.3KW	Handle : Loop handle
Cutting diameter : 255mm	Blade : Nylon cutter & metal blade



- Ideal for home gardens.
- Perfect for mowing small areas of grass and trimming lawn edges.
- Easy to start.

HANDPUSH BRUSH CUTTER

TMBC520D / TMBC620D / TMBC650D

Engine : 1E44F / 1E47.5F / 1E48F	Shaft diameter : 26mm / 28mm
Displacement: 51.7cc / 62cc / 65cc	Cutting diameter : 255mm / 430mm
Power : 1.6KW / 2.1KW / 2.3KW	Blade : Nylon cutter & Metal blade





TM450A / TM530A



TM450B / TM530B



TM450R / TM530R



TM450V / TM530V



Anti-vibration
handle bracket

TM450SV / TM530SV



TMBG450E / TMBG530E

Displacement: 45.4cc / 53.2cc	Handle : P handle / Bicycle handle / Stihl handle / Anti-vibration Handle / Rotatable handle
Power : 1.42KW / 2.0KW	
Fuel mixture ratio 50:1	
Shaft diameter: 26mm / 28mm	Blade : Nylon cutter & metal blade



TMGX35A



TMGX35B



TMGX35R



TMGX35V



TMGX35SV

Displacement:
37.7cc

Power :
0.9KW

Shaft diameter:
26mm / 28mm

Blade :
Nylon cutter & metal blade

Handle :

P handle /

Bicycle handle /

Stihl handle /

Anti-vibration Handle /

Rotatable handle



TMBGX35



TMGX50A



TMGX50B



TMGX50R



TMGX50V



TMGX50SV



TMBGX50

Displacement: 47.9cc	Handle : P handle / Bicycle handle / Stihl handle / Anti-vibration Handle / Rotatable handle
Power : 1.25KW	
Shaft diameter: 26mm / 28mm	
Blade : Nylon cutter & metal blade	

- Robust, dependable, powerful.
- Ideal for mowing large areas of long grass.
- Also perfect for clearing weeds, tree cultivation, overgrown thickets and bushes.



TM450 / TM530



TMGX35



TMGX50



TMBC443



TMBC541



**TMBC120 / TMBC200
TMBC250**

Model	TM450	TM530	TMGX35	TMGX50	TMBC443	TMBC541	TMBC120	TMBC200	TMBC250
Displacement	45.4cc	53.2cc	37.7cc	47.9cc	41.5cc	41.5cc	30.8cc	36.3cc	40.2cc
Power	1.42KW	2.0KW	0.9KW	1.25KW	1.47KW	1.47KW	1.3KW	1.6KW	1.6KW
Fuel mixture ratio	50:1	50:1	/	/	30:1	30:1	40:1	40:1	40:1
Shaft diameter	26 /28mm	26 /28mm	26 /28mm	26 /28mm	26mm	26mm	26mm	26mm	26mm
Handle	Double bicycle handle / Loop handle								
Blade	Nylon cutter & Metal blade								

Trimmer head



Guards



Blade



Safety Kits



Handle for brush cutter



Belt





PETROL MULTI-TOOL

Multi-tool

The professional choice of power and reliability.

Ideal for cutting on steep embankments , ingrown slopes , narrow ditches , vineyards or orchards.
The weight carried on the user's back for maximum comfort via a support frame.
Lightweight multi tool trimmers for landscape professionals.

- Lightweight multi tool trimmers for landscape professionals.
- You can select the engine units and attachments according to the purpose of use.



PETROL MULTI-TOOL

TMM415 / TMM520 / TMM620

Output power : 1.25KW / 1.6KW / 2.1KW	Pole pruner bar length : 10" (255mm) / 12" (300mm)
Displacement: 42.7cc / 51.7cc / 62cc	Oil tank capacity : 150ml
Shaft Dia : 26mm / 28mm	Three teeth blade dia : 255mm
Fuel tank capacity : 1100ml	Hedge trimmer cutting length : 430mm



of Start Green2
CE EMC EURO-V



**TMM415-4 / TMM520-4
TMM620-4 / TMM650-4**

of Start Green2
CE EMC EURO-V



**TMM415-5 / TMM520-5
TMM620-5 / TMM650-5**

of Start Green2
CE EMC EURO-V



**TMM415-6 / TMM520-6
TMM620-6 / TMM650-6**

of Start Green2
CE EMC EURO-V



**TMM415-7 / TMM520-7
TMM620-7 / TMM650-7**

Output power : 1.25KW / 1.6KW / 2.1KW / 2.3KW	Pole pruner bar length : 10" (255mm) / 12" (300mm)
Displacement: 42.7cc / 51.7cc / 62cc / 65cc	Oil tank capacity : 150ml
Shaft Dia : 26mm / 28mm	Three teeth blade dia : 255mm
Fuel tank capacity : 1100ml	Hedge trimmer cutting length : 430mm

- For effective , flexible mowing on embankments and slopes.
- Perfect for vineyards , orchards and hillsides.
- Comfortable carrying system.



PETROL MULTI-TOOL

TMM260A

Output power : 0.7KW	Pole pruner bar length : 10" (255mm) / 12" (300mm)
Displacement: 25.4cc	Oil tank capacity : 150ml
Shaft Dia : 26mm	Three teeth blade dia : 255mm
Fuel tank capacity : 690mm	Hedge trimmer cutting length : 430mm

PETROL MULTI-TOOL

TMM305 / TMM305-6

Output power : 1.0KW	Pole pruner bar length : 10" (255mm) / 12" (300mm)
Displacement: 32.6cc	Oil tank capacity : 150ml
Shaft Dia : 26mm	Three teeth blade dia : 255mm
Fuel tank capacity : 850ml	Hedge trimmer cutting length : 430mm



COFFEE BEAN HARVESTER

TMCH260

Engine TMBC1E34F	Weight 8.5kgs / 8kgs
Displacement: 25.4cc	Type of head: 24 sticks / 12 sticks
Maximum enging power 0.75KW	Swing reduction ratio 40:14

COFFEE BEAN HARVESTER

TMCH305

Engine TM1E36F	Weight 8.5kgs / 8kgs
Displacement: 32.6cc	Type of head: 24 sticks / 12 sticks
Maximum enging power 1.0KW	Swing reduction ratio 40:14





HEDGE TRIMMER

Excellent Anti-vibration System


The professional choice of power and reliability.

Exclusively designed for powerful efficient cutting to hedges and shrubs low weight and excellent cutting performance are both key for shaping delicate ornamental and woody hedges.



180° degree adjustable handle

Locking blade screw

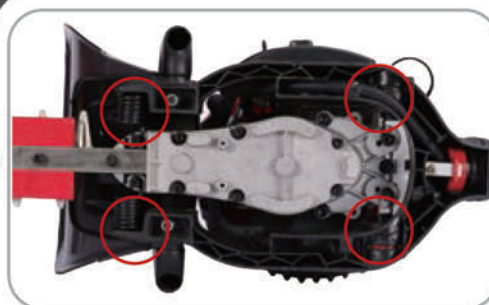

Excellent anti-vibration system

HEDGE TRIMMER

TMHT230B-2 / TMHT260B-2

Engine : TMHT1E32F / TMHT1E34F	Start system : Recoil
Displacement: 22.5cc / 25.4cc	Blade : Double side blade
Power : 0.65KW / 0.68KW	Blade length : 600mm / 700mm
Fuel tank capacity : 580ml / 530ml	Cutting length: 550mm / 620mm
Ignition: CDI	Fuel/Oil mixture ratio : 25:1



HEDGE TRIMMER

TMHT230B / TMHT260B



Engine : TMHT1E32F / TMHT1E34F	Start system : Recoil
Displacement: 22.5cc / 25.4cc	Blade : Double side blade
Power : 0.65KW / 0.68KW	Blade length : 600mm / 700mm
Fuel tank capacity : 580ml / 530ml	Cutting length: 550mm / 620mm
Ignition: CDI	Fuel/Oil mixture ratio : 25:1



EARTH AUGER

2-stroke,air-cooled,1 -cylinder

Ideal for large areas that are usually hard to access.

One-man auger with Quick stop drill brake . Suitable for a large variety of tasks form drilling simple holes in the ground totaking soil samples from the borehole.Framework padding isincluded

2-STROKE



Drill bit type



Normal blade



Replaceable blade



Damping spring



Single leaf / Steel drill head /
Replaceable blade



Double leaf / Steel drill head /
Normal blade

Drill Bit size



Diameter: 80mm / 100mm / 150mm / 200mm / 250mm / 300mm
Length: 80cm-100cm

Extension Rods



30mm / 60mm / 80mm / 100mm

**TMD520-1 / TMD620-1 / TMD650-1**

Engine model : 1E44F / 1E47.5F / 1E48F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 51.7cc / 62cc / 65cc	Max engine speed : 9000±500rpm
Power : 1.6KW / 2.1KW / 2.3KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L

TMD520-3 / TMD620-3 / TMD650-3

Engine model : 1E44F / 1E47.5F / 1E48F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 51.7cc / 62cc / 65cc	Max engine speed : 9000±500rpm
Power : 1.6KW / 2.1KW / 2.3KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L

**TMD720-1****TMD720-2**

Engine model : 1E50F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 72.6cc	Max engine speed : 9000±500rpm
Power : 2.5KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L

**TMD720-3**

**TMD520-6A / TMD620-6A / TMD650-6A**

Engine model : 1E44F / 1E47.5F / 1E48F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 51.7cc / 62cc / 65cc	Max engine speed : 10000rpm
Power : 1.6KW / 2.1KW / 2.3KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L

TMD520-6C / TMD620-6C / TMD650-6C

Engine model : 1E44F / 1E47.5F / 1E48F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 51.7cc / 62cc / 65cc	Max engine speed : 10000rpm
Power : 1.6KW / 2.1KW / 2.3KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L

**TMD520-7A / TMD620-7A / TMD650-7A**

Engine model : 1E44F / 1E47.5F / 1E48F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 51.7cc / 62cc / 65cc	Max engine speed : 10000rpm
Power : 1.6KW / 2.1KW / 2.3KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L

TMD520-7C / TMD620-7C / TMD650-7C

Engine model : 1E44F / 1E47.5F / 1E48F	Engine : 2-stroke, air-cooled, 1-cylinder
Displacement: 51.7cc / 62cc / 65cc	Max engine speed : 10000rpm
Power : 1.6KW / 2.1KW / 2.3KW	Fuel/Oil mixture ratio : 25:1
Ldng speed : 3000±200rpm	Fuel tank capacity : 1.2L





TILLER

4-Blades, 6-Blades

Seeder machine, fast feed ,fast working arable landand sowing at same time.

One-man tiller with Quick stopdrill brake . Suitable for a largevariety of tasks form drillingsimple holes in the ground totaking soil samples from theborehole.Framework padding isincluded

**TMC520 / TMC620 / TMC650**

Engine : 1.6KW / 2.1KW / 2.3KW	Working depth : 15-20cm
Displacement: 51.7cc / 62cc / 65cc	Working width: 30cm
Lgnition system : C.D.I	N.W / G.W : 11kgs / 13kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1

TMC520-2 / TMC620-2 / TMC650-2

Engine : 1.6KW / 2.1KW / 2.3KW	Working depth : 15-20cm
Displacement: 51.7cc / 62cc / 65cc	Working width: 40cm
Lgnition system : C.D.I	N.W / G.W : 12kgs / 14kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1

**TMC720 / TMC720-2**

Engine : 2.5KW	Working depth : 15-20cm
Displacement: 72.6cc	Working width: 30cm / 40cm
Lgnition system : C.D.I	N.W / G.W : 13kgs / 15kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1

**TMC620-3 / TMC650-3 / TMC720-3**

Engine : 2.1KW / 2.3KW / 2.5KW	Fuel tank capacity : 1.2L
Displacement: 62cc / 65cc / 72.6cc	Working depth : 10-40cm
Lgnition system : C.D.I	Working width: 20-50cm





NEW

TMC520-6A / TMC620-6A / TMC650-6A

Engine : 1.6KW / 2.1KW / 2.3KW	Working depth : 15-20cm
Displacement: 51.7cc / 62cc / 65cc	Working width: 30cm
Lgnition system : C.D.I	N.W / G.W : 11kgs / 12kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1

TMC520-6B / TMC620-6B / TMC650-6B

Engine : 1.6KW / 2.1KW / 2.3KW	Working depth : 15-20cm
Displacement: 51.7cc / 62cc / 65cc	Working width: 40cm
Lgnition system : C.D.I	N.W / G.W : 13kgs / 14kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1



NEW



NEW

TMC520-7A / TMC620-7A / TMC650-7A

Engine : 1.6KW / 2.1KW / 2.3KW	Working depth : 15-20cm
Displacement: 51.7cc / 62cc / 65cc	Working width: 30cm
Lgnition system : C.D.I	N.W / G.W : 11kgs / 12kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1

TMC520-7B / TMC620-7B / TMC650-7B

Engine : 1.6KW / 2.1KW / 2.3KW	Working depth : 15-20cm
Displacement: 51.7cc / 62cc / 65cc	Working width: 40cm
Lgnition system : C.D.I	N.W / G.W : 13kgs / 14kgs
Fuel tank capacity : 1.2L	Gear rate : 34:1



NEW



BLOWER

lightweight & high blowing

TMAXTOOL offers powerfull, lightweight & high blowing capacity blower.

TMAXTOOL offers both backpack blowers with a professional capacity and lightweight handheld blowers for home use.

They are easy to operate with high blowing capacity and bring the powerful & satisfying result.




TMBV260A

Engine model : TMBC1E34F	Air velocity : ≥41m/s
Displacement: 25.4cc	Air volume : ≥0.2m³/s
Max engine power : 0.75KW / 7500rpm	Fuel mix ratio: 25:1

TMEBV260


Engine model : TMBC1E34F	Outlet speed : 68m/s
Displacement: 25.4cc	Flow: 0.17cbm/s
Max engine power : 0.75KW / 7500rpm	Fuel mix ratio : 25:1


TMB260A

Engine model : TMBC1E34F	Air velocity : ≥41m/s
Displacement: 25.4cc	Air volume : ≥0.2m³/s
Max engine power : 0.75KW / 7500rpm	Fuel mix ratio: 25:1

TMEB260


Engine model : TMBC1E34F	Outlet speed : 68m/s
Displacement: 25.4cc	Flow: 0.17cbm/s
Max engine power : 0.75KW / 7500rpm	Fuel mix ratio : 25:1


TMEB430

Engine model : 1E40F-5A	Outlet speed : 60m/s
Displacement: 42.7cc	Flow: 0.2cbm/s
Max engine power : 1.25KW / 6500rpm	Fuel mix ratio : 25:1


TMEB430B / TMEB520B

Engine model : 1E40F-5B / 1E44F-5C	Outlet speed : 70m/s
Displacement: 42.7cc / 51.7cc	Flow: 0.2cbm/s
Max engine power : 1.25KW / 7000rpm / 1.4KW / 6500rpm	Fuel mix ratio: 25:1


TMEB430C / TMEB520C

Engine model : 1E40F-5B / 1E44F-5C	Outlet speed : 70m/s
Displacement: 42.7cc / 51.7cc	Flow: 0.2cbm/s
Max engine power : 1.25KW / 7000rpm / 1.4KW / 6500rpm	Fuel mix ratio: 25:1


TMEB630A

Engine model : 1E48F	Outlet speed : 70m/s
Displacement: 63cc	Flow: 0.26cbm/s
Max engine power : 2.2KW / 6500rpm	Fuel mix ratio : 25:1




TMEB760A

Engine model : 1E51F	Outlet speed : 92.2m/s
Displacement: 75.6cc	Flow: 1740m³/h
Max engine power : 3.1KW / 7000r/min	Fuel mix ratio: 25:1

TMEB760B

Engine model : 1E51F	Outlet speed : 92m/s
Displacement: 75.6cc	Flow: 1500m³/h
Max engine power : 3.1KW / 7000rpm	Fuel mix ratio: 25:1


TMEB760C

Engine model : 151F	Outlet speed : 80m/s
Displacement: 75.6cc	Flow: 0.28cbm/s
Max engine power : 2.2KW / 7000r/min	

TMEB437

Engine model : 140FA	Outlet speed : 58m/s
Displacement: 38cc	Flow: 0.2cbm/s
Max engine power : 1.0KW / 6500r/min	





SPRAYER

TM3WF-3A

Displacement : 41.5cc	Tank Capacity : 14L / 20L / 26L
Standard Power: 2.13KW / 7500r/min	Fuel tank: 1400ml
Fuel Consumption : 530g/kw·h	Mixed Fuel Ratio: 25:1

SPRAYER

TM3WZ-6

Displacement : 25.4cc	Tank Capacity : 25L
Standard Power: 1.75KW / 7500r/min	Fuel tank: 700ml
Working pressure : 1.0-2.5Mpa	Mixed Fuel Ratio: 25:1



WATER PUMP

TMQGZ25-6-20C

Displacement : 42.7cc	Flow : 6m³/h
Suction Length: 6m	Water Outlet Diameter: 25mm
Lift : 20m	Stipulation Suction Time: 80s

WATER PUMP

TMQGZ25-6-20

Displacement : 40.2cc	Flow : 8m³/h
Suction Length: 7m	Water Outlet Diameter: 25mm
Lift : 30m	Stipulation Suction Time: <80s



PROFESSIONAL ELECTRIC GARDEN TOOLS



MINI SAW



SPECIFICATIONS	UW-CS1001	UW-CS1002	UW-CS1501	UW-CS1502
Motor	Brush motor	Brush motor	Brush motor	Brushless motor
Voltage	20V	20V	20V	20V
Bar size	4"(100mm)	4"(100mm)	4"(100mm) / 6"(150mm)	4"(100mm) / 6"(150mm)
Saw chain speed	4m/s	5m/s	12m/s	7m/s
Battery capacity	1.5-4.0Ah	1.5-4.0Ah	1.5-4.0Ah	1.5-4.0Ah
Chain pitch	1/4"	1/4"	1/4"	1/4"

MINI SAW



SPECIFICATIONS	UW-CS2001	UW-CS2002	UW-CS3001	
Motor	Brushless motor	Brushless motor	Brushless motor	
Voltage	20V	20V	20V	
Bar size	4"(100mm) / 6"(150mm) / 8"(203mm)	4"(100mm) / 6"(150mm) / 8"(203mm)	10"(255mm) / 12"(300mm)	
Saw chain speed	6m/s	7m/s	20m/min	
Battery capacity	1.5-4.0Ah	1.5-4.0Ah	1.5-4.0Ah	
Chain pitch	1/4"	1/4"	1/4"	

PRUNING SHEAR



SPECIFICATIONS	UW-PS4001 (Extension rod)	UW-PS4002	UW-PS3201	UW-PS3202
Motor	Brushless motor	Brushless motor	Brushless motor	Brushless motor
Voltage	25V	20V	20V	20V
Cutting width	40mm	40mm	32mm	32mm
Blade material	SK5	SK5	SK5	SK5
Battery capacity	2.0-4.0Ah	2.0-4.0Ah	2.0-4.0Ah	2.0-4.0Ah

PRUNING SHEAR



SPECIFICATIONS	UW-PS3001	UW-PS2801	UW-PS2802	UW-PS2501
Motor	Brushless motor	Brushless motor	Brushless motor	Brushless motor
Voltage	20V	16.8V	16.8V	20V
Cutting width	30mm	28mm	28mm	25mm
Blade material	SK5	SK5	SK5	SK5
Battery capacity	2.0-4.0Ah	2.0-4.0Ah	2.0-4.0Ah	2.0-4.0Ah

LITHIUM BLOWER



SPECIFICATIONS	UW8A515	UW8A516	UW8A511-A
Motor	Brush motor	Brushless Motor	Brushless Motor
Voltage	20V	20V+20V	20V+20V
Max Air Speed	100-126km/h	200km/h	200km/h
No-load Speed	13000-16000rpm	9000-19000rpm	23000rpm
Battery capacity	2.0-4.0Ah	2.0-4.0Ah	2.0-4.0Ah
Max Wind Capacity	335CFM	515CFM	480CFM

LITHIUM BLOWER



SPECIFICATIONS	UW8A512	UW8A523
Motor	Brushless Motor	Brush motor
Voltage	20V+20V	20V
Max Air Speed	270km/h	50m/s / 67m/s
No-load Speed	16300rpm	11500rpm / 13300rpm
Battery capacity	2.0-4.0Ah	2.0-4.0Ah
Max Wind Capacity	335CFM	195m³/h / 243m³/h



SPECIFICATIONS

UW-BCD1358

Motor	Brush motor
Voltage	20V
Blade Diameter	150mm
No load speed	9500rpm
Battery capacity	1.5-4.0Ah
Machine length	94-130cm

UW-BCD1358

Motor	Brush motor
Voltage	20V
Blade Diameter	150mm
No load speed	9500rpm
Battery capacity	1.5-4.0Ah
Machine length	94-130cm



SPECIFICATIONS

UW-BCD2368

Motor	Brush motor+Gear system
Voltage	20V
Blade Diameter	200mm
No load speed	5000rpm
Battery capacity	2.0-4.0Ah
Machine length	94-130cm

UW-BCD2468

Motor	Brushless motor+Gear system
Voltage	20V
Blade Diameter	200mm
No load speed	5000rpm
Battery capacity	2.0-4.0Ah
Machine length	94-130cm

UW-BCU2368

Motor	Brush motor+Gear system
Voltage	20V
Blade Diameter	200mm
No load speed	5000rpm
Battery capacity	2.0-4.0Ah
Machine length	94-130cm

UW-BCU2468

Motor	Brushless motor+Gear system
Voltage	20V
Blade Diameter	200mm
No load speed	5000rpm
Battery capacity	2.0-4.0Ah
Machine length	94-130cm

LITHIUM MULTI FUNCTION MACHINE



SPECIFICATIONS	UW8A207	UW8A213
Motor	Brush motor	Brush motor
Voltage	20V	20V
Bar sizer	8"(203mm)	8"(203mm)
Brushless Motor	3-teeth	3-teeth
Nylon line	Double thread, Bump Feed	Double thread, Bump Feed
Battery capacity	1.5-4.0Ah	1.5-4.0Ah
Max cutting length	420mm laser blade	420mm laser blade

LITHIUM CHAIN SAW



LITHIUM HEDGE TRIMMER



SPECIFICATIONS	UW8J126	UW8A612
Motor	Brush motor	Brush motor
Voltage	20V	20V
Bar size	10"(255mm)	16"(400mm)
No-load speed	5.6m/s	3000r/min
Battery capacity	1.5-4.0Ah	1.5-4.0Ah
Max cutting length	200mm	16mm

ELECTRIC CHAIN SAW



SPECIFICATIONS	UW7J101	UW7J108	UW7C105BS-1
Voltage&Frequency	230-240V ~ 50Hz	230-240V ~ 50Hz	230-240V ~ 50Hz
No Load Speed	7400rpm	7400rpm	7400rpm
Chain Speed	15m/s	15m/s	13m/s
Rate Powe	2200W	2200W	2200W
Bar length	16"(405mm)	16"(405mm)	16"(405mm)
Gear	Metal	Metal	Metal

ELECTRIC HEDGE TRIMMERT




SPECIFICATIONS	UWHT16	UWHT08	UWHT12
Voltage&Frequency	230-240V ~ 50Hz	230-240V ~ 50Hz	230-240V ~ 50Hz
Power	500W	500W	500W
No load speed	1600rpm	1400rpm	1500rpm
Cutting length	450mm	610mm	550mm
Cutting width	16mm	20mm	20mm

ELECTRIC BLOWER



SPECIFICATIONS	UWBV09-3500	UWBV12-3500	UWBV19
Voltage&Frequency	230-240V ~ 50Hz	230-240V ~ 50Hz	230-240V ~ 50Hz
Power	3500W / 900W	3500W / 900W	2800W
Air speed	270km/h	270km/h	250km/h
Suction volume	14m³/min	14m³/min	12m³/min
No load speed	6000-14000rpm	6000-14000rpm	
Collection bag	30L	30L	40L

ELECTRIC FLOOR SCRUBBER

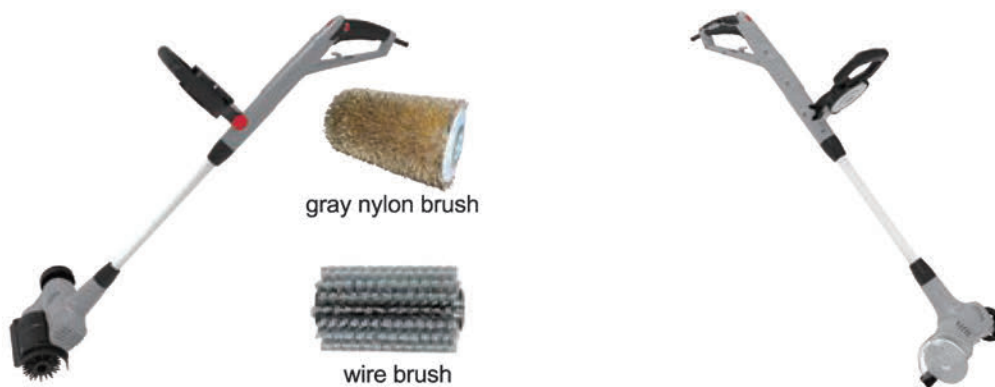

SPECIFICATIONS	UWMB03	UWWS01
Voltage&Frequency	230-240V ~ 50Hz	230-240V ~ 50Hz
Power	550W	550W
No load speed	6000-1200min ⁻¹	1800r/min
1x Big black brush	Ø190mm	
1x Narrow nylon brush	Ø100mm	Ø100mm
1x Narrow metal brush	Ø100mm	Ø100mm

TMAXTECH



GASOLINE ENGINE

4-STROKE PRODUCTS

The products include: inverter generator / water pump / high pressure washer / wood chipper / 4-stroke tiller.



Model	168F-1	170F	177F	188F	190F	192F	192FC
Type	Air-cooled, single cylinder, 4 stroke OHV gasoline engine						
Horse Power(HP)	6.5	7.0	9	13	15	16	18
Displacement (cc)	196	210	270	389	407	420	467
Bore×stroke (mm)	68x54	70x54	77x58	88x64	90x66	92x66	92x70
Oil Capacity(L)	0.6	0.6	1.1	1.1	1.1	1.1	1.1
Fuel tank capacity (L)	3.6	3.6	6	6.5	6.5	6.5	6.5
Starting system	Recoil and hand -operated(electric optional)						
Net weight (Kg)	15	15	26	34	34	34	35

● Perfect engine for generator, pressure washer and water pump.



green2 CE
EMC EURO-V

NEW



INVERTER GENERATOR

TMBS2000I-TMBS2500I

Engine Displacement : 80cc / 98cc	Max. Power: 1.8KW / 2.2KW
Rated Frequency : 60Hz	Fuel Tank Capacity: 5.5L
Rated Voltage : 110V	Weight : 24kg

INVERTER GENERATOR

TMBS2350IS-TMBS2850IS

green2 CE
EMC EURO-V

NEW



Engine Type: Air-cooled, Single cylinder, 4-Stroke	DC Output : 12V-8.3A
Rated Frequency : 50Hz	Fuel Tank Capacity : 5.5L
Rated Voltage : 220V	Continuous Running Time : 5h
Max. Power : 2.0KW / 2.5KW	Weight : 18.5kgs / 20kgs

GENERATOR

TMBS2500 / TMBS3500

green2 CE
EMC EURO-V



Engine Type: 4 Stroke, Air-cooled	Max. Power : 2.2KW / 3.0KW
Engine Displacement: 212cc	Fuel Tank Capacity : 15L
Rated Frequency : 50Hz	Continuous Running Time : 9h
Rated Voltage : 220V	Weight : 41kgs / 46kgs

GENERATOR

TMBS6500 / TMBS10000E

green2 CE
EMC EURO-V



Engine Type: 4 Stroke, Air-cooled	Max. Power : 5.5KW / 8.0KW
Engine Displacement: 420cc / 460cc	Fuel Tank Capacity : 25L
Rated Frequency : 50Hz	Continuous Running Time : 9h / 8h
Rated Voltage : 220V	Weight : 82kgs / 91kgs

green2 CE
EMC EURO-V



TMWP15X

Displacement : 97cc	Discharge Port Diameter : 40mm
Pump Set : Self-priming pump	Total Head Lift: 15m
Suction Port Diameter : 40mm	Discharge Capacity: 10(m³/h)

TMWP30X

Displacement : 212cc	Discharge Port Diameter : 80mm
Pump Set : Self-priming pump	Total Head Lift: 30m
Suction Port Diameter : 80mm	Discharge Capacity: 35(m³/h)

green2 CE
EMC EURO-V



green2 CE
EMC EURO-V



TMWP20I

Displacement : 212cc	Discharge Port Diameter : 50mm
Pump Set : Cast Iron pump	Total Head Lift : 50m
Suction Port Diameter : 60mm	Discharge Capacity: 40(m³/h)

TMWP30S

Displacement : 212cc	Discharge Port Diameter : 80mm
Pump Set : Self-priming pump	Total Head Lift: 19m
Suction Port Diameter : 80mm	Discharge Capacity: 36(m³/h)

green2 CE
EMC EURO-V



Green2 CE EMC

NEW



HIGH PRESSURE WASHER

TM-170NB

Voltage/Frequency : 230-240V / 50HZ	Rate Powe : 2200W
No Load Speed : 7400rpm	Bar Length /Cutting Length: 16"
Chain Speed : 15m/s	Gear: Metal

HIGH PRESSURE WASHER

TM-170A

Voltage/Frequency : 230-240V / 50HZ	Chain speed : 13m/s
Rate Power: 2200W	Cutting length: 406mm
No load speed : 7000rpm	Tool system: Tool free chain adjustment

Green2 CE EMC



WOOD CHIPPER

TM-701

Engine Type : OHV 4-stroke	Max Chipping DIA : 120mm
Displacement : 420cc	Blade Speed : 2600rpm
Max. Output : 15.0HP / 3600rpm	Engine Speed : 3600rpm

Green2 CE



WOOD CHIPPER

TM-704A

Engine Type : OHV 4-stroke	Max Chipping DIA : 70mm
Displacement : 212cc	Blade Speed : 2600rpm
Max. Output : 7.5HP / 3600rpm	Engine Speed : 3600rpm

Green2 CE




TMQJ36 / TMQK36

Engine : 2.2KW	Working depth : 26cm
Displacement: 139cc	Working width: 36cm (4blades) / 59cm (6blades)
Lgnition system : C.D.I	N.W / G.W : 32kgs / 35kgs
Fuel tank capacity : 1.2L	Oil volume : 0.6L


TMQJ60

Engine : 3.0KW	Working depth : 26cm
Displacement: 173cc	Working width: 36cm (4blades)
Lgnition system : C.D.I	N.W / G.W : 35kgs
Fuel tank capacity : 1.2L	Oil volume : 0.6L


TMQK60

Engine : 3.0KW	Working depth : 26cm
Displacement: 173cc	Working width: 59cm (6blades)
Lgnition system : C.D.I	N.W / G.W : 37.5kgs
Fuel tank capacity : 1.2L	Oil volume : 0.6L


TMQZ280J/K

Engine : 4.0KW	Working depth : 35cm
Displacement: 212cc	Working width: 55-85cm
Lgnition system : C.D.I	N.W / G.W : 41kgs / 44kgs
Fuel tank capacity : 4.2L	Oil volume : 0.6L




TM-G750DA

Displacement : 212cc	Tilling Width : 550-800mm
Max.Power: 5.5KW	Tilling Depth: 100-300mm
Fuel Tank Capacity : 3.6L	Handlebar System : Up / Down / Left / Right
Starting System : Recoil Start	Blades : 4Pieces×3Groups


TM-G1050

Displacement : 212cc	Tilling Width : 900-1350mm
Max.Power: 5.5KW	Tilling Depth: 100-300mm
Fuel Tank Capacity : 3.6L	Handlebar System : Up / Down / Left / Right
Starting System : Recoil Start	Blades : 4Pieces×4Groups


TM-D1050

Displacement : 296cc	Tilling Width : 1000-1350mm
Max.Power: 4.6KW	Tilling Depth: 100-300mm
Fuel Tank Capacity : 3.5L	Handlebar System : Up / Down / Left / Right
Starting System : Recoil Start	Blades : 4Pieces×4Groups


TM-D1350DE

Displacement : 418cc	Tilling Width : 1000-1350mm
Max.Power: 6.6KW	Tilling Depth: 100-300mm
Fuel Tank Capacity : 5.5L	Handlebar System : Up / Down / Left / Right
Starting System : E-Start	Blades : 4Pieces×5Groups

