



**OUTDOOR
POWER EQUIPMENT**



RAYHOO

Teammax®

TMAXTOL[®]
OUTDOOR POWER EQUIPMENT

TMAXPLUS

TMAXPRO



CORE VALUE

■ Innovation ■ Passion ■ Reliability ■ Client Loyalty

COMPANY INTRODUCTION

Company Profile	04
Vision	06
Our Sales	07
Quality Assurance	08


GASOLINE GARDEN TOOLS

Petrol Chainsaw	10
Brush Cutter	20
Petrol Multi-tool	32
Hedge Trimmer	36
Earth Auger	38
Blower	41
Sprayer	46
Tiller	49
Wood Chipper	52
Lawn Mower	53

AGRICULTURAL MACHINE

4-Stroke Gasoline Engine	55
Inverter Generator / Generator	57
Water Pump	58
High Pressure Washer	60

BUILDING EQUIPMENT	62
---------------------------------	----

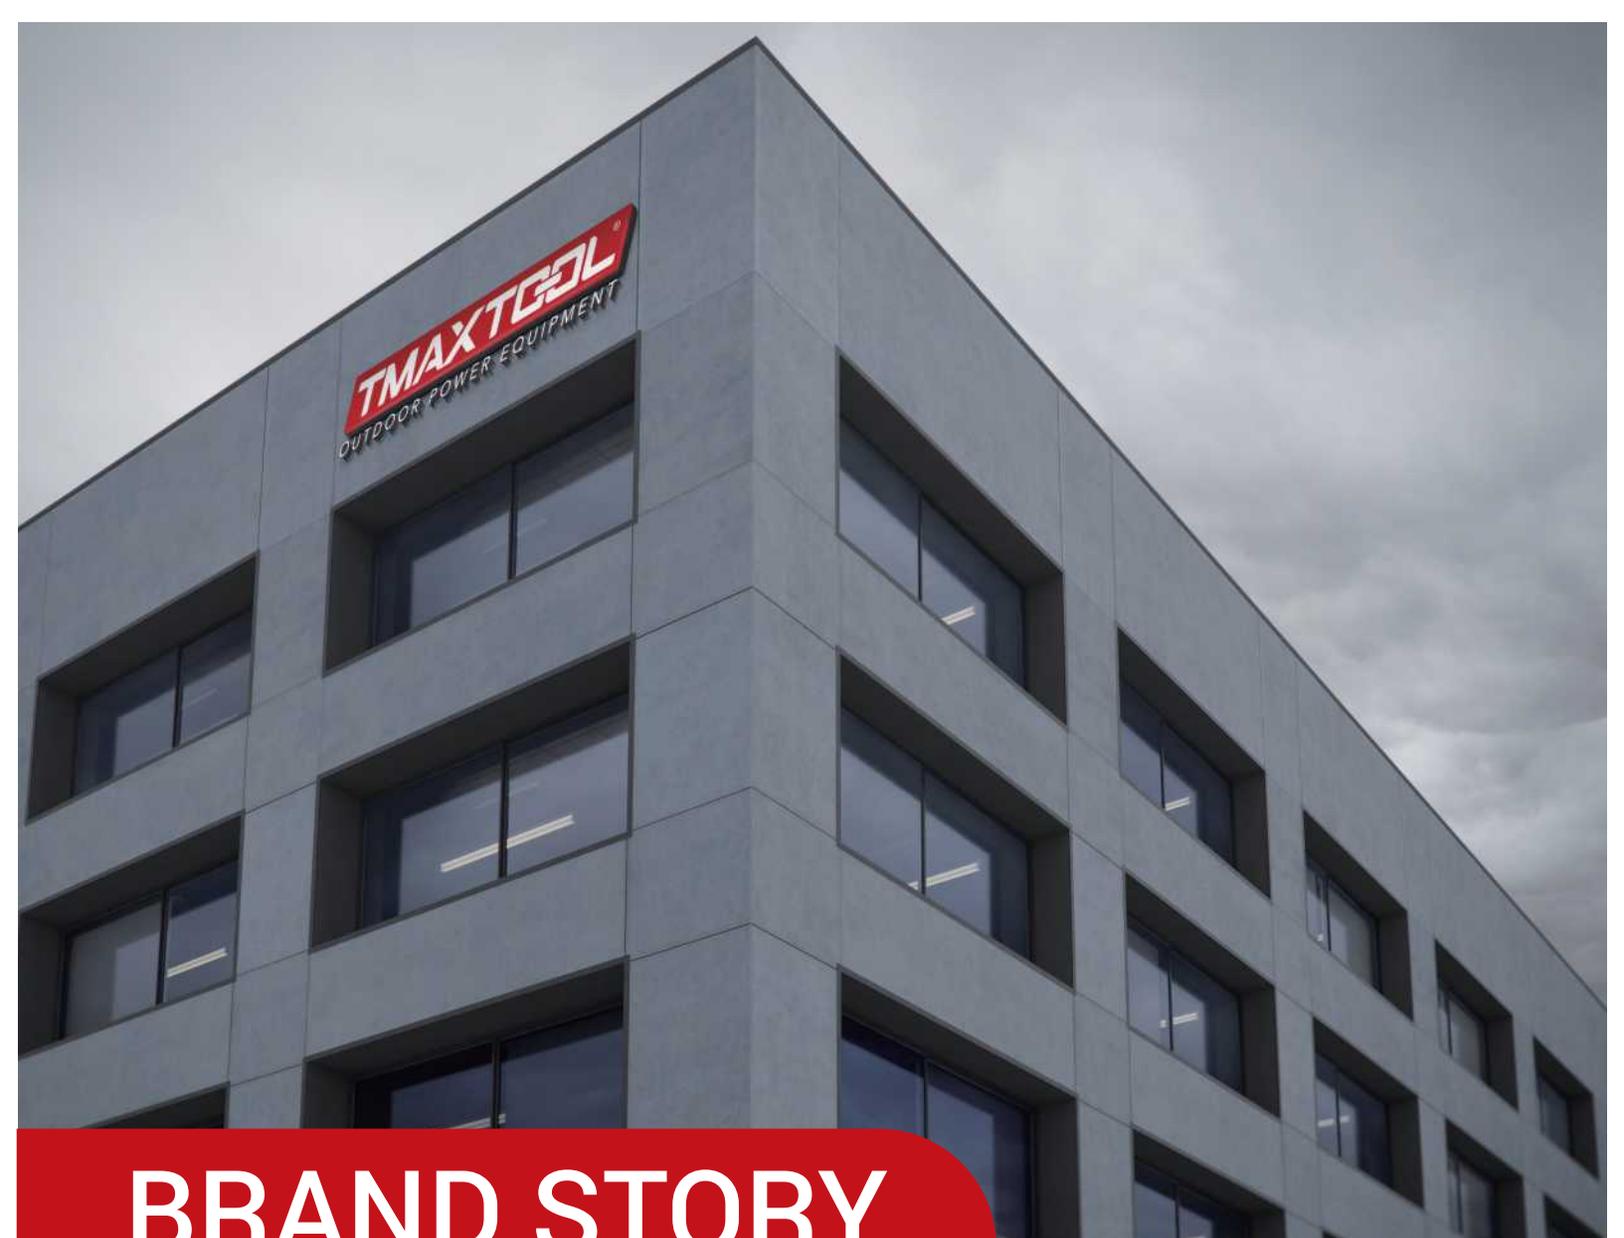

TMAXTOOL
OUTDOOR POWER EQUIPMENT

BRAND STORY

TMAXTOOL specializes in producing various types of tools and equipment, which mainly including gasoline garden tools, Lithium battery garden tools, Power tools and agricultural machine.

Our products are widely used in home garden, public parks, sporting fields, golf courses, and green belt undeveloped, wild, or agricultural land. With an enriched product portfolio of features, sizes and uses, we can satisfy our clients requirements in the work force or at home.

The multi-function of our products and innovative designs, render our products more comfortable with high efficiency, making a safe and effective outdoor product experience.

Due to years of dedication and perseverance, we have formed a differentiated competitive edge, our commitment to total customer solutions. TMAXTOOL's total customer solutions are supported by our innovative designs, powerful production facilities, professional management teams and conscientious services, our products are environmentally friendly and cost efficient characterized by low emission, low oil consumption, low noise and effective damping effects with an optimum combination of price and performance.

Before a sale, we always address our customer's expectations and requirements, from these requirements our service professionals will match or create the best suitable products for their purchase. We will review the order multiple times, leaving no room for error. During our after-sales process, we will trace the feedback from our customer's comments and concerns to make improvements and ultimate better products. Consequently, we have a renowned reputation among our loyal customers throughout Europe, South America, Oceania, Asia.

TO BE TMAXTOOL AGENT

21+ CATEGORIES CONTENTS

2000+ SKU

15+ BENEFITS

IMPROVED IMAGE

EXCLUSIVE PROMOTION

MULTIPLE OPTIONS

SUPPORT COST

NEW PRODUCT PRIORITY

REGULAR MAINTENANCE



Online
Repair
Guidance



Brand
gift



FOC
Samples



Store
Design



Local
Language
Catalogue



Packaging
Design



Market
Analysis



Marketing
Video

PROMOTIONAL GIFT



CORPORATE VISION

“ To be the leading expert of garden tools manufacture in China. ”



BRAND PHILOSOPHY

Passion & ingenuity
Behind every product we
Manufacture.



BRAND MISSION

To create a safe,
Reliable & easy outdoor
Power tool experience.



CUSTOMER MINDSET


High quality outdoor
Power tools with the
Service to match.



TMAX TOOL
OUTDOOR POWER EQUIPMENT

OUR SALES

- Average lead time : 45 days
- Payment term : T/T,LC,Paypal,Cash,Escrow
- Nearest Port : NINGBO,SHANGHAI
- Our export License number : 00807564

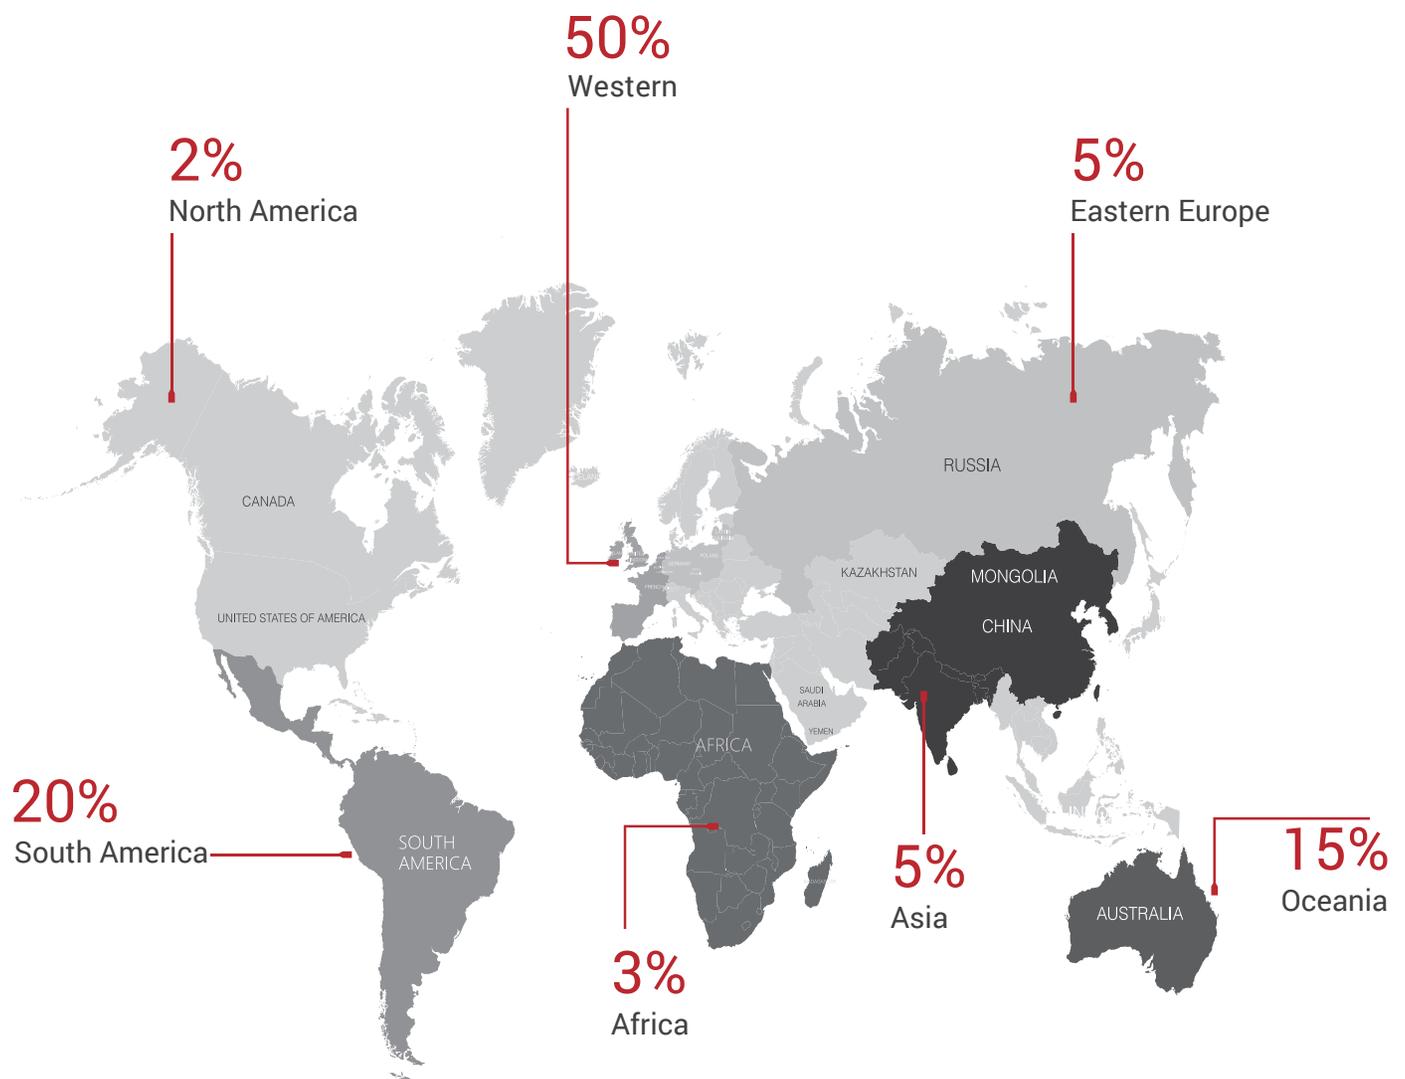

Main Market sales ratio(%)

QUALITY ASSURANCE

- Most of the major parts are made by ourselves to facilitate quality control and new product development .
- Over 90% of our product are TUV certified .
- With the business continuing to expand, and in order to meet customer demand, all members of our employees have been well trained, the company implements standards according to ISO 9000.



TMAXTEOL[®]
TOOLS & EQUIPMENT



CHAIN SAW

Strong power


The Professional Choice Of Power And Reliability

With the continual challenge for the innovative technology, TMAXTOOL offers not more that the word lightest chainsaw, but performance oriented powerful chainsaws. Combining the efficiency, reliability and durability in our feature, you will find the best solution for the various needs.

CHAINSAWS



- ▶ TMAXTOOL robust chainsaws are designed to endure the tough conditions and severe environments. These saws deliver more power and extra durability , as well as the quick maintenance feature within the machine .
- ▶ For pursuing the safety of the professional tree-service workers who often start a chainsaw at the head of a ladder or a tree.

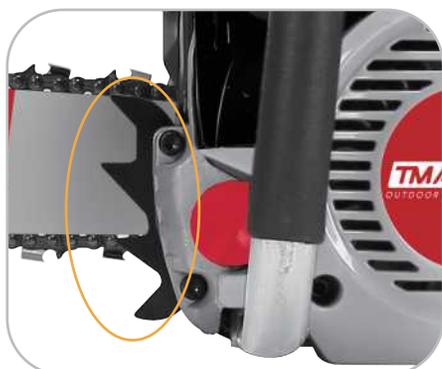

claw for comfort



Starter ergonomically designed, made for more comfort



Safety brake system with double brake support Quick stop



TM2511-3 / TM2511CV-3

Displacement : 25cc	Fuel tank capacity : 190ml	Chain bar length : 10"(255mm) / 12"(300mm)	Sprocket : 3/8" / 1/4"
Maximum power : 1.0KW	Oil tank capacity : 140ml	Guide bar type : Sprocket nose / Carving	Weight : 2.9kg



TM2511-2 / TM2511CV-2

Engine displacement : 25cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 1.0KW	Chain bar length : 10"(255mm) / 12"(300mm)
Fuel tank capacity : 190ml	Weight : 2.5kg
Oil tank capacity : 140ml	Sprocket : 3/8" / 1/4"



TM2511 / TM2511CV

Engine displacement : 25cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 1.0KW	Chain bar length : 10"(255mm) / 12"(300mm)
Fuel tank capacity : 190ml	Weight : 2.5kg
Oil tank capacity : 140ml	Sprocket : 3/8" / 1/4"

TM2500 / TM2500CV



Engine displacement : 25.4cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 0.75KW	Chain bar length : 10"(255mm) / 12"(300mm)
Fuel tank capacity : 230ml	Weight : 3.85kg
Oil tank capacity : 160ml	Sprocket : 3/8" / 1/4"



TM2500-2 / TM2500-2CV



Engine displacement : 25.4cc	Guide bar type : Sprocket nose / Carving
Maximum enging power: 0.75KW	Chain bar length : 10"(255mm) / 12"(300mm)
Fuel tank capacity : 230ml	Weight : 3.85kg
Oil tank capacity : 160ml	Sprocket : 3/8" / 1/4"



TM3800 / TM4100

Engine displacement : 37cc / 42.2cc	Guide bar type : Sprocket nose
Maximum enging power: 1.2KW / 1.3KW	Chain bar length : 16"(405mm)
Fuel tank capacity : 310ml	Weight : 6.0kg
Oil tank capacity : 210ml	Sprocket : 0.325" / 3/8"



TM4500 / TM4600

Engine displacement : 45cc / 46cc	Guide bar type : Sprocket nose
Maximum enging power: 1.7KW / 1.6KW	Chain bar length : 16"(405mm) / 18"(455mm)
Fuel tank capacity : 550ml	Weight : 7.0kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"

TM5200



Engine displacement : 49.3cc	Guide bar type : Sprocket nose
Maximum enging power : 1.8KW	Chain bar length : 20"(505mm)
Fuel tank capacity : 550ml	Weight : 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"



TM5800 / TM6150



Engine displacement : 54.5cc / 63.3cc	Guide bar type : Sprocket nose
Maximum enging power : 2.2KW / 2.4KW	Chain bar length : 20"(505mm) / 22"(555mm)
Fuel tank capacity : 550ml	Weight : 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"



TM3800-4 / TM4100-4

Engine displacement : 37cc / 42.2cc	Guide bar type : Sprocket nose
Maximum enging power : 1.2KW / 1.3KW	Chain bar length : 16"(405mm)
Fuel tank capacity : 310ml	Weight : 6.0kg
Oil tank capacity : 210ml	Sprocket : 0.325" / 3/8"



TM4500-4 / TM5200-4 / TM5800-4 / TM6150-4

Engine displacement : 45cc / 49.3cc / 54.5cc / 63.3cc	Guide bar type : Sprocket nose
Maximum enging power : 1.7KW / 1.8KW / 2.2KW / 2.4KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm) / 22"(555mm)
Fuel tank capacity : 550ml	Weight : 7.0kg / 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"

TM4500-5 / TM5200-5 / TM5800-5 / TM6150-5



Engine displacement : 45cc / 49.3cc / 54.5cc / 63.3cc	Guide bar type : Sprocket nose
Maximum enging power: 1.7KW / 1.8KW / 2.2KW / 2.4KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm) / 22"(555mm)
Fuel tank capacity : 550ml	Weight : 6.0kgs / 7.0kgs / 7.5kgs
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"



TM4500-6 / TM5200-6 / TM5800-6 / TM6150-6



Engine displacement : 45cc / 52cc / 58cc / 60cc	Guide bar type : Sprocket nose
Maximum enging power: 1.8KW / 2.0KW / 2.4KW / 2.8KW	Chain bar length : 16"(405mm) / 18"(455mm) / 20"(505mm) / 22"(555mm)
Fuel tank capacity : 550ml	Weight : 6.0kg / 7.0kg / 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"



PRO

TM6200-6



Engine displacement : 62cc	Guide bar type : Sprocket nose
Maximum enging power: 3.0KW	Chain bar length : 20"(505mm) / 22"(555mm) / 24"(605mm)
Fuel tank capacity : 550ml	Weight : 7.5kg
Oil tank capacity : 260ml	Sprocket : 0.325" / 3/8"



PRO

TM5800P



Engine displacement : 54.5cc	Guide bar type : Sprocket nose
Maximum enging power: 2.8KW	Chain bar length : 18"(455mm) / 20"(505mm) / 22"(555mm)
Fuel tank capacity : 680ml	Weight : 7.0kgs / 7.5kgs
Oil tank capacity : 320ml	Sprocket : 0.325" / 3/8"

TMAXTOOL[®]
TOOLS & EQUIPMENT



CHAIN SAW PRO

Strong power

Chain saw pro

TMAXTOOL compact professional saws are designed for forest professionals , exacting demands of high performance , productivity and durability.

31.8cc



TM66180

Engine displacement : 31.8cc	Maximum cutting length : 40cm
Engine power : 1.5KW	Chain pitch : 3/8"
Chain bar length : 14" / 16" / 18"	Chain gauge(inch) : 0.05"

45.5cc



HOT

TM66250

Engine displacement : 45.5cc	Maximum cutting length : 45cm
Engine power : 2.2KW	Chain pitch : 3/8" / 0.325"
Chain bar length : 14" / 16" / 18" / 20" / 25"	Chain gauge(inch) : 0.05" / 0.063"

TM66361

59cc

Engine displacement : 59cc	Maximum cutting length : 55cm
Engine power : 3.1KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 22" / 24"	Chain gauge(inch) : 0.063"



HOT

TM66381

72cc

Engine displacement : 72cc	Maximum cutting length : 60cm
Engine power : 3.6KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 24" / 25" / 28" / 30"	Chain gauge(inch) : 0.063"



HOT

70.7cc



TM66440

Engine displacement : 70.7cc	Maximum cutting length : 60cm
Engine power : 4.0KW	Chain pitch : 3/8"
Chain bar length : 18" / 20" / 22" / 24" / 25" / 28"	Chain gauge(inch) : 0.063"

40.2cc



TM8840

Engine displacement : 40.2cc	Maximum cutting length : 40cm
Engine power : 1.6KW	Chain pitch : 0.325"
Chain bar length : 18"	Chain gauge(inch) : 0.058"

TM66660

Engine displacement : 91.6cc	Maximum cutting length : 60cm
Engine power : 5.2KW	Chain pitch : 3/8"
Chain bar length : 20" / 22" / 24" / 25" / 30" / 36" / 42"	Chain gauge(inch) : 0.063"

91.6cc

HOT



TM66070

Engine displacement : 105.7cc	Maximum cutting length : 85cm
Engine power : 4.8KW	Chain pitch : 0.404"
Chain bar length : 20" / 22" / 30" / 36" / 42"	Chain gauge(inch) : 0.063"

105.7cc

HOT



65.1cc

HOT



TM88365

Engine displacement : 65.1cc	Maximum cutting length : 55cm
Engine power : 3.4KW	Chain pitch : 3/8"
Chain bar length : 16" / 18" / 20" / 22" / 24" / 25"	Chain gauge(inch) : 0.058"

70.7cc

HOT



TM88372P

Engine displacement : 70.7cc	Maximum cutting length : 55cm
Engine power : 3.9KW	Chain pitch : 3/8"
Chain bar length : 16" / 18" / 20" / 22" / 24" / 28"	Chain gauge(inch) : 0.058"

TM88268 / TM88272 / TM88061 / TM88872

72cc



Engine displacement : 72cc	Maximum cutting length : 60cm
Engine power : 3.6KW	Chain pitch : 3/8"
Chain bar length : 20" / 22" / 24" / 28" / 30"	Chain gauge(inch) : 0.063"

TM88288 / TM88870

87cc



Engine displacement : 87cc	Maximum cutting length : 60cm
Engine power : 4.2KW	Chain pitch : 3/8"
Chain bar length : 20" / 22" / 24" / 25" / 28" / 30" / 36"	Chain gauge(inch) : 0.063"



TMAXTOOL[®]

TOOLS & EQUIPMENT

BRUSH CUTTER

High performance


Ideal For Mowing Large Areas Of Long Grass.

TMAXTOOL Grass trimmers, brushcutters & clearing saws quickly tame long grass and under growth . The machines are fitted with cutting tools to cater for jobs from mowing small areas of grass and edges to thinning out overgrown thickets.Tmaxtool's engines produce significantly less emissions than conventional two-stroke engines,giving you increased fuel efficiency with less impact on the environment.

BRUSH CUTTER



- TMAXTOOL trimmers and brushcutters are designed to provide you with a reliable engine that has low vibration and low noise.
- For working in challenging areas of tough grass 6-point anti-vibration system.
- TEAMMAX 2 stroke engine, increased fuel efficiency with less impact on the environment.

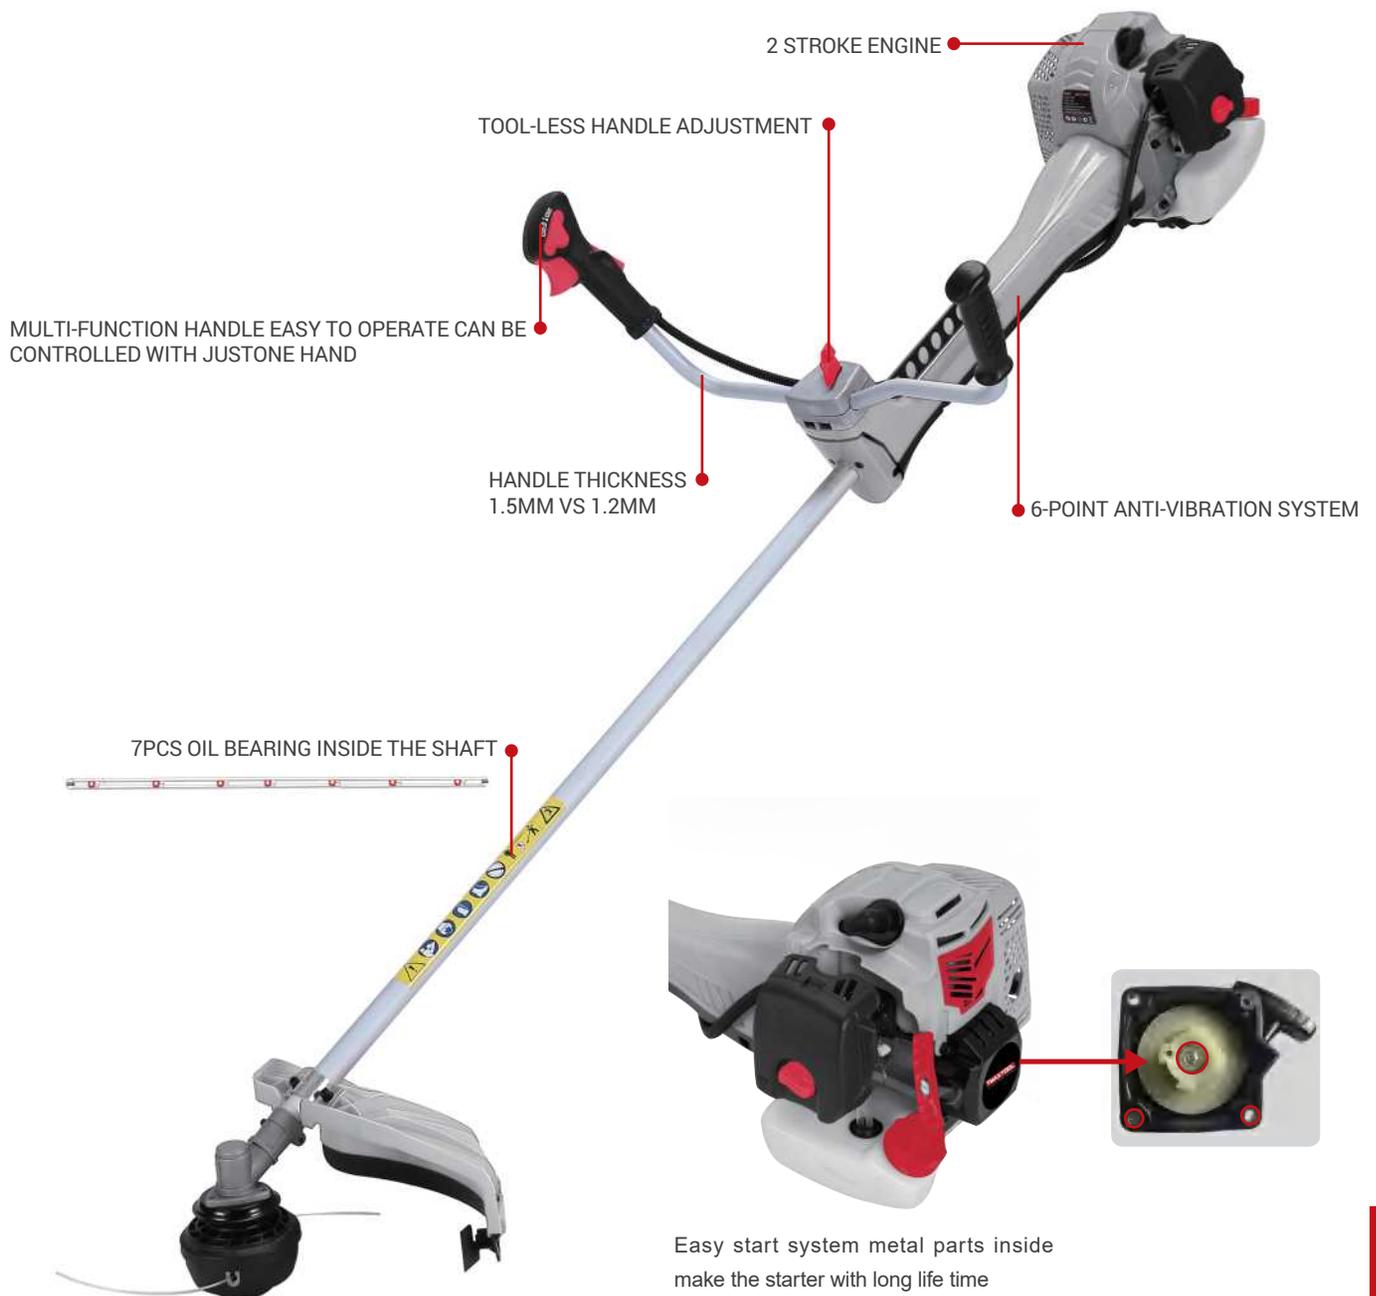



Anti-vibration handle bracket



**TMBC415P-1 / TMBC520P-1 / TMBC620P-1
TMBC650P-1 / TMBC720P-1**



**TMBC415P-2 / TMBC520P-2 / TMBC620P-2
TMBC650P-2 / TMBC720P-2**



P handle



Bicycle handle



Anti-vibration system



Anti-vibration handle



Rotatable handle



Extension pole

Engine :	TM1E40F-5 / 1E44F / 1E47.5F / 1E48F / 1E50F	Shaft diameter :	26mm / 28mm
Displacement:	42.7cc / 51.7cc / 62cc / 65cc / 72.6cc	Belt :	Single belt / Super belt
Power :	1.25KW / 1.6KW / 2.1KW / 2.3KW / 2.5KW	Blade :	Nylon cutter & Metal blade
Cutting diameter :	255mm / 430mm		

BRUSH CUTTER



TMBC260SA
TMBC260A



TMBC305B



TMBC305-6B



P handle



Bicycle handle



Rotatable handle



Extension pole

Engine :	TM1E34F / 1E36F	Shaft diameter :	26mm
Displacement:	25.4cc / 32.6cc	Belt :	Single belt / Super belt
Power :	0.7KW / 1.0KW	Blade :	Nylon cutter & Metal blade
Cutting diameter :	255mm / 430mm		

BRUSH CUTTER



TMBC415 / TMBC520



**TMBC415-4 / TMBC520-4
TMBC620-4 / TMBC650-4**

**TMBC415-6 / TMBC520-6
TMBC620-6 / TMBC650-6**

**TMBC415-7 / TMBC520-7
TMBC620-7 / TMBC650-7**

TMBC720B / TMBC720-7



P handle



Bicycle handle



Anti-vibration system



Anti-vibration handle



Rotatable handle



Extension pole

Engine :	TM1E40F-5 / 1E44F / 1E47.5F / 1E48F / 1E50F	Shaft diameter :	26mm / 28mm
Displacement:	42.7cc / 51.7cc / 62cc / 65cc / 72.6cc	Belt :	Single belt / Super belt
Power :	1.25KW / 1.6KW / 2.1KW / 2.3KW / 2.5KW	Blade :	Nylon cutter & Metal blade
Cutting diameter :	255mm / 430mm		

BACKPACK BRUSH CUTTER

- For effective , flexible mowing on embankments and slopes .
- Perfect for vineyards , orchards and hillsides .
- Comfortable carrying system
- Flexible shaft



Extension pole

Backpack



TMBG415 / TMBG520
TMBG620 / TMBG650



TMBG415-4 / TMBG520-4
TMBG620-4 / TMBG650-4



TMBG415-6 / TMBG520-6
TMBG620-6 / TMBG650-6



TMBG415-7 / TMBG520-7
TMBG620-7 / TMBG650-7

TMHV415 / TMHV520
TMHV620 / TMHV650

TMHV415-4 / TMHV520-4
TMHV620-4 / TMHV650-4

TMHV415-6 / TMHV520-6
TMHV620-6 / TMHV650-6

TMHV415-7 / TMHV520-7
TMHV620-7 / TMHV650-7

Engine :	TME44F / 1E47.5F / 1E48F	Shaft diameter :	26mm
Displacement:	51.7cc / 62cc / 65cc	Belt :	Single belt
Power :	1.6KW / 2.1KW / 2.3KW	Handle :	Loop handle
Cutting diameter :	255mm / 430mm	Blade :	Nylon cutter & Metal blade

HANDPUSH BRUSH CUTTER

- Ideal for home gardens.
- Perfect for mowing small areas of grass and trimming lawn edges.
- Easy to start.



Training Wheels



Durable aluminum alloy wheels



TMBC520D / TMBC620D
TMBC650D



TMBC520D-4 / TMBC620D-4
TMBC650D-4



TMBC520D-6 / TMBC620D-6
TMBC650D-6



TMBC520D-7 / TMBC620D-7
TMBC650D-7

Engine :	TME44F / 1E47.5F / 1E48F	Shaft diameter :	26mm / 28mm
Displacement:	51.7cc / 62cc / 65cc	Cutting diameter :	255mm / 430mm
Power :	1.6KW / 2.1KW / 2.3KW	Blade :	Nylon cutter & Metal blade

Powered by
Kawasaki

Oil
Start Green2
CE EMC EURO-V

BRUSH CUTTER PRO



Anti-vibration
handle bracket

TJ45E / TJ53E



P handle



Bicycle handle



Anti-vibration system



Anti-vibration handle



Rotatable handle



Backpack

Displacement :	45.4cc / 53.2cc	Cutting diameter :	255mm / 430mm
Power :	1.42KW / 2.0KW	Belt :	Single belt
Fuel mixture ratio :	50:1	Blade :	Nylon cutter & Metal blade
Shaft diameter :	26mm / 28mm		

Powered by
HONDA

Soft
Start Green2
CE EMC EURO-V

BRUSH CUTTER PRO ●



P handle



Bicycle handle



Anti-vibration system



Anti-vibration handle



Rotatable handle



Backpack

Displacement :	35.8cc	Cutting diameter :	255mm / 430mm
Power :	0.9KW	Belt :	Single belt
Fuel mixture ratio :	50:1	Blade :	Nylon cutter & Metal blade
Shaft diameter :	26mm / 28mm		

Powered by
MITSUBISHI
 GASOLINE ENGINE

BRUSH CUTTER PRO

Off Start Green2
 CE EMC EURO-V



Anti-vibration handle bracket

**TUE26FD / TUE43FD
 TUE48FD**



P handle



Bicycle handle



Anti-vibration system



Anti-vibration handle



Rotatable handle



Displacement:	25.7cc / 42.7cc / 47.1cc	Cutting diameter :	255mm / 430mm
Power :	0.8KW / 1.26KW / 1.8KW	Belt :	Single belt
Fuel mixture ratio :	50:1	Blade :	Nylon cutter & Metal blade
Shaft diameter :	26mm / 28mm	Fuel tank capacity :	0.6L / 0.9L / 0.9L


TUE26FD

TUE43FD

TUE48FD

TJ45E / TJ53E

GX35

TMBC443

TMBC541


TMBC120 / TMBC250

Model	Displacement	Power	Fuel mixture ratio
TUE26FD	25.7cc	0.8KW	50:1
TUE43FD	42.7cc	1.26KW	50:1
TUE48FD	47.1cc	1.8KW	50:1
TJ45E	45.4cc	1.42KW	50:1
EJ53E	53.2cc	2.0KW	50:1

Model	Displacement	Power	Fuel mixture ratio
GX35	35.8cc	0.9KW	/
TMBC443	41.5cc	1.47KW	30:1
TMBC541	41.5cc	1.47KW	30:1
TMBC120	30.8cc	1.3KW	40:1
TMBC250	40.2cc	1.6KW	40:1


Trimmer head

BRUSH CUTTER ACCESSORIES

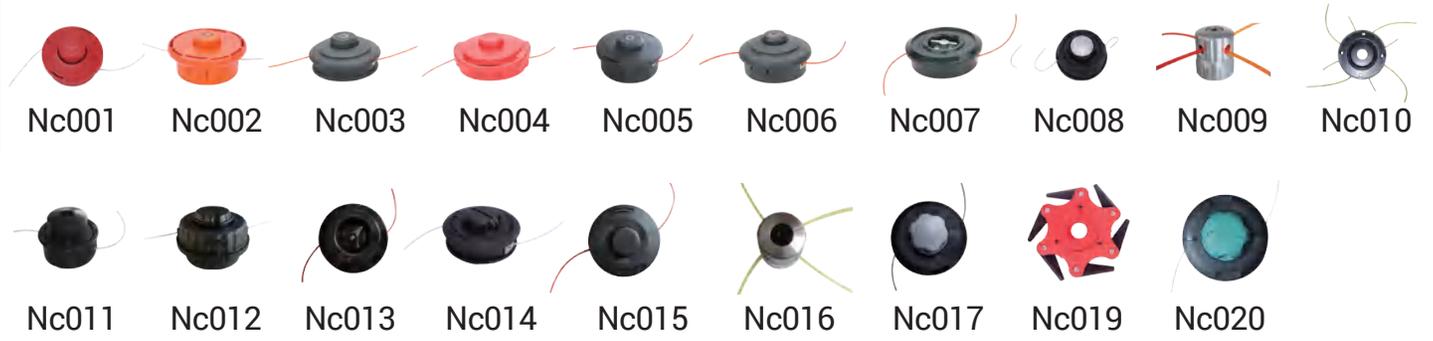

Blade

Guards

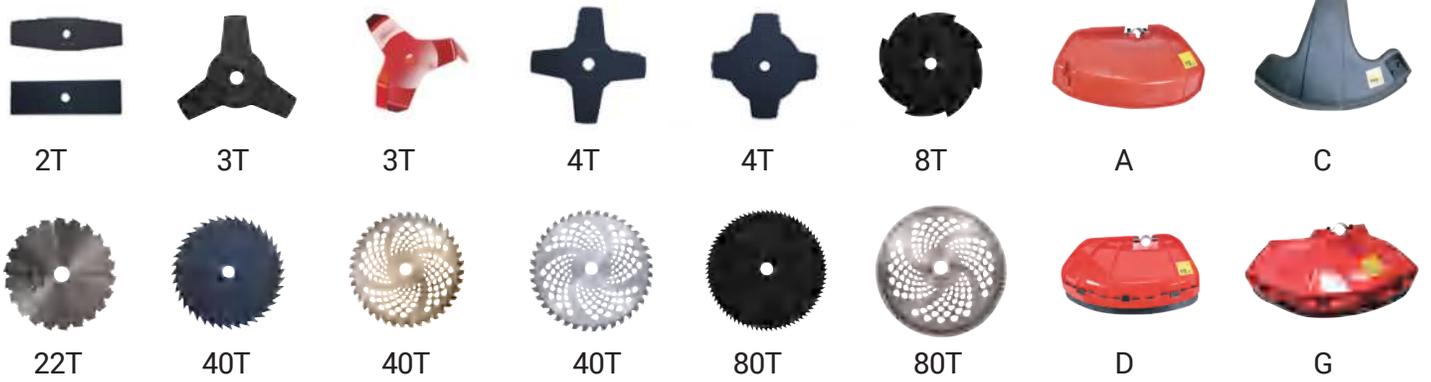

Handle for brush cutter



Safety Kits



Belt





TMAXTEQ[®]
TOOLS & EQUIPMENT

PETROL MULTI-TOOL

Multi-tool

The professional choice of power and reliability.

Ideal for cutting on steep embankments , ingrown slopes , narrow ditches , vineyards or orchards.
The weight carried on the user's back for maximum comfort via a support frame.
Lightweight multi tool trimmers for landscape professionals.

MULTI-FUNCTION ATTACHMENT PARTS



Brush Cutter



Grass Trimmer



Pole Saw



Hedge Trimmer



Olive Harvester



Concrete Vibrator



Rice Harvester



Tiller



Grass Edge Cutter



Blower



Weeder



Ripper



Sweeper



knifehead



Shovel Head



Loosening
Machine Head



TMM415 / TMM520



TMM415-4 / TMM520-4
TMM620-4 / TMM650-4



TMM415-6 / TMM520-6
TMM620-6 / TMM650-6



TMM415-7 / TMM520-7
TMM620-7 / TMM650-7

Displacement :	42.7cc / 51.7cc / 62cc / 65cc / 72.6cc	Pole pruner bar length :	10"(255mm) / 12"(300mm)
Output power :	1.25KW / 1.6KW / 2.1KW / 2.3KW / 2.5KW	Three teeth blade dia :	255mm
Shaft dia :	26mm / 28mm	Hedge trimmer cutting length :	430mm
Oil tank capacity :	150ml		



TMM260A



TMM305



TMM305-6

Displacement:	25.4cc / 32.6cc	Pole pruner bar length:	10"(255mm) / 12"(300mm)
Output power :	0.7KW / 1.0KW	Three teeth blade dia :	255mm
Shaft dia :	26mm / 28mm	Hedge trimmer cutting length :	430mm
Oil tank capacity :	150ml		



TMCH260

Engine TMBC1E34F	Weight 8.5kgs / 8kgs
Displacement: 25.4cc	Type of head: 24 sticks / 12 sticks
Maximum enging power 0.75KW	Swing reduction ratio 40:14

TMCH305

Engine TM1E36F	Weight 8.5kgs / 8kgs
Displacement: 32.6cc	Type of head: 24 sticks / 12 sticks
Maximum enging power 1.0KW	Swing reduction ratio 40:14



TMAXTECH[®]
TOOLS & EQUIPMENT



HEDGE TRIMMER

Excellent Anti-vibration System

The professional choice of power and reliability.

Exclusively designed for powerful efficient cutting to hedges and shrubs low weight and excellent cutting performance are both key for shaping delicate ornamental and woody hedges.



180° degree adjustable handle



Locking blade screw



Excellent anti-vibration system

HEDGE TRIMMER

TMHT230B-2 / TMHT260B-2



Engine : TMHT1E32F / TMHT1E34F	Start system : Recoil
Displacement : 22.5cc / 25.4cc	Blade : Double side blade
Power : 0.65KW / 0.9KW	Blade length : 600mm / 700mm
Fuel tank capacity : 580ml / 530ml	Cutting length : 550mm / 620mm
Ignition : CDI	Fuel / Oil mixture ratio : 25:1



HEDGE TRIMMER

TMHT230B / TMHT260B



Engine : TMHT1E32F / TMHT1E34F	Start system : Recoil
Displacement : 22.5cc / 25.4cc	Blade : Double side blade
Power : 0.65KW / 0.9KW	Blade length : 600mm / 700mm
Fuel tank capacity : 580ml / 530ml	Cutting length : 550mm / 620mm
Ignition : CDI	Fuel / Oil mixture ratio : 25:1



EARTH AUGER

2-stroke, air-cooled, 1-cylinder

Ideal for large areas that are usually hard to access.

One-man auger with Quick stop drill brake . Suitable for a large variety of tasks form drilling simple holes in the ground totaking soil samples from the borehole.Framework padding isincluded



TMD520-1



TMD520-2



TMD520-3



TMD520-3D



**TMD520-4 / TMD620-4
TMD650-4**



**TMD520-6 / TMD620-6
TMD650-6**



**TMD520-7 / TMD620-7
TMD650-7**



TMD720

Engine model :	1E44F / 1E47.5F / 1E48 / 1E50F	Engine :	2-stroke, air-cooled, 1-cylinder
Displacement :	51.7cc / 62cc / 65cc / 72.6cc	Max engine speed :	10000rpm
Power :	1.6KW / 2.1KW / 2.3KW / 2.5KW	Fuel / Oil mixture ratio :	25:1
Ldling speed :	3000±200rpm	Fuel tank capacity :	1.2L

Earth Auger Accessories



Single-wheel earth auger frame



Brake system




Damping spring




Drill bit type



Normal blade

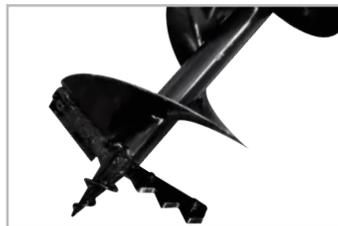

Single leaf / Steel drill head /
Replaceable blade

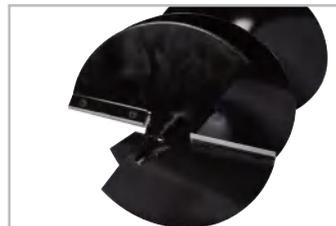

Replaceable blade



Double leaf / Steel drill head /
Normal blade

Drill Bit size



Diameter: 80mm / 100mm / 150mm / 200mm / 250mm / 300mm
Length: 80cm-100cm

Extension Rods



30mm / 60mm / 80mm / 100mm



BLOWER

lightweight & high blowing

TMAXTOOL offers powerful, lightweight & high blowing capacity blower.

TMAXTOOL offers both backpack blowers with a professional capacity and lightweight handheld blowers for home use.

They are easy to operate with high blowing capacity and bring the powerful & satisfying result.



TMB260A



Engine model : TMBC1E34F	Blowing rate : ≥0.2m³/s
Displacement : 25.4cc	Wind speed : ≥70m/s
Max engine power : 0.7KW / 7500rpm	Fuel mix ratio : 25:1

TMBV260A



Engine model : TMBC1E34F	Blowing rate : ≥0.2m³/s
Displacement : 25.4cc	Wind speed : ≥70m/s
Max engine power : 0.7KW / 7500rpm	Fuel mix ratio : 25:1



TMEB260



Engine model : TMBC1E34F	Blowing rate : ≥0.17m³/s
Displacement : 25.4cc	Wind speed : ≥68m/s
Max engine power : 0.7KW / 7500rpm	Fuel mix ratio : 25:1

TMEBV260



Engine model : TMBC1E34F	Blowing rate : ≥0.17m³/s
Displacement : 25.4cc	Wind speed : ≥68m/s
Max engine power : 0.7KW / 7500rpm	Fuel mix ratio : 25:1



TMEB925

Type : Portable	Air Speed : 65m/s
Displacement : 25.4cc	Air volume : 468m³/h
Max engine power : 0.75KW	Oil-tank capacity : 0.7L

TMEBV925



Type : Portable	Air speed : 65m/s
Displacement : 25.4cc	Air volume : 468m³/h
Max engine power : 0.75KW	Oil-tank capacity : 0.7L



TMEB430F/TMEB520A

Engine model : 1E40F-5B / 1E44F-2A	Blowing rate : 0.2m³/s
Displacement : 42.7cc / 51.7cc	Wind speed : 74m/s / 76m/s
Max engine power : 1.25KW / 7000rpm / 1.4KW / 7000rpm	Fuel mix ratio : 25:1

TMEB430A



Engine model : 1E40F-5B	Blowing rate : 0.2m³/s
Displacement : 42.7cc	Wind speed : 69m/s
Max engine power : 1.25KW / 7000r/min	Fuel mix ratio : 25:1



TMEB430C / TMEB520C

Engine model : 1E40F-5B / 1E44F-2A	Blowing rate : 0.2m³/s
Displacement : 42.7cc / 51.7cc	Wind speed : 74m/s / 76m/s
Max engine power : 1.25KW / 7000rpm / 1.4KW / 7000rpm	Fuel mix ratio : 25:1

TMEB630B



Engine model : 1E48FP	Blowing rate : 0.24m³/s
Displacement : 63.3cc	Wind speed : 78m/s
Max engine power : 2.6KW / 7000r/min	Fuel mix ratio : 25:1



TMEB630C

Engine model : 1E48FP	Blowing rate : 0.24m³/s
Displacement : 63.3cc	Wind speed : 78m/s
Max engine power : 2.6KW / 7000r/min	Fuel mix ratio : 25:1

TMEB760A



Engine model : 1E51F	Blowing rate : 0.3m³/s
Displacement : 75.6cc	Wind speed : 80m/s
Max engine power : 3.1KW / 7000r/min	Fuel mix ratio : 25:1

Of Start Green2
 CE EMC EURO-V



TMEB760C

Engine model : 151F	Blowing rate : 0.28m³/s
Displacement : 75.6cc	Wind speed : 80m/s
Max engine power : 2.4KW / 7000r/min	

TMEB437

Engine model : 140FA	Blowing rate : 0.2m³/s
Displacement : 37.7cc	Wind speed : 58m/s
Max engine power : 1.0KW / 6500r/min	

Of Start Green2
 CE EMC EURO-V



TMEB420

Engine model : 1E40FP-3Z	Blowing rate : 0.24m³/s
Displacement : 41.5cc	Wind speed : 72m/s
Max engine power : 2.13KW / 7500r/min	Fuel mix ratio : 25:1

Of Start Green2
 CE EMC EURO-V



TMEB800A

Type : Backpack	Air speed / Max speed : 80m/s / 108m/s
Displacement : 79.9cc	Air volume : 2302m³/h
Max engine power : 4.3KW	Oil-tank capacity : 2.7L

Of Start Green2
 CE EMC EURO-V





SPRAYER

Efficient automatization expert

Spray machine, as a kind of equipment that can efficiently disperse liquid into fog, plays an indispensable role in many fields, greatly improving work efficiency and quality.

From vast farmland to bustling urban construction sites, from industrial production workshops to the front lines of health and epidemic prevention, the presence of sprayers is everywhere.



769M



708



767M



767



768



TM3WZ-6



2STROKE



4STROKE



4STROKE

Engine	Displacement	Power	Fuel	Speed	Cylinder	Dia.of plunger	Working pressure	Max flow	Tank capacity
TU26	25.6cc	0.70KW	25:1	6500r / min	2	18mm	1.5-2.5Mpa	8L/min	25L
139	31cc	0.75KW	/	6500r / min	4	18mm	1.5-2.5Mpa	8L/min	25L
GX35	35.8cc	1KW	/	6500r / min	4	18mm	1.5-2.5Mpa	8L/min	25L



TM3WF-2.6

Displacement : 41.5cc	Chemical tank : 14 L / 16L / 20L / 26L
Standard power: 1.63KW / 6000r/min	Fuel tank capacity : 1.4L
Range : ≥12M	Mixed fuel ratio : 25:1

TM3WF-3A



Displacement : 41.5cc	Chemical tank : 14L / 16L / 20L / 26L
Standard power: 2.13KW / 7500r/min	Fuel tank capacity : 1.4L
Range : ≥12M	Mixed fuel ratio : 25:1



TM3WF-808

Displacement : 42.7cc	Chemical tank : 14L / 20L
Standard power: 1.25KW / 7000r/min	Fuel tank capacity : 2.1L
Range : ≥12M	Mixed fuel ratio : 25:1

TM3WF-600



Displacement : 56.5cc	Chemical tank : 14L
Standard power: 2.5KW / 7500r/min	Fuel tank capacity : 1.6L
Range : ≥15M	Mixed fuel ratio : 25:1



TILLER

Seeder machine, fast feed ,fast working arable land and sowing at same time.



One-man tiller with Quick stopdrill brake . Suitable for a large variety of tasks from drillings simple holes in the ground totaking soil samples from the borehole. Framework padding is included



**TMC520 / TMC620
TMC650**



**TMC520-2 / TMC620-2
TMC650-2**



**TMC620-3 / TMC650-3
TMC720-3**



**TMC520-4 / TMC620-4
TMC650-4**



**TMC520-6 / TMC620-6
TMC650-6**



**TMC520-7 / TMC620-7
TMC650-7**



TMC720

4 Blades



6 Blades



Engine model :	1E44F / 1E47.5F / 1E48F / 1E50F	Engine :	2-stroke, air-cooled, 1-cylinder
Displacement:	51.7cc / 62cc / 65cc / 72.6cc	Max engine speed :	10000rpm
Power :	1.6KW / 2.1KW / 2.3KW / 2.5KW	Fuel / Oil mixture ratio :	25:1
Ldling speed :	3000±200rpm	Fuel tank capacity :	1.2L



TM-G750DA



Displacement : 212cc	Tilling width : 550-800mm
Max.power : 5.5KW / 7.5HP	Tilling depth: 100-300mm
Fuel tank capacity : 3.6L	Handlebar system : Up / Down / Left / Right
Starting system : Recoil Start	Blades : 4Pieces×3Groups

TM-G900




Displacement : 212cc	Tilling width : 800-1000mm
Max.Power: 5.5KW / 7.5HP	Tilling depth: 100-300mm
Fuel tank capacity : 3.6L	Handlebar system : Up / Down
Starting system : Recoil Start	Blades : 4Pieces×3Groups

TM-G1050



Displacement : 212cc	Tilling width : 900-1350mm
Max.power: 5.5KW / 7.5HP	Tilling depth: 100-300mm
Fuel tank capacity : 3.6L	Handlebar system : Up / Down / Left / Right
Starting system : Recoil Start	Blades : 4Pieces×4Groups

TM-D1350DE



Displacement : 418cc	Tilling width : 1000-1350mm
Max.Power: 6.6KW / 9HP	Tilling depth: 100-300mm
Fuel tank capacity : 5.5L	Handlebar system : Up / Down / Left / Right
Starting system : E-Start	Blades : 4Pieces×5Groups



4-STROKE TILLER ●



TMQJ36 / TMQK36

Engine : 2.2KW	Working depth : 26cm
Displacement: 139cc	Working width: 36cm (4blades) / 59cm (6blades)
Fuel tank capacity : 1.2L	Oil volume : 0.6L
Lgnition system : C.D.I	N.W / G.W : 29kgs / 32kgs



TMQJ60 / TMQK60

Engine : 3.0KW	Working depth : 26cm
Displacement: 173cc	Working width: 36cm (4blades) / 59cm (6blades)
Fuel tank capacity : 1.2L	Oil volume : 0.6L
Lgnition system : C.D.I	N.W / G.W : 35kgs / 37.5kgs

WOOD CHIPPER ●



TM-704M-C

Max chipping DIA : 60mm	Fuel volume : 3.6L
Displacement : 212cc	Oil volume: 0.6L
Max. output : 7.5HP / 3600rpm	Fuel type : Unleaded Gasoline

TM-701

Max chipping DIA : 120mm	Fuel volume : 6.5L
Displacement : 420cc	Oil volume: 1.1L
Max. output : 15.0HP / 3600rpm	Fuel type : Unleaded Gasoline





LAWN MOWER

Lawn mower / Brush cutter with universal wheel

It is a type used for cutting grass and garden weeds.

And mechanical equipment for trimming and maintaining lawns, as well as green environmental protection equipment.



HONDA

TM-LMB51S28(DOV170)

Engine model : GCV170	Cutting height: 25-75mm / 7 positions
Displacement : 166cc	Grass catcher type: Half plastic cover + Fabric bag
Power : 2.4KW	Grass catcher volume : 65L
Cutting width : 508mm (20inch)	Discharge function : Rear bagging / Rear discharge / Mulching / Side discharge

TM-LMB51S28(DOV750)

Engine model : DOV750	Cutting height: 25-75mm / 7 positions
Displacement : 161cc	Grass catcher type: Half plastic cover + Fabric bag
Power : 2.7KW	Grass catcher volume : 65L
Cutting width : 508mm (20inch)	Discharge function : Rear bagging / Rear discharge / Mulching / Side discharge



Briggs & Stratton



TM-LMC53S28 (DV170)

Engine model : DV170	Cutting height: 30-80mm / 6 positions
Displacement : 166cc	Grass catcher type: Half plastic cover + Fabric bag
Power : 2.8KW	Grass catcher volume : 70L
Cutting width : 530mm (21inch)	Discharge function : Rear bagging / Rear discharge / Mulching / Side discharge

TM-LMD53S31 (V200)

Engine model : V200	Cutting height: 30-80mm / 6 positions
Displacement : 196cc	Grass catcher type: Half plastic cover + Fabric bag
Power : 4KW	Grass catcher volume : 70L
Cutting width : 530mm (21inch)	Discharge function : Rear bagging / Rear discharge / Mulching / Side discharge





GASOLINE ENGINE

4-STROKE PRODUCTS

The products include: inverter generator / water pump / high pressure washer / wood chipper / 4-stroke tiller.

4-STROKE GASOLINE ENGINE ●

green2 CE
EMC EURO-V



Model	168F-1	170F	177F	188F	190F	192F	192FC
Type	Air-cooled, single cylinder, 4 stroke OHV gasoline engine						
Horse Power(HP)	6.5	7.0	9	13	15	17	18
Displacement (cc)	196	210	270	389	407	420	467
Bore×stroke (mm)	68x54	70x54	77x58	88x64	90x66	92x66	92x70
Oil Capacity(L)	0.6	0.6	1.1	1.1	1.1	1.1	1.1
Fuel tank capacity (L)	3.6	3.6	6	6.5	6.5	6.5	6.5
Starting system	Recoil and hand -operated(electric optional)						
Net weight (Kg)	15	15	26	34	34	34	35

● Perfect engine for generator, pressure washer and water pump.



Green2 CE
EMC EURO-V



INVERTER GENERATOR

TMBS2350IS / TMBS2850IS

Engine type : Air-cooled, Single cylinder, 4-Stroke	Max. power : 2.0KW / 2.5KW
Displacement : 79.7ml / 98ml	Fuel tank capacity : 5.5L
Rated voltage : 220V	Continuum running time : 5h
Rated frequency : 50Hz	Weight : 18kgs / 19kgs

INVERTER GENERATOR

TMBS3850iSE

Green2 CE
EMC EURO-V



Engine type : Air-cooled, Single cylinder, 4-Stroke	Max.power : 3.5KW
Displacement : 151ml	Fuel tank capacity : 5.5L
Rated voltage : 220V	Continuum running time : 2.6H
Rated frequency : 50Hz	Weight : 23.5kgs

GENERATOR

TMBS2500 / TMBS3500

Green2 CE
EMC EURO-V



Engine type : 4 Stroke,Air-cooled	Max. power : 2.2KW / 3.0KW
Engine displacement: 212cc	Fuel tank capacity : 15L
Rated frequency : 50Hz	Continuous running time : 9h
Rated voltage : 220V	Weight : 41kgs / 46kgs

GENERATOR

TMBS6500 / TMBS10000E

Green2 CE
EMC EURO-V



Engine type : 4 Stroke,Air-cooled	Max. power : 5.5KW / 8.0KW
Engine displacement: 420cc / 460cc	Fuel tank capacity : 25L
Rated frequency : 50Hz	Continuous running time : 9h / 8h
Rated voltage : 220V	Weight : 82kgs / 91kgs



WATER PUMP



Model	TMQGZ25-6-20C	TMQGZ25-6-20
Displacement :	42.7cc	40.2cc
Suction length:	6m	7m
Lift :	20m	30m
Flow :	6m ³ /h	8m ³ /h
Water outlet diameter:	25mm	25mm
Stipulation suction time:	<80s	<80s

Green2 CE
EMC EURO-V



TMWP15X

Displacement : 97cc	Discharge port diameter : 40mm(1.5")
Pump set : Self-priming pump	Total head lift: 15m
Suction port diameter : 40mm(1.5")	Discharge capacity: 10m³/h

TMWP20X / TMWP30X / TMWP40X

Green2 CE
EMC EURO-V



Displacement : 212cc / 212cc / 270cc	Discharge port diameter : 50mm(2") / 80mm(3") / 100mm(4")
Pump set : Self-priming pump	Total head lift: 35m / 30m / 35m
Suction port diameter : 50mm(2") / 80mm(3") / 100mm(4")	Discharge capacity: 25m³/h / 35m³/h / 60m³/h

Green2 CE
EMC EURO-V



TMWP20I / TMWP30I

Displacement : 212cc / 389cc	Discharge port diameter : 50mm(2") / 60mm(2.5")
Pump set : Cast Iron pump	Total head lift : 50m / 75m
Suction port diameter : 60mm(2.5") / 80mm(3")	Discharge capacity: 40m³/h / 50m³/h

TMWP30S

Green2 CE
EMC EURO-V



Displacement : 212cc	Discharge port diameter : 80mm(3")
Pump set : Centrifugal pump	Total head lift: 19m
Suction port diameter : 80mm(3")	Discharge capacity: 36m³/h

TMAXTECH[®]

TOOLS & EQUIPMENT



**HIGH PRESSURE
WASHER**

Green2 CE EMC



TM-170A / TM-180A

Power : 6.5HP / 7.0HP	Working pressure : 170BAR / 180BAR
Displacement: 196cc / 210cc	PSI : 2465PSI / 2755PSI 2600PSI / 2900PSI
Max pressure : 190BAR / 200BAR	Flow : 9.2LPM / 2.45GPM

TM-170NB / TM-180NB

Green2 CE EMC



Power : 6.5HP / 7.0HP	Working pressure : 170BAR / 180BAR
Displacement: 196cc / 210cc	PSI : 2465PSI / 2755PSI 2600PSI / 2900PSI
Max pressure : 190BAR / 200BAR	Flow : 9.2LPM / 2.45GPM

Green2 CE EMC



TM-200A / TM-250A

Power : 15.0HP	Working pressure : 180BAR / 250BAR
Displacement: 389cc / 407cc	PSI : 2500PSI / 2900PSI 3700PSI/4000PSI
Max pressure : 200BAR / 275BAR	Flow : 12.6LPM / 3.36GPM 15LPM / 4.8GPM

TM-200NB / TM-250NB

Green2 CE EMC



Power : 15.0HP	Working pressure : 180BAR / 250BAR
Displacement: 389cc / 407cc	PSI : 2500PSI / 2900PSI 3700PSI/4000PSI
Max pressure : 200BAR / 275BAR	Flow : 12.6LPM / 3.36GPM 15LPM / 4.8GPM

Tmaxtool cutting machine is a convenient all-round petrol push floor saw. The adjustable handle ensures an ergonomic working position. Perfect weight distribution gives excellent stability while sawing. Ideal for small road repair jobs in concrete or asphalt.



BUILDING EQUIPMENT

TAMPING RAMMER

TM-SR75



NEW

Engine model : Honda GX160 / 168F	Jump stroke : 40-65mm
Impact frequency : 600-700t/min	Impact force : 12KN
Bottom plate size : 300*280mm	Fuel tank capacity : 2.8L

LEVELING MACHINE

TM-SFS-1

Engine model : Gasoline / Honda GX35	1.5HP
Air-cooled	Blade thickness : 6mm / 8mm
4-cycle	Length : 1m-5m



POWER TROWEL

TM-ST80

Engine model : HONDA GX160 / 168F	Driving speed : 50-100rpm
Trowel diameter : 800mm	Blade dimension : 265*150mm
Number of blades : 4	



PLATE COMPACTOR

TM-SC77W

Engine model : Honda GX160 / 168F	Centrifugal force : 13.5KN
Vibration frequency : 5600(90)Hz	travel speed : 15-20m/min
Limited grade ability : 20	Plate size : 560*475mm



CONCRETE CUTTER

TM-SCT-1

Engine model : HONDA GX160 / 168F	Max cutting depth : 9cm
Water tank capacity : 14L	Blade size : 30-35cm(12-14in)
Blade speed : 3600rpm	Depth adjustment : Handle rotation





Zhejiang Teammax Tool Manufacture Co., Ltd.

T. +86-579-82923707 W. www.tmaxtool.com E. info@tmaxtool.com
ADD. No.17 Technology Park, Caozhai ,Jindong District, Jinhua City,Zhejiang,China.