



claber

GARDENLIFE  
2025





## THINK OF THE WORLD AS EVERYONE'S BACKYARD

Step onto grass and let a breath of fresh air wash over you. Awaken the senses with fresh smells and new shoots, reflecting the love and attention we put into caring for our green spaces.

We see the world as one big garden, but turning this dream into a reality requires us all to take concrete actions.

At Claber, we work hard every day to inspire a new culture, coming up with new ways of making watering easier for you, and more efficient and sustainable for the environment. We set ourselves increasingly ambitious goals, focusing not only on our products but everything that surrounds them, like the packaging, made with sustainable, recyclable materials.

We're moving towards a brighter, more environmentally aware tomorrow, one step at a time.

**claber**<sup>®</sup>

# INDEX

From Claber expertise comes the most extensive range of DIY irrigation products in the market. Three specific lines offering tailor-made solutions; several product families made to last and that make everyday irrigation easier.



NEW TECH: NOURISHING TOMORROW 4



THE PROFESSIONAL LINE 174

MERCHANDISING 178

PRODUCT CODE LIST 184

## PACKAGING KEY TO SYMBOLS

-  Dispenser (size L 20 x H 13 x W 39)
-  Small dispenser (size L 10 x H 13 x W 39)
-  Hanging carded pack
-  Roll of hose
-  Box
-  Pallet

## ABOVE-GROUND IRRIGATION

10 - 83



	TAP CONNECTORS	14
	QUICK-CLICK SYSTEM AUTOMATIC COUPLINGS	20
	SPRAY NOZZLES AND PISTOLS	24
	ERGOGRIIP SYSTEM	22
	AQUAMASTER	30
	METAL-JET	36
	SPRINKLERS	42
	PULSATING SPRINKLERS	48
	HOSE REELS AND CARTS	52
	ROTOROLL EVOLUTION	62
	SPRAYERS	66
	SHOWER, CARRY CART, CLEANING	68
	HAPPY FRESH EVOLUTION	70
	HOSES	72
	TWIDDY	80
	SPIRAL KIT	82

## DRIP IRRIGATION

84 - 133



	BATTERY WATER TIMERS	88
	MYAQUASOLAR TEMPO AND DUAL TIMERS	96
	POLYETHYLENE HOSES	100
	TRIPLE-SPRINKLER HOSE	105
	TAP CONNECTORS	106
	BLOCK-SYSTEM	108
	COUPLINGS	114
	DRIPPERS	116
	READY-TO-USE KIT	120
	MICRO-SPRINKLERS	124
	AQUA-MAGIC SYSTEM	126
	IDRIS SPIKE	128
	OASIS EVOLUTION	130
	AQUALUX SYSTEM	131

## UNDERGROUND IRRIGATION

134 - 173



	COLIBRÌ SYSTEM	138
	TURBO-JET	141
	MULTIPLA	142
	AQUA-HOME	143
	HYDRO-4	144
	PROGRAMMABLE SOLENOID VALVES	146
	SOLENOID VALVE	147
	VALVE BOXES	166
	POP-UP SPRINKLERS	150
	TURBINES	156
	ACCESSORIES	160
	PIPES	167
	COMPRESSION CONNECTORS	168

# NEW TECH: NOURISHING TOMORROW

GREEN THINKING  
New Trends

New ways to make looking after your garden even easier and more sustainable.

MANAGE YOUR  
DRIP IRRIGATION SYSTEM  
WITH A SMART TIMER

01

## AN ECO-FRIENDLY GARDEN

Do you dream of a garden in full bloom, without wasting water and energy? With Claber, you can have the best of both worlds. Our systems allow you to calibrate every last drop of water, with sensors that stop watering if it's raining and a range of timers that are fully solar powered.

**With myAquaSolar, you can program sustainable irrigation programmes from your smartphone (from page 96).**



COMBINE PLANTS  
IN DIFFERENT COLOURS  
AND HEIGHTS TO CREATE MOVEMENT

02

## SO MUCH BEAUTY IN A SMALL SPACE

It just takes a splash of creativity to transform even the tiniest of balconies into a relaxing, luxuriant green oasis. By choosing the right plants and making the most of vertical space, you can create your own happy place, even in the heart of a bustling metropolis.

**Looking for a practical hose for your terrace? Choose Twiddy (page 80)**



# 03

## SHOOTS OF INNOVATION

Technology, nature and design – this synergy can redefine the way we live. If you're surrounded by limitless greenery, innovative solutions can make watering not only easier and more efficient but also more sustainable, whether for drip irrigation or underground systems in a small garden.

**Go to our website [claber.com](http://claber.com) to keep up with the latest news.**



USE GRASS AND HEDGING TO DEFINE YOUR SPACES AND GIVE YOUR GARDEN CHARACTER.



Sustainability: at Claber, sustainability is more than just a slogan - it's what inspires us; it's the end goal that guides us in everything we do.

We're part of the change, being responsible, designing products and taking concrete action. We're committed to the cause and we believe in what we do, and the results show we're making the right choices. We care about the environment, about people, and about doing things well.



LET'S FOLLOW NATURE'S LEAD AND USE ITS RESOURCES IN THE BEST WAY WE CAN

Plastic has many great qualities but is it always the only option? We use only certified raw materials and opt for recyclable material where possible, without compromising on the durability and strength of our products.

We have redesigned the packaging for our products, replacing plastic parts with more sustainable FSC® cardboard and rethinking the shapes and sizes. Where we need the window to be see-through, we use cellulose, so our packaging is 100% recyclable.

This smart development puts our products in the best light, as well being ultra-practical. We take our lead from the best teacher, Mother Nature, and her perfect regeneration mechanisms.

A BREATH OF FRESH AIR,  
TAKING RESPONSIBLE ACTION

# DRESS CODE? GREEN

More sustainable packaging  
for all Claber products

## MORE SUSTAINABLE PACKAGING, THAT LOOKS BETTER TOO

This was the perfect opportunity to overhaul our graphic design too, giving it a practical, contemporary feel. Intuitive images and multimedia links make our products easy to assemble and use. Fresh new graphics make the products stand out on the shelf.



## WHAT DOES FSC® MEAN?

The FSC® logo stands for the Forest Stewardship Council® and is used to identify wood and paper sourced from sustainably managed forests, safeguarding wildlife and plant life, and respecting the social, economic and ecological needs of the generations of today and tomorrow.

# TAKING PLEASURE IN THE SIMPLE THINGS

Claber wants to impress even with the simplest of everyday products.

The quality of the product build, their practical uses, plus many little useful details all show the close attention Claber pays when designing its products, choosing only the very best materials. It's quality that keeps renewing, quality you can appreciate day after day.



# The sprayer bringing high quality and new features to every home and garden


Claber has paid attention to every little detail, making this multifunctional must-have product even more versatile and easier to use.

Available in 1,5- or 2-litre versions, Claber sprayers are both robust and lightweight. Its advanced ergonomics and a handy continuous jet button make it easy to hold and mean it won't tire you out, even during prolonged use.

The jet can be concentrated or nebulised and flows continuously, even when angled or flipped over.

Use with water or fertilisers and other additives for many different situations, stress free. The adjustable ring nut allows you to mark and keep your preferred solution.


The sprayer you can't do without.




360° USE



SAFETY VALVE



ADJUSTABLE  
JET



JET LOCK FOR  
CONTINUOUS  
IRRIGATION



DISCOVER THE FEATURES OF  
THE NEW SPRAYERS ON PAGE 68



## ABOVE-GROUND IRRIGATION

### WATERING IS A REAL PLEASURE

Everyone can find the right solution for their needs with Claber's extensive above-ground irrigation range.

The pistols and spray nozzles not only have a cutting-edge design, but they are also efficient and comfortable to hold, made of materials that guarantee perfect grip.

The sprinklers are lightweight yet sturdy, designed to last over time and handy to adjust.

This makes them perfect for any garden or green space. Our hoses are made of first choice materials and can be used with our extensive range of hose reels, helping you move freely around your garden.

Our automatic couplings, easy-to-install in a quick click, meet all the most common connection needs, ensuring no water waste.

Claber products not only look great, but are also handy and easy to use, making watering a relaxing and enjoyable experience.

A woman with blonde hair, wearing a yellow top and blue shorts, is watering plants in a garden. She is holding a yellow hose that is connected to a black hose reel on the ground. The garden is lush with green plants, including large agave-like plants and smaller potted plants. In the background, there is a modern house with a stone pillar and a covered patio area. The scene is set outdoors with trees and a clear sky.

Give value to the time you  
spend in the garden

Choose technology, without  
compromising on style



#### A MATTER OF STYLE

Convenience, the choice of different jet patterns, quality materials and a unique design: the wide range of spray nozzles and pistols perfectly represents Claber unmistakable Made in Italy style.



#### CONNECTING UP

Much more than just simple connectors and couplings. In addition to being the most comprehensive and universal range of products, Claber range stands out for the work that has been done on such a small yet vitally important accessory, for perfect irrigation with no wasted water.



#### WHEN EVERYTHING TURNS OUT RIGHT

Practical, lightweight and sturdy, Claber hose reels and carts have one sole purpose: making your life in the garden easier every day.



#### AN AQUATIC DELIGHT

Static, rotating, oscillating and pulsating sprinklers guarantee perfectly calibrated and even irrigation across the lawn, creating pleasant water patterns with a light rain effect.

## A PRECIOUS MOMENT

Watering your flowers, lawn or vegetable patch first thing in the morning, or as the sun goes down in the evening. The smell of wet grass. Droplets of water sliding off the leaves, forming little streams on the ground. These are invaluable everyday moments that Claber helps you treasure with its range of products.



# TAP CONNECTORS QUICK-CLICK® SYSTEM

Claber's answer to all of your tap connection needs: threaded with different diameters, smooth or with an aerator. The Quick-Click system is the easy way to connect up your watering hoses to all standard outdoor and indoor taps in one quick click! Claber's high quality materials guarantee resistant and long-lasting connectors. Universally compatible!

## 1/2" (15-21 mm) THREADED TAP CONNECTOR

**8622**



**8623**



To connect automatic Quick-Click couplings to a threaded tap by simply screwing it on. Female 1/2" (15-21 mm) thread. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8622		50	2,9 x 4,0 x 2,9	10 x 13 x 39	0,005	0,67	6000	8 000625 086221
8623		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,43	1344	8 000625 086238

## 3/4" (20-27 mm) THREADED TAP CONNECTOR

**8626**



**8627**



To connect automatic Quick-Click couplings to a threaded tap by simply screwing it on. Female 3/4" (20-27 mm) thread. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8626		100	3,5 x 4,1 x 3,5	20 x 39 x 13	0,010	1,48	7200	8 000625 086269
8627		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,46	1344	8 000625 086276

## 1" (26-34 mm) THREADED TAP CONNECTOR

**8628**



**8629**



To connect automatic Quick-Click couplings to a threaded tap by simply screwing it on. Female 1" (26-34 mm) thread. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8628		100	4,2 x 4,1 x 4,2	20 x 13 x 39	0,010	1,78	7200	8 000625 086283
8629		12	7,9 x 15,7 x 4,3	26,5 x 10 x 25	0,007	0,48	1152	8 000625 086290

## MULTI THREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)

**8591**



**8804**



To connect automatic Quick-Click couplings to a threaded tap by simply screwing it on. Female 3/4" (20 - 27 mm) thread and 1/2" (15 - 21 mm) adaptor. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8591		100	3,5 x 4,8 x 3,5	20 x 13 x 39	0,010	2,10	7200	8 000625 085910
8804		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,57	1344	8 000625 088041

### MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)

**8595****8803**

To connect automatic Quick-Click couplings to a threaded tap by simply screwing it on. Female 1" (26-34 mm) thread and 3/4" (20 - 27 mm) adaptor. It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8595		40	4,2 x 4,8 x 4,2	10 x 13 x 39	0,005	1,14	4800	8 000625 085958
8803		12	7,9 x 15,7 x 4,3	26,5 x 10 x 25	0,007	0,59	1152	8 000625 088034

### DOUBLE TAP CONNECTOR

**8598****8599**

To connect 2 hoses at the same time to the tap. Includes on/off valves and washer. Easy attachment by simply screwing on. With female 3/4" (20 - 27 mm) thread and a reducer to 1/2" (15 - 21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8598		25	11,1 x 8,3 x 5,2	20 x 13 x 39	0,010	2,32	1800	8 000625 085989
8599		8	7,9 x 24 x 5	26,5 x 10 x 25	0,007	0,93	768	8 000625 085998

### 3/4" (20 - 27 mm) MALE THREADED TWO-WAY ADAPTER

**8590****8589**

For taps with 3/4" (20 - 27 mm) thread. Includes on/off valves and washer. Enables assembly of two water timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8590		8	14,6 x 9,7 x 5,7	20 x 13 x 39	0,010	1,60	576	8 000625 085903
8589		5	7,9 x 24 x 5,3	28 x 13 x 25	0,009	1,08	360	8 000625 085897

### 4 OUTLETS DISTRIBUTOR

**8580****8581**

Converts one water tap into four outlets, each separately controlled, enabling different areas to be watered. For taps with 3/4" (20 - 27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8580		8	18,3 x 11 x 5,8	20 x 13 x 39	0,010	2,06	576	8 000625 085804
8581		5	15,4 x 24 x 5,3	28 x 19 x 25	0,013	1,55	240	8 000625 085811

### 1" F (26-34 mm) 3/4" M (20-27 mm) ADAPTER

**8509**

Converts the 3/4" (20 - 27 mm) female tap connector into a 1" (26 - 34 mm) female tap connector.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8509		12	7,9 x 15,7 x 3,0	25 x 10 x 19	0,005	0,40	1728	8 000625 085095



## CONNECTORS

Practical connectors that last.

The Quick-Click connectors offer the best in terms of practicality and durability. They are resistant to knocks, weathering and UVA rays, as well as to high pressure. The spring inside – patented by Claber – withstands up to 1.5 million clicks without breaking.

They also offer excellent compatibility as they have a standard pitch used around the world.

# QUICK-CLICK® SYSTEM JUST ONE SIMPLE CLICK

## TAP CONNECTORS

Connect up in a flash

EASY TO USE

ULTRA-RESISTANT MATERIALS

FOR ALL TAP TYPES



**3/4" (20-27 mm) QUICK-FIT TAP CONNECTOR****8587**

3/4" (20-27 mm) indoor tap connector to attach a hose with a tap in the kitchen or bathroom. For taps with 22 mm male or 24 mm female thread. Connection with quick release lever clamp mechanism. Complete with metal filter-aerator and adapter. Quick-Click coupling. Fully watertight connection.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8587		10	7,9 x 15,7 x 4,3	26,5 x 10 x 25	0,007	0,83	960	

**3/4" (20-27 mm) TAP CONNECTOR METAL****8597**

3/4" (20-27 mm) indoor tap connector. For taps with 22 mm male or 24 mm female thread. Complete with adapter. Quick-Click coupling. Fully watertight connection.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8597		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	1,15	1344	

**SMOOTH TAP CONNECTOR****8525**

For taps with round spouts (ext. Ø min. 15 max. 20 mm). With metal clip to fasten it safely to the tap. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8525		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,93	960	

**KOALA QUICK-CLICK****8583**

Square and mixer taps connector ideal to bring water from indoor taps to balconies not provided with any water outlets. Easy to install and perfectly watertight. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8583		8	7,9 x 24 x 5,2	26,5 x 10 x 25	0,007	1,05	768	

**1" - 3/4" ANGLED TAP CONNECTOR****8592**

Tap connector with joint for 1" (26-34 mm) and 3/4" (20-27 mm) threaded taps. The 180° swivel and 360° rotation prevent the hose from twisting and kinking. 3/4" M threaded outlet and Quick-Click male connector.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8592		8	7,9 x 24 x 4,2	26,5 x 10 x 25	0,007	0,81	768	

## MENDER 1/2" HOSE

**8618****8619**

Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point. For 1/2" (12,5 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8618		50	3,5 x 4,8 x 3,5	20 x 13 x 39	0,010	1,37	3600	8 000625 086184
8619		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,61	1344	8 000625 086197

## MENDER 5/8" HOSE

**8562****8563**

Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point. For 5/8" (15 mm) hoses.


code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8562		30	7 x 5,4 x 7	10 x 13 x 39	0,005	1,00	3600	8 000625 085620
8563		10	7,9 x 15,7 x 4,2	25 x 10 x 19	0,005	0,48	1440	8 000625 085637

## MENDER 3/4" HOSE

**8620****8621**

Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point. For 3/4" (19 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8620		50	7 x 6 x 7	20 x 13 x 39	0,010	2,10	3600	8 000625 086207
8621		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,64	960	8 000625 086214

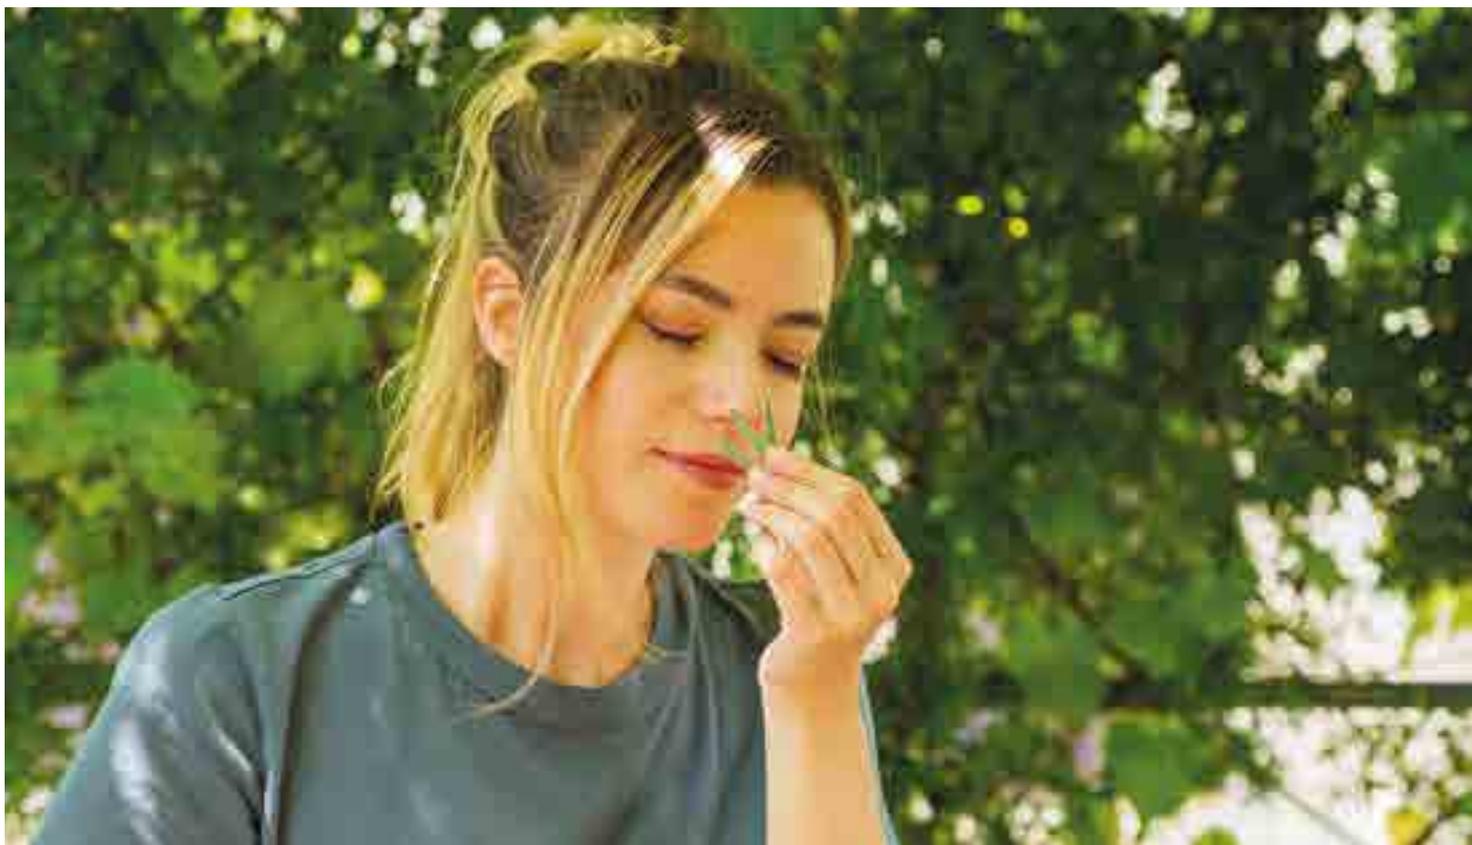

## TWO-WAY CONNECTOR

**8612****8613**

For connecting two hoses in series with Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8612		100	3 x 4,9 x 3	20 x 13 x 39	0,010	1,20	7200	8 000625 086122
8613		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,43	1344	8 000625 086139

## CONNECTOR WITH SHUT-OFF VALVE

**8611**

Connector with shut-off valve for opening/closing and regulating the water flow. Easy grip control knob. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8611		8	7,9 x 24 x 5,5	26,5 x 10 x 25	0,007	0,70	768	8 000625 086115

## THREE-WAY CONNECTOR

**8614****8615**

For deviating and splitting up water lines.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8614		40	7,3 x 6,3 x 2	10 x 13 x 39	0,005	0,85	4800	8 000625 086146
8615		12	7,9 x 15,7 x 3,8	26,5 x 10 x 25	0,006	0,48	1152	8 000625 086153

SPRINKLER CONNECTOR  
3/4" M**8636****8637**

Connects to Quick-Click system any sprinkler or accessory with 3/4" thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8636		50	3,2 x 4 x 3,2	10 x 13 x 39	0,005	0,62	6000	8 000625 086368
8637		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,42	1344	8 000625 086375

## O-RING AND WASHER SET

**8811**O-rings, 1/2" and 3/4" washers:  
- 3 pcs 1/2" washers  
- 5 pcs 3/4" washers  
- 5 pcs black OR 10,78 x 2,62

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8811		15	7,9 x 15,7 x 1,5	25 x 10 x 19	0,005	0,34	2160	8 000625 088119

**9-13 mm AUTOMATIC COUPLING**

**9025**



Automatic coupling for Ø 9-13 mm hose.  
Compatible with:  
- Spiral Kit (9034) and Spiral Kit Plus (9338)  
- Mini-set Balcony (9031) and Utility (9028)

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9025		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,49	1440	8 000625 090259

**1/2" AUTOMATIC COUPLING**

**8606**



**8607**



Automatic coupling for 1/2" hoses (Ø 12,5 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8606		50	3,5 x 5,8 x 3,5	20 x 13 x 39	0,010	1,60	3600	8 000625 086061
8607		14	7,9 x 15,7 x 3,7	26,5 x 10 x 25	0,007	0,67	1344	8 000625 086078

**5/8" AUTOMATIC COUPLING**

**8568**



**8569**



Automatic coupling for 5/8" hoses (Ø 15 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8568		50	3,8 x 6,0 x 3,8	20 x 13 x 39	0,010	1,77	3600	8 000625 085682
8569		12	7,9 x 15,7 x 4,2	26,5 x 10 x 25	0,007	0,63	1152	8 000625 085699

**3/4" AUTOMATIC COUPLING**

**8608**



**8609**



Automatic coupling for 3/4" hoses (Ø 19 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8608		50	4,2 x 6,6 x 4,2	20 x 13 x 39	0,010	2,03	3600	8 000625 086085
8609		12	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,72	1152	8 000625 086092

**COUPLING WITH SHUT-OFF VALVE**

**8601**



Automatic coupling with shut-off valve, for opening/closing and regulating the water flow.  
Easy grip control knob.  
Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8601		8	7,9 x 24 x 5,5	26,5 x 10 x 25	0,007	0,78	768	8 000625 086016

**9-13 mm AUTOMATIC COUPLING W / AQUASTOP****9026**

Automatic coupling with aquastop for Ø 9-13 mm hose.  
Compatible with:  
- Spiral Kit (9034) and Spiral Kit Plus (9338)  
- Mini-Set Balcony (9031) and Utility (9028)

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9026		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,50	1440	8 000625 090266

**1/2" AUTOMATIC COUPLING W / AQUASTOP****8602**

Automatic coupling for 1/2" (Ø 12,5 mm) hoses with aquastop valve.  
Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8602		50	3,5 x 5,8 x 3,5	20 x 13 x 39	0,010	1,71	3600	8 000625 086023
8603		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,007	0,69	1344	8 000625 086030

**5/8" AUTOMATIC COUPLING W / AQUASTOP****8566**

Automatic coupling for 5/8" (Ø 15 mm) hoses with aquastop valve.  
Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8566		50	3,8 x 6,0 x 3,8	20 x 13 x 39	0,010	1,83	3600	8 000625 085668
8567		12	7,9 x 15,7 x 4,2	26,5 x 10 x 25	0,007	0,64	1152	8 000625 085675

**3/4" AUTOMATIC COUPLING W / AQUASTOP****8604**

Automatic coupling for 3/4" (Ø 19 mm) hoses with aquastop valve.  
Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8604		50	4,2 x 6,6 x 4,2	20 x 13 x 39	0,010	2,14	3600	8 000625 086047
8605		12	7,9 x 15,7 x 4,2	26,5 x 10 x 25	0,007	0,74	1152	8 000625 086054

**TAP CONNECTOR AND 1/2" COUPLING SET****8813**

Set with tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 1/2" automatic coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8813		10	7,9 x 15,7 x 3,8	25 x 10 x 19	0,005	0,66	1440	8 000625 088133

**1/2" HOSE CONNECTION SET****8818**

For connecting two hoses in series.  
It contains: two ways connector, 1/2" automatic couplings, with and without aquastop.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8818		8	7,9 x 24 x 3,8	26,5 x 10 x 25	0,007	0,81	768	8 000625 088188

# ERGOGRIP® SYSTEM

The Ergogrip System tap connectors and automatic couplings are the result of Claber research: offering the very best when it comes to harmonious lines, ergonomics and ease of use, thanks to the rubber surface which always ensures a perfect grip. Ergogrip System meet any connection requirement for hoses with different diameters, and the standard pitch makes it compatible with tap connectors and automatic couplings used around the world. The spring inside the couplings withstands up to 1.5 million clicks without breaking, and is not damaged by water. The perfect solution for those with the most demanding needs. Ideal for use with Confort pistols.

## TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)

**8556**



**8557**



Universal tap connector with 1/2" (15-21 mm) and 3/4" (20-27 mm) thread with gaskets for a perfectly watertight seal.  
Male connector for connecting all automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8556		50	3,9 x 4,8 x 3,9	10 x 13 x 39	0,005	1,00	6000	8 000625 085569
8557		12	7,9 x 15,7 x 4,2	26,5 x 10 x 25	0,007	0,50	1152	8 000625 085576

## TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)

**8558**



**8559**



Universal tap connector with 3/4" (20-27 mm) and 1" (26-34 mm) thread with gaskets for a perfectly watertight seal.  
Male connector for connecting all automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8558		40	8 x 4,75 x 8	10 x 13 x 39	0,005	0,97	4800	8 000625 085583
8559		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,48	960	8 000625 085590

## MENDER 1/2"

**8560**



**8561**



For repairing a damaged garden hose or for connecting two coils of hose of the same diameter.  
For hoses with 1/2" (12,5 mm) diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8560		30	3,6 x 5,6 x 3,6	10 x 13 x 39	0,005	0,93	3600	8 000625 085606
8561		12	7,9 x 15,7 x 4,2	26,5 x 10 x 25	0,007	0,58	1152	8 000625 085613

## UNIVERSAL MENDER 1/2" - 5/8" - 3/4"

**8564**



**8565**



For repairing a damaged garden hose or for connecting two coils of hose, even with different diameters.  
For hoses with 1/2" - 5/8" - 3/4" diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8564		40	7,2 x 4,3 x 8	20 x 13 x 39	0,010	2,00	2880	8 000625 085644
8565		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,70	960	8 000625 085651

COUPLING 1/2" - 5/8"

8542



8543



Ergogrip automatic coupling for hoses with 1/2" (12,5mm) - 5/8" (15 mm) diameter. Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8542		50	8 x 6 x 8	20 x 13 x 39	0,010	1,82	3600	8 000625 085422
8543		12	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,66	1152	8 000625 085439

UNIVERSAL COUPLING  
1/2" - 5/8" - 3/4"

8546



8547



Ergogrip Universal automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) - 3/4" (19 mm) diameter. Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8546		40	8 x 6,8 x 8	20 x 13 x 39	0,010	1,82	2880	8 000625 085460
8547		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,96	960	8 000625 085477

COUPLING 1/2" - 5/8"  
W/AQUASTOP

8544



8545



Ergogrip automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) diameter. Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures. Features automatic water shut-off valve - inserted at the end of the hose, water flow is interrupted by disconnection of the watering accessory.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8544		25	8 x 6 x 8	10 x 13 x 39	0,005	0,95	3000	8 000625 085446
8545		12	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,68	1152	8 000625 085453

UNIVERSAL COUPLING  
1/2" - 5/8" - 3/4" W/AQUASTOP

8548



8549



Ergogrip Universal automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) - 3/4" (19 -mm) diameter. Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures. Features automatic water shut-off valve - inserted at the end of the hose, water flow is interrupted by disconnection of the watering accessory.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8548		20	8 x 6,8 x 8	10 x 13 x 39	0,005	0,98	2400	8 000625 085484
8549		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,007	0,67	960	8 000625 085491



# SPRAY NOZZLES AND PISTOLS

These Claber spray nozzles and pistols are ergonomic and practical to use, and the product line is constantly being developed. The unique design of the Pro and Plus spray nozzles means you can adjust the jet with one hand, and the ergonomic grip on the Ergo pistols is comfortable and easy to hold. The Elegant line allows you to water small green spaces consuming less water, with jets designed to prevent water or soil splashes. For those who settle for nothing but the best, there's the Confort line: a rubber grip for perfect hold, even with wet hands; a practical button for turning the water flow on or off using your finger; and a valve at the back for adjusting the flow rate. A rubber-coated cap and ring nut are also included, and there are models available in metal for the utmost sturdiness.

## ELEGANT LINE

Practical is stylish



## CONFORT PISTOLS

Top-class ergonomics



CHROME-PLATED METAL

RUBBER RING NUT

ADJUSTABLE FLOW RATE

OPEN/CLOSE BUTTON

PERFECT GRIP



## PRECISION CONFORT

**9561**



Spray pistol with anatomical rubber grip and convenient front on-off flow button. Knob at rear adjusts strength of water jet.

Cap with rubber lining for protection against impact.

Water flow can be adjusted as required, from completely closed (jet) to completely open (fan spray).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9561		3	18 x 24,5 x 4	25 x 10 x 19	0,005	0,75	432	8 000625 095612

## METAL - JET CONFORT

**9567**



Spray pistol with resistant, inalterable chrome metal components, anatomical rubber grip and convenient front on-off flow mechanism.

Metal knob at rear adjusts strength of water jet.

Pistol body is rubber lined for protection against impact.

Water flow can be adjusted as required, from completely closed (jet) to completely open (fan spray).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9567		3	17,7 x 24 x 4,5	25 x 10 x 19	0,005	0,82	432	8 000625 095674

## BALCONY CONFORT

**9565**



Shower pistol with aerator, anatomical rubber grip and convenient front on-off flow button. Knob at rear adjusts strength of water jet.

Rubber lined lock nut for protection against impact, for easy opening, inspection and cleaning of pistol. The aerator (also removable for easy cleaning) assures a gentle jet of water mixed with bubbles, ideal for watering potted plants.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9565		3	17 x 24,5 x 6,4	28 x 13 x 25	0,009	0,91	216	8 000625 095650

## MULTI - JET CONFORT

**9563**



Multifunction pistol with anatomical rubber grip and convenient front on-off flow button. Knob at rear adjusts strength of water jet.

Rubber lined lock nut for protection against impact, for easy opening, inspection and cleaning of pistol.

Rotate the nut for four different patterns: shower, jet, fan spray and mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9563		3	17 x 24,5 x 6,4	28 x 13 x 25	0,009	0,90	216	8 000625 095636



## SPRAY PISTOL

**8966**



**8756**



Spray pistol with lever adjustment of water flow and blocking device for desired jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8966		16	10 x 16 x 2	20 x 13 x 39	0,010	1,75	1152	8 000625 089666
8756		5	14 x 21,5 x 3,5	25 x 10 x 19	0,005	0,61	720	8 000625 087563

## ERGO SPRAY PISTOL

**8538**



**8539**



Spray pistol with practical ergonomic grip.  
Water flow adjustment lever.  
Dual pattern: from closed to open (jet or fan spray) and lock of required jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8538		15	15,5 x 14,2 x 4	20 x 13 x 39	0,010	2,16	1080	8 000625 085385
8539		10	15,5 x 20,5 x 4	28 x 13 x 25	0,009	1,50	720	8 000625 085392

## STARTER SET 1/2"

**8551**



Containing:  
- tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm),  
- 1/2" automatic couplings with and without aquastop,  
- Ergo spray pistol, with two spray patterns, jet or fan spray.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8551		6	16 x 24 x 5	28 x 19 x 25	0,013	1,70	288	8 000625 085514

ERGO SHOWER PISTOL

8541



Spray pistol with practical ergonomic grip.  
Shower jet open and fine spray.  
Water flow adjustment lever.  
Jet lock device, stainless steel perforated disk.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8541		4	17,5 x 21 x 6	25 x 10 x 19	0,005	0,74	576	8 000625 085415

GARDEN SPRAY PISTOL

9373



The multifunction Garden spray pistol allows to water the garden with a wider range of flows: from jet to soft fan, wise, gentle mist, shower spray, soaker. Selector device and lock for required jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9373		5	12 x 18 x 7	28 x 13 x 25	0,009	0,90	360	8 000625 093731

ERGO-GARDEN SPRAY PISTOL

9391



Multi-Jet spray pistol with practical ergonomic grip. Rotate the pistol head for four different patterns: from jet to soft fan wise, gentle soaker, shower and aerator spray (jet mixed with air bubbles). Very useful for watering potted plants. Selector device and lock for required jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9391		8	15,5 x 21 x 7,85	28 x 13 x 25	0,009	1,60	576	8 000625 093915

FAN SPRAY

8917



Fine, soft, gentle spray.  
Non slip handle grip with regulating valve on handle.  
Rustproof metal shower head plate.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8917		4	7,9 x 24 x 6	28 x 13 x 25	0,009	0,48	288	8 000625 089178

LONG FAN SPRAY

8922



Fine, soft, gentle spray, non slip handle grip with regulating valve on handle. Rustproof metal shower head plate. With aluminium long reach handle (60 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8922		2	16 x 69 x 6	77 x 10 x 20	0,012	0,74	96	8 000625 089222

## ELEGANT DUAL JET PISTOL

9081



Lightweight and compact pistol with dual jet: concentrated or fan spray. Ideal both for watering plants and for cleaning tasks. Ergonomic grip. Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9081		4	15 x 19,5 x 3	25 x 10 x 19	0,005	0,50	576	8 000625 090815

## ELEGANT MULTIFUNCTION NOZZLE 5 JETS

9089




Lightweight and compact multifunction spray nozzle. Turn the head for 5 different patterns: shower, jet, mist, cone and flat (+ 1 OFF). Quick-Click connection.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9089		6	7,9 x 15,7 x 7,5	25 x 10 x 19	0,005	0,50	864	8 000625 090891

## ELEGANT MULTIFUNCTION PISTOL

9083



Lightweight and compact multifunction pistol with aerator. Ergonomic grip. Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings. Turn the pistol head to get 4 different patterns: shower, jet, aerated, mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9083		4	16 x 20 x 6	25 x 10 x 19	0,005	0,60	576	8 000625 090839

## ELEGANT MULTIFUNCTION PISTOL 5 JETS

9088





Lightweight, compact multifunction pistol. Ergonomic grip. Handy front-mounted push-button for controlling and shutting off the water flow. 2 flow settings. Turn the pistol head for 5 different patterns: shower, jet, mist, cone and flat.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9088		4	15,5 x 20 x 6	25 x 10 x 19	0,005	0,55	576	8 000625 090884

## ELEGANT TELESCOPIC MULTIFUNCTION LANCE

9086



Multifunction spray lance with telescopic rod. Ergonomic horizontal grip with shallow-angled outlet. Rustproof aluminium telescopic long reach handle. Length: 70 - 105 cm. Handy front-mounted push-button mechanism for controlling and shutting off the water flow. 2 flow settings. Swivel spray head with 4 different patterns: shower, jet, aerated, mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9086		2	12 x 68,5 x 6	77 x 10 x 20	0,015	1,07	96	8 000625 090860

JET SPRAY NOZZLE

**8616**



**8617**



Spray nozzle with adjustable flow pattern, from jet to wide cone spray.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8616		50	3,45 x 11,7 x 3,45	20 x 13 x 39	0,010	1,80	3600	8 000625 086160
8617		8	7,9 x 24 x 3,6	26,5 x 10 x 25	0,007	0,51	768	8 000625 086177

NOZZLE AND COUPLING SET

**8800**



Set with jet spray nozzle and 1/2" automatic coupling with aquastop.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8800		10	7,9 x 24 x 4,5	28 x 13 x 25	0,013	0,96	480	8 000625 088003

STARTER SET

**8802 - Ø 1/2"**



**8827 - Ø 3/4"**



8802 contains: tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 1/2" automatic couplings with and without aquastop, jet spray nozzle.

8827 contains: tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 3/4" automatic couplings with and without aquastop, jet spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8802		8	8,5 x 24 x 4,5	28 x 19 x 25	0,013	1,30	384	8 000625 088027
8827		8	8,5 x 24 x 4,5	28 x 19 x 25	0,013	1,45	384	8 000625 088270

PRO SPRAY NOZZLE

**8534**



**8535**



Nozzle with adjustable pattern: from jet to wide cone spray, by rotating the ergonomic cap of the nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8534		15	4 x 17,5 x 4	10 x 13 x 39	0,005	1,21	1800	8 000625 085347
8535		5	7,9 x 24 x 3,7	25 x 10 x 19	0,005	0,53	720	8 000625 085354

PLUS SPRAY NOZZLE

**8536**



**8537**



Nozzle with adjustable pattern: jet to wide cone spray. Water flow regulation by turning the knob valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8536		15	4 x 17,9 x 4	10 x 13 x 39	0,005	1,32	1800	8 000625 085361
8537		5	7,9 x 24 x 4,2	25 x 10 x 19	0,005	0,56	720	8 000625 085378

# AQUAMASTER

The main feature of the new range of Aquamaster connectors and accessories is their distinctive large diameter. Designed for 3/4" and 1" hoses, they ensure that more water can pass through, supporting high pressures. Ideal for professional applications such as agriculture and construction, the Aquamaster range is often the best solution in the garden, too: from its use with suction pumps to hoses of a longer length. It offers a high flow rate and a tight seal, thanks to the Safety Lock rapid coupling technology.



## AQUAMASTER

High flow rate and tight seal

CREATED FOR  
LARGE DIAMETER HOSES

HIGH FLOW RATE  
TESTED UP TO 10 BARS

INNOVATIVE SAFETY LOCK  
TECHNOLOGY

TIGHT SEAL  
AND EASY COUPLING



**1" - 3/4" MAX-FLOW  
TAP CONNECTOR****9641**

Multi-threaded tap connector to attach a line with Max-Flow couplings to the tap. It is complete of washer. Female 1" (26 - 34 mm) thread and 3/4" (20 - 27 mm) adaptor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9641		8	7,9 x 15,7 x 4,2	25 x 10 x 19	0,005	0,43	1152	8 000625 09641 1

**1"1/4 - 1" MAX-FLOW  
TAP CONNECTOR****9655**

Multi-threaded tap connector to attach a line with Max-Flow couplings to the tap. Complete with washer. Female 1" 1/4 (33-42 mm) thread and 1" (26-34 mm) adaptor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9655		6	7,9 x 15,7 x 5,8	25 x 10 x 19	0,005	0,48	864	8 000625 09655 8

**3/4" M THREADED  
MAX-FLOW ADAPTOR****9642**

Threaded connector for fitting any accessory with a F 3/4" (20-27 mm) thread to the Max-Flow system.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9642		10	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,36	1140	8 000625 09642 8

**1" M THREADED  
MAX-FLOW ADAPTOR****9654**

Threaded connector for fitting any accessory with a F 1" (26-34 mm) thread to the Max-Flow system.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9654		10	7,9 x 15,7 x 3,6	25 x 10 x 19	0,005	0,44	1440	8 000625 09654 1



**2-WAY MAX-FLOW CONNECTOR****9643**

Connector for joining together in series two hoses with Max-Flow couplings installed on the ends.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9643		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,41	1140	

**2-WAY CONNECTOR MAX-FLOW TO STANDARD****9644**

Connector for joining together in series two hoses with a Max-Flow coupling and a Quick-Click automatic coupling installed respectively on the ends.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9644		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,37	1140	

**3-WAY MAX-FLOW CONNECTOR****9645**

Three-way connector splitting the irrigation line and directing the water to two different points. Connect three lengths of hose with Max-Flow couplings on the ends.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9645		10	7,9 x 15,7 x 2,6	25 x 10 x 19	0,005	0,61	1140	

**3-WAY CONNECTOR MAX-FLOW TO STANDARD****9646**

Three-way connector splitting the irrigation line and directing the water to two different points. Connect one length of hose with a Max-Flow coupling to two lengths of hose with Quick-Click automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9646		10	7,9 x 15,7 x 2,6	25 x 10 x 19	0,005	0,46	1140	

**MAX-FLOW O-RING AND WASHERS SET****9657**

Spare o-rings, 1" and 3/4" washers for products in the Max-Flow range.

- It includes:
- 3 Max-Flow O-rings,
  - 2 standard O-rings,
  - 1 x 1" (26-34 mm) washer,
  - 1 x 3/4" (20-27 mm) washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9657		10	7,9 x 15,7 x 1,0	25 x 10 x 19	0,005	0,16	1440	

**3/4" MAX-FLOW COUPLING****9647**

Max-Flow coupling for 3/4" (19 mm) hoses.  
A perfectly watertight connection and seal with Safety Lock.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9647		8	7,9 x 15,7 x 2,6	25 x 10 x 19	0,005	0,58	1152	

**1" MAX-FLOW COUPLING****9650**

Max-Flow coupling for 1" (25 mm) hoses.  
A perfectly watertight connection and seal with Safety Lock.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9650		6	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,55	864	

**3/4" MAX-FLOW MENDER****9648**

A mender to save a damaged hose: cut the hose at the point where the leak is and use it to join the two lengths together. For 3/4" (19 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9648		8	7,9 x 15,7 x 4,3	25 x 10 x 19	0,005	0,57	1152	

**3/4" - 1" MAX-FLOW MENDER****9649**

A mender for joining together two hoses, one with a diameter of 3/4" (19 mm) and one 1" (25 mm), without needing any other accessories.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9649		6	7,9 x 15,7 x 5,3	25 x 10 x 19	0,005	0,57	864	

**1" MAX-FLOW MENDER****9651**

A mender to save a damaged hose: cut the hose at the point where the leak is and use it to join the two lengths together. For 1" (25 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9651		6	7,9 x 15,7 x 5,3	25 x 10 x 19	0,005	0,65	864	

**MAX-FLOW ADJUSTABLE NOZZLE**

**9652**



Nozzle with adjustable pattern, from jet to wide cone spray. For use with Max-Flow couplings.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
9652		6	7,9 x 24 x 4,2	28 x 13 x 25	0,009	0,70	432	8 000625 096527

**MAX-FLOW STARTER KIT 3/4" (19 mm)**

**9656**



Max-Flow accessories kit for 3/4" (19 mm) hose. The kit includes: 1" (26-34 mm) tap connector with 1" - 3/4" (20-27 mm) adapter, 3/4" (19 mm) couplings and spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
9656		5	15,4 x 24 x 4,5	28 x 19 x 25	0,013	1,30	240	8 000625 096565

<b>CODE</b>		<b>8609</b>	<b>9647</b>
<b>DESCRIPTION</b>		<b>3/4" AUTOMATIC COUPLING</b>	<b>3/4" MAX FLOW COUPLING</b>
<b>Flow rate (l/min)</b>	1 bar	36	75
	2 bar	57	107
	3 bar	73	112
	4 bar	85	125


<b>CODE</b>		<b>8617</b>	<b>9652</b>
<b>DESCRIPTION</b>		<b>JET SPRAY NOZZLE</b>	<b>MAX FLOW ADJUSTABLE NOZZLE</b>
<b>Pattern</b>			
<b>Flow rate (l/min)</b>	1 bar	7	8
	2 bar	8	13
	3 bar	9	15
	4 bar	11	19



COMPACT AND FUNCTIONAL, IT ALLOWS YOU TO EASILY ADJUST THE JET ACCORDING TO USAGE REQUIREMENTS.

MASTER PRO NOZZLE

9658



Multijet spray nozzle ensuring a high volume of water.  
Rustproof metal shower head plate.  
Turn the head for 3 different patterns: jet, shower, mist.  
For use with Max-Flow couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
9658		3	15,4 x 24 x 9	28 x 19 x 25	0,013	1,12	144



THREE DIFFERENT JETS  
FOR ALL USES:  
SHOWER, MIST AND JET.



# METAL-JET

This comprehensive range offers the best in quality, made from chrome-plated brass, with lots of details that really make a difference. Brass guarantees high resistance and durability and the chrome-plating preserves the shine of the products over time, avoiding oxidation. Claber's Metal-Jet range is composed of a variety of products – tap connectors, automatic couplings, connectors, flow diverters, spray nozzles and pistols – all with Quick-Click couplings, making them compatible with plastic automatic couplings too. Metal-Jet connectors also have 6 internal spheres to guarantee automatic connection and a perfect seal. The screw collar with an exclusive Claber design profile distinguishes the product and improves the grip. The adjustable multipurpose pistols combine robust metal parts with an ergonomic plastic grip, helping you to select the best jet for all of your gardening needs.



**MULTIPURPOSE PISTOL**  
new style in the garden

## 1/2" METAL OUTDOOR TAP

**9624**



Chrome-plated brass outdoor tap with 1/2" M (15-21 mm) inlet. Adjustment lever with rubber grip for easy hold even with wet hands. 3/4" M (20-27 mm) threaded outlet with removable Quick-Click fitting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
9624		5	14,5 x 12 x 3	22,5 x 15,5 x 13,3	0,005	1,45	500

## 1/2" METAL OUTDOOR TAP WITH DOUBLE OUTLET

**9625**



Chrome-plated brass outdoor tap with 1/2" M (15-21 mm) inlet. Adjustment lever with rubber grip for easy hold even with wet hands. 3/4" M (20-27 mm) threaded outlet with removable Quick-Click fitting. Features a second outlet with 3/4" (20-27 mm) thread and independent adjustment knob for using a second line.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
9625		5	16 x 12 x 5,3	22,5 x 15,5 x 13,3	0,005	2,14	500



**3/4" M (20-27 mm) THREADED  
ADJUSTABLE TWO-WAY ADAPTER****9601**

Adjustable two-way adapter, 3/4" (20-27 mm) thread, in chrome-plated brass.  
Secure fit on taps with 3/4" (20-27 mm) thread.  
Independent water flow adjustment on the two lines.  
Used to install two electronic timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9601		4	14,5 x 12 x 5	22,5 x 15,5 x 13,3	0,005	1,97	400	8 000625 096015

**ADJUSTABLE TWO-WAY  
TAP CONNECTOR****9602**

Two-way connector in chrome-plated brass.  
Used to connect up two lines fitted with Quick-Click automatic couplings to just one water outlet.  
Independent water flow adjustment on the two lines.  
Secure fit on taps with 3/4" (20-27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9602		4	14,5 x 12 x 5	22,5 x 15,5 x 13,3	0,005	1,53	400	8 000625 096022

**1" (26-34 mm) TAP CONNECTOR  
WITH 3/4" (20-27 mm) ADAPTER****9603**

Tap connector in chrome-plated brass.  
For connecting automatic couplings to the tap.  
Female 1" (26-34 mm) thread and 3/4" (20-27 mm) adapter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9603		10	7 x 12 x 3	19,5 x 8,5 x 19,3	0,003	1,14	1440	8 000625 096039

**3/4" (20-27 mm)  
TAP CONNECTOR****9604**

Tap connector in chrome-plated brass.  
For connecting automatic couplings to the tap.  
Female 3/4" (20-27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9604		10	7 x 12 x 3,6	19 x 9,3 x 16	0,003	0,64	1800	8 000625 096046

**1/2" (15-21 mm)  
TAP CONNECTOR****9605**

Chrome-plated brass tap connector.  
For connecting automatic couplings to the tap.  
Female 1/2" (15 - 21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9605		10	7 x 12 x 2,4	19 x 8,5 x 12,8	0,002	0,54	2160	8 000625 096053

## TWO-WAY CONNECTOR

**9606**

Two-way connector in chrome-plated brass.  
Connects two hoses with automatic couplings in series.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9606		10	7 x 12 x 2	19 x 8,5 x 12,8	0,002	0,70	2160	8 000625 096060

## THREE-WAY CONNECTOR

**9607**

Three-way connector in chrome-plated brass.  
Splits the irrigation line into two different directions.  
Connects three hoses with automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9607		8	7 x 12 x 1,9	19 x 8,5 x 12,8	0,002	1,16	1728	8 000625 096077

1/2" M (15 - 21 mm)  
CONNECTOR**9608**

Chrome-plated brass connector with 1/2" (15 - 21 mm) male thread.  
For connecting any sprinkler or accessory with 1/2" female thread to the Quick-Click system at the water inlet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9608		10	7 x 12 x 2,6	19 x 8,5 x 12,8	0,002	0,55	2160	8 000625 096084

3/4" M (20 - 27 mm)  
CONNECTOR**9609**

Chrome-plated brass connector with 3/4" (20 - 27 mm) male thread.  
For connecting any sprinkler or accessory with 3/4" female thread to the Quick-Click system at the water inlet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9609		10	7 x 12 x 2,8	19 x 8,5 x 12,8	0,002	0,62	2160	8 000625 096091



**1/2"-5/8" AUTOMATIC COUPLING****9610**

Automatic coupling for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9610		8	7 x 12 x 3	19 x 9,3 x 16	0,003	0,92	1440	8 000625 096107

**1/2"-5/8" AUTOMATIC COUPLING W/STOP****9611**

Automatic coupling for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass. Provided with an automatic water stop valve. Fits onto the end of the hose. Water flow is interrupted by disconnection of the watering accessory. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9611		8	7 x 12 x 3	19,5 x 8,5 x 19,3	0,003	0,93	1440	8 000625 096114

**3/4" AUTOMATIC COUPLING****9613**

Automatic coupling for 3/4" (19 mm) diameter hoses in chrome-plated brass. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9613		8	7 x 12 x 4,5	19,5 x 8,5 x 19,3	0,003	1,15	1152	8 000625 096138

**3/4" AUTOMATIC COUPLING W/STOP****9614**

Automatic coupling for 3/4" (19 mm) diameter hoses in chrome-plated brass. Provided with an automatic water stop valve. Fits onto the end of the hose. Water flow is interrupted by disconnection of the watering accessory. Equipped with 6 internal bearings to guarantee automatic connection and perfect seal. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9614		8	7 x 12 x 4,5	19,5 x 8,5 x 19,3	0,003	1,18	1152	8 000625 096145

**1/2"-5/8" MENDER****9612**

Mender for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass. Repair a damaged hose: cut the hose at the point where the leak is and use it to join the two sections together. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.


code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9612		8	7 x 12 x 3,3	19 x 9,3 x 16	0,003	0,74	1440	8 000625 096121

**3/4" MENDER****9615**

Mender for 3/4" (19 mm) diameter hoses in chrome-plated brass. Repair a damaged hose: cut the hose at the point where the leak is and use it to join the two hose lengths together. The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9615		8	7 x 12 x 4	19,5 x 8,5 x 19,3	0,003	1,16	1152	8 000625 096152


### SPRAY NOZZLE WITH ADJUSTABLE JET

**9620**


Spray nozzle with adjustable pattern: from fully open to fully closed (mist or jet). Made from chrome-plated brass. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9620		8	14,5 x 12 x 2,8	22,5 x 13,3 x 15,5	0,005	1,20	800	8 000625 096206


### BASIC METAL PISTOL

**9619**


Chrome-plated metal spray pistol. Flow adjustment lever and exclusive device for selecting and fixing the desired jet. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9619		5	14,5 x 20 x 3,1	19 x 24,5 x 16,5	0,008	1,20	280	8 000625 096190


### BASIC METAL MULTIFUNCTION PISTOL

**9618**


Multifunction pistol in chrome-plated metal. Flow adjustment lever and lock for desired jet. Turn the ring nut for 7 different patterns (shower, jet, mist, gentle soaker, fan, flat, cone). Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9618		4	14,5 x 21,5 x 5,7	19 x 24,5 x 16,5	0,008	1,32	224	8 000625 096183


### SPRAY PISTOL

**9621**


Spray pistol in chrome-plated metal. Rubber ergonomic grip. Water flow adjustment lever and lock for desired jet. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9621		4	14,5 x 18 x 3,5	19 x 24,5 x 16,5	0,008	1,40	224	8 000625 096213

### 8 PATTERNS MULTIFUNCTION PISTOL


**9622**


Multifunction pistol in chrome-plated metal. Rubber ergonomic grip. Water flow adjustment lever and lock for desired jet. Turn the ring nut for 8 different spray patterns. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9622		4	14,5 x 21 x 6	19 x 24,5 x 16,5	0,008	1,5	224	8 000625 096220

## METAL-JET MULTIFUNCTION LANCE

**9626**



Multijet spray nozzle with chrome metal long reach handle (length: 70 cm). Rubber ergonomic grip. Rustproof metal shower head plate. Water flow adjustment lever and lock for the jet. Turn the ring nut for 4 different spray patterns: shower, jet, aerated, mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9626		2	14,5 x 7 x 76	77 x 10 x 20	0,012	1,45	96	8 000625 096268

## IMPACT METAL-JET SPIKE

**9623**



Chrome-plated metal pulsating sprinkler for 0° to 350° sector irrigation or 360° continuous rotation. Mounted on a metal spike for fixing securely into the ground. Provided with diffuser screw for uniform irrigation and deflector to lower the height of the jet if necessary. Option to connect two sprinklers in line (using the 3/4" threaded outlet). Operating pressure 1-3 bar. Maximum irrigated area 500 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1,0	255	18	8
2,0	415	23	11
3,0	500	25	16

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9623		3	14,5 x 31 x 6	32 x 11 x 18	0,006	1,20	210	8 000625 096237

COMPLETE WITH ACCESSORIES FOR EVERY TYPE OF CONNECTION AND USE, THE METAL-JET RANGE IS THE BEST CHOICE FOR THOSE LOOKING FOR DURABILITY AND STRENGTH.



# OSCILLATING SPRINKLERS

The Compact line is the ideal choice for watering your lawn, as it has an adjustable jet that simulates light rain. The elegant design of the outer casing in ABS, a sturdy turbine engine and resistant gears make this line one of Claber's most successful. Thanks to the special Aqua Control system, it could not be any easier to adjust the coverage of the area you want to water with just 2 fingers!



WIDE-REACHING, UNIFORM JET  
LIKE LIGHT RAIN



COMPACT

Precise and gentle

LIGHTWEIGHT, RESISTANT AND  
RUSTPROOF MATERIALS

TURBINE ENGINE  
FOR HIGH PERFORMANCE

COMPACT-160 PROMO

8740



Oscillating sprinkler, 14 precision punched water holes providing uniform distribution with natural rain effect. Control knob for selection of 4 main spray patterns with many intermediate steps. Irrigated area max 180 m<sup>2</sup>.

Bar	m <sup>2</sup>	m	l / min
1	78	11,0 x 7,0	8,0
2	133	14,0 x 10,0	11,0
3	165	16,0 x 11,0	13,0
4	181	16,0 x 11,0	15,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8740		4	41 x 10 x 15,5	46,2 x 17 x 26,2	0,021	1,66	140	8 000625 087402

COMPACT-12

8748



Oscillating arm in ABS, available with 12 holes, this model is supplied complete with hydraulic motor and self-lubricating nonwearing acetal resin gears. The large-diameter turbine offers high performance even at low pressure, while the watering selection device, comprising a practical click-operated selector provides 5 different water settings. A sled in aluminium sections (Ø 10 mm) ensures excellent stability and easy trailing. Irrigated area max 190 m<sup>2</sup>.

Bar	m <sup>2</sup>	m	l / min
1	98	11,5 x 8,5	9,1
2	169	14,5 x 11,5	12,4
3	192	17,5 x 11,0	14,1
4	165	16,5 x 10,0	15,7

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8748		3	32 x 8,5 x 19	20 x 33 x 30	0,019	1,86	144	8 000625 087488

COMPACT-20  
AQUA CONTROL

8753



The oscillating arm in ABS complete with the exclusive "Aqua Control" system allows to vary coverage of the irrigated area as required. Available with 20 holes and 8 adjustable nozzles (complete with knurled end for secure connection), this model is supplied complete with hydraulic motor and self-lubricating non-wearing acetal resin gears. The large-diameter turbine offers high performance even at low pressure, while the watering selection device, comprising a practical click-operated selector provides 5 different water settings. A sled in aluminium sections (Ø 10 mm) ensures excellent stability and easy trailing. Irrigated area max 320 m<sup>2</sup>.

Bar	m <sup>2</sup>	m	l / min
1	100	10,5 x 9,5	10,5
2	215	16,0 x 13,4	15,5
3	305	18,8 x 16,2	19,0
4	320	19,2 x 16,7	21,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8753		3	32 x 8,5 x 19	20 x 33 x 30	0,019	1,87	144	8 000625 087532

COMPACT-16  
SUPER METAL

8743



The oscillating aluminium arm with 16 brass nozzles guarantees regular water jet operation. The large sized sturdy ABS body houses the hydraulic motor which may be opened for inspection while the large-section aluminium elements (Ø 15 mm), which comprise the sled base, guarantee excellent stability and easy trailing. Irrigated area max 290 m<sup>2</sup>.

Bar	m <sup>2</sup>	m	l / min
1	83	10,1 x 8,2	11,8
2	202	16,4 x 12,3	18,0
3	269	19,2 x 14,0	21,5
4	290	19,9 x 14,6	25,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8743		3	43 x 9 x 22,5	25 x 45 x 30	0,034	2,48	72	8 000625 087433

# STATIC AND ROTATING SPRINKLERS

Claber static and rotating sprinklers offer you all of this: a great look, ease of use, versatile features and a vast range of solutions to meet different needs. From compact models, easy to move across the lawn, to models on spike to be firmly anchored into the ground, without damaging your grass.

Watering is always even and just like natural rainfall, even at low water pressure.



## MULTIFUNCTION SPRINKLER

**8654**


Made entirely in ABS. Special round shape allows easy dragging over lawns, between flower beds and plants. Shaped upper section for easily lifting. Flange rotates to provide 6 different patterns. Irrigated area max 64 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	36	6,0	17,5
2	64	8,0	24,7
3	64	8,0	30,3
4	64	8,0	34,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8654		3	20 x 24 x 8	25 x 26 x 23	0,015	1,30	135	8 000625 086542

## ROLLINA

**8656**


Compact, contoured design for easy movement over lawns. The new 5-blade rotor intercepts the water jets to create a fine natural rain effect. Irrigated area max 28 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	19	5,0	16,5
2	23	6,0	24,0
3	28	6,0	28,0
4	28	6,0	33,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8656		5	11 x 24 x 6,5	28 x 13 x 25	0,009	0,84	360	8 000625 086566

## TURBOSPRUZZO

**8658**


Compact, contoured design for easy movement over lawns. Stationary sprinkler produces a fine spray for watering circular areas. Irrigated area max 63 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	58	9,0	18,0
2	63	9,0	24,0
3	57	8,0	27,0
4	47	8,0	30,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8658		6	11 x 24 x 5	28 x 13 x 25	0,009	0,95	432	8 000625 086580

## TURBOSPIKE

**8660**


Stationary sprinkler on plastic spike with natural rain effect in circle pattern. Irrigated area max 40 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	30	6,0	7,8
2	30	6,0	10,7
3	40	7,0	12,9
4	40	7,0	14,8

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8660		12	7,9 x 24 x 3,8	28 x 13 x 25	0,009	0,89	864	8 000625 086603



**IDROSPRAY 2000**

**8675**



Rotating 2-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Offset nozzle jets in fan arrangement achieve a uniform spray and magnificent water games. Adjustable nozzles optimise performance also at low pressure. Covers circular areas with light rain effect. Irrigated area max 177 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	123	12,5	14,0
2	177	15,0	17,8
3	143	13,5	20,5
4	123	12,5	23,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8675		2	25,5 x 22 x 12	25 x 26 x 23	0,015	1,12	90	8 000625 086757

**AQUALUX 2000**

**8685**

**LIMITED STOCK**



Rotating 2-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Adjustable nozzles optimise performance also at low pressure. Covers circular areas with light rain effect. Irrigated area max 113 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	87	10,5	4,9
2	113	12,0	7,1
3	104	11,5	8,4
4	87	10,5	9,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8685		4	17,5 x 24 x 8,5	20 x 30 x 33	0,019	1,27	192	8 000625 086856

**IDROJET 2000**

**8694**



Rotating 3-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Adjustable nozzles optimise performance also at low pressure. Covers circular areas with light rain effect. Irrigated area max 113 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	75	9,8	7,0
2	113	12,0	9,9
3	104	11,5	11,9
4	95	10,0	13,3

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8694		4	17,5 x 24 x 8,5	20 x 30 x 33	0,019	1,31	192	8 000625 086948

**SPIKE-JET**

**8661**



Static sprinkler that can be positioned where needed using the special shaped stake, designed to guarantee maximum stability in the ground. It evenly waters circular areas. Quick-Click standard connection. Irrigated area max 54 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	28	6,0	17,5
2	44	7,5	24,7
3	53	8,0	30,3
4	54	8,5	34,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8661		5	15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,57	350	8 000625 086610

**SPRAY-JET**

**8663**



Rotating 2-arm sprinkler with adjustable nozzles. It can be positioned where needed using the special shaped stake, designed to guarantee maximum stability in the ground. Covers circular areas with light rain effect. Quick-Click standard connection. Irrigated area max 64 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	64	9,0	4,2
2	64	9,0	5,9
3	55	8,5	7,0
4	55	8,5	7,7

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8663		5	15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,73	350	8 000625 086634

**VARIO-JET**

**8662**



Multifunction static sprinkler. It features four different jets, which can be selected by turning the head: spray, blade jet, 360°, 180°. The stake has been designed to guarantee maximum stability. Quick-Click standard connection. Irrigated area max 64 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	20	5,0	5,6
2	38	7,0	8,1
3	64	9,0	9,8
4	50	8,0	11,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8662		5	15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,83	350	8 000625 086627





# PULSATING SPRINKLERS

Pulsating sprinklers are the ideal solution for watering at long distances: with the Impact line, Claber takes performance and versatility to new heights.

The head design guarantees that the jet is well distributed, with no water leakage from the sides.

The reverse mechanism means you can water a targeted area between 0° and 360°.

Alternatively, you can lift up the mechanism so that the head turns freely and waters the full circular area evenly.

The stainless-steel pin and wear-resistant bronze bushing guarantee maximum durability.

The steel tripod with an epoxy powder coating is ultra-stable and height-adjustable (tripod kit, complete with threaded tube).



## 3/4" (20-27 mm) IMPACT FEMALE HEAD

**8705**



Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation.  
3/4" (20-27 mm) female thread.  
Diffuser screw assures even water distribution.  
Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.  
Stainless steel pin and wear-resistant bronze bushing.

Bar	m <sup>2</sup>	Ø m	l / min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8705		5	15,4 x 24 x 4,8	28 x 13 x 25	0,009	0,89	360



## IMPACT ON STAKE

**8707**

Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on steady twin-point stake. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing. Irrigated area max 397 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8707		5	10,7 x 28 x 4,5	28 x 13 x 25	0,009	1,78	360	

## IMPACT PLASTIC SPIKE

**8708**

Pulsating sprinkler head providing 0° to 360° circular coverage or continuous rotation, mounted on twinpoint plastic stake. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing. Irrigated area max 397 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8708		5	16 x 7 x 39	20 x 39,5 x 19,5	0,016	1,26	240	

## IMPACT TRIPOD

**8709**

Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on steady aluminium tripod. "L" water connection at base. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing. Irrigated area max 491 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	227	17,0	9,3
2	346	21,0	11,9
3	437	23,6	14,8
4	491	25,0	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8709		4	9,7 x 38 x 6	18 x 40 x 18	0,012	1,81	280	

## IMPACT TRIPOD KIT

**8715**

Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on tripod with adjustable opening and height. "L" water connection at base. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing. Steel tripod with epoxy powder paint finish, with 3/4" (20-27 mm) threaded aluminium tube for height adjustment. Tool-free assembly, comes in practical compact package. Irrigated area max 572 m<sup>2</sup>.

Bar	m <sup>2</sup>	Ø m	l / min
1	296	19,4	9,3
2	401	22,6	11,9
3	531	26,0	14,8
4	572	27,0	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8715		2	12 x 59,5 x 8,8	60 x 26 x 10	0,016	4,27	96	

										
		8740	8748	8753	8743	8654	8656	8658	8660	
TYPE		OSCILLATING				STATIC				
SUPPORT		sled	sled	sled	sled	sled	sled	sled	stake	
MATERIALS		Aluminium > ABS <	Aluminium > ABS <	Aluminium > ABS <	Aluminium > ABS <	> ABS <	> PP <	> PP <	> PP <	
QUICK-CLICK CONNECTION		✓	✓	✓	✓	✓	✓	✓	✓	
FUNCTIONS		4	5	5	5	6	1	1	1	
WATERING PATTERNS										
										
										
										
										
										
OPERATING PRESSURE (BAR)		1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	
IRRIGATED AREA (m <sup>2</sup> )		min	78 m <sup>2</sup>	98 m <sup>2</sup>	100 m <sup>2</sup>	83 m <sup>2</sup>	36 m <sup>2</sup>	19 m <sup>2</sup>	47 m <sup>2</sup>	30 m <sup>2</sup>
		max	181 m <sup>2</sup>	192 m <sup>2</sup>	320 m <sup>2</sup>	290 m <sup>2</sup>	64 m <sup>2</sup>	28 m <sup>2</sup>	63 m <sup>2</sup>	40 m <sup>2</sup>
AREA (m)		min	11,0 x 7,0	11,5 x 8,5	10,5 x 9,5	10,1 x 8,2	6,00			
		max	16,0 x 11,0	17,5 x 11	19,2 x 16,7	19,9 x 14,6	8,00			
DIAMETER (m)		min					4,00	8,00	6,00	
		max					5,00	9,00	7,00	
FLOW RATE (l/min)		min	8,00	9,10	10,50	11,80	17,50	18,00	18,00	7,80
		max	15,00	15,70	21,00	25,00	34,00	35,00	30,00	14,80



# HOSE REELS AND CARTS

Claber offers the most comprehensive range of hose reels and carts for all of your needs in the garden or on your patio or terrace. Versatile, sturdy and easy to manoeuvre, they are also available as a kit, complete with hose, spray nozzle and accessories, with a metal structure for top performance.

## THE COMPACT SOLUTIONS

Thanks to their compact size, Claber hose reels are the ideal solution for small and medium-sized gardens and terraces.

Their unmistakable design is also multi-purpose, as they can be used on the ground or mounted on the wall.

Lightweight, stable and easy to manoeuvre, they can be assembled in a flash, without any tools.

They also come in a kit complete with hose, accessories and a spray nozzle or pistol.



### ECO 0

**8866**



Eco 0 wall hanger for 1/2" (12,5 mm) or 5/8" (15 mm) garden hose. Reinforced grooves make it extremely hard-wearing. Easy wall mounting option.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8866		8	25 x 15,1 x 16,3	47 x 27 x 18	0,022	2,42	280	

### MINI-SET UTILITY

**9028**



Compact hose reel with accessories, ready-to-use. Provided with retractable handle for ease of transport and placement. Can be wall-mounted. Easy to store away tidily with places to house the pistol, couplings and connectors. It includes: 10 metres of 9-13 mm hose, 3/4" (20-27 mm) tap connector with 1/2" (15-21 mm) reducer, 2 automatic couplings, 1 spray pistol with dual pattern (jet or fan).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9028		1	21 x 25 x 14	21 x 25 x 14	0,007	1,46	96	

### MINI-SET BALCONY

**9031**



Compact hose reel with accessories, ready-to-use. Provided with retractable handle for ease of transport and placement. Can be wall-mounted. Easy-to-store, thanks to its conveniently located recesses, designed to house couplings, tap connector and pistol. Includes: 10 metres of Ø 9-13 mm hose, 3/4" (20-27 mm) tap connector with 1/2" (15-21 mm) reducer, 2 automatic couplings, 1 multifunction pistol with aerator.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9031		1	21 x 25 x 14	21 x 25 x 14	0,007	1,51	96	

## AQUAPONY

**8887**

Compact hose reel that can be used free standing or wall mounted.  
Space-saving design.  
Complete with automatic coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8887		1	40 x 40 x 12	40 x 40 x 12	0,019	1,60	54	

## AQUAPONY KIT

**8884**

Aquapony reel with:  
- 15 m of Ø 1/2" (12,5 mm) Silver Elegant Plus hose  
- 3/4" (20-27 mm) tap connector + 1/2" (15-21 mm) reducer  
- 4 automatic couplings (one with aquastop)  
- spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8884		1	27 x 32 x 30	27 x 32 x 30	0,026	3,40	30	

## KIROS

**8921**

Removable wall-mounted hose reel in easy assembly kit without use of tools.  
Supplied complete with wall brackets (2 Pcs) and automatic coupling for hose connection.  
Compact pack dimensions.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8921		1	40 x 40 x 12	40 x 40 x 12	0,019	2,00	54	

## KIROS KIT

**8945**

Wall-mounted hose reel with:  
- 20 m of Ø 1/2" (12,5 mm) Silver Elegant Plus hose  
- 3/4" (20-27 mm) tap connector + 1/2" (15-21 mm) reducer  
- 4 automatic couplings (one with aquastop)  
- spray nozzle  
- 2 wall brackets.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8945		1	40 x 32 x 31	40 x 32 x 31	0,039	4,40	18	

## WALL BRACKETS

**8711**

For wall mounted installations of Claber hose reels.  
Includes:  
- 2 wall brackets  
- screws and nuts  
- expansion bolts  
- hose reel retainer wingnut.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8711		10	7,9 x 15,7 x 3,8	25 x 10 x 19	0,005	1,10	1440	

## SET AQUAPASS

**8974****LIMITED STOCK**

Aquapass, the original hose cassette with water thru-feed either with hose partially or totally wound up. Includes 15 m of round hose diam. 15 mm combining the performance of a traditional hose reel with that of a portable hose cassette.  
Compact high impact, lightweight housing, it is supplied with automatic Quick-Click couplings, 1,5 m extension hose, jet spray nozzle, wall bracket.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8974		1	40 x 40 x 12	40 x 40 x 12	0,019	4,50	54	

## THE ESSENTIALS

Claber's work on its carts also continues to develop, offering several benefits both in store and in the garden.

Made of sturdy plastic, these models can be easily assembled, without needing any tools.

This is thanks to the new assembly mechanism for the flanges and the reinforced drum.

The plastic handle is ergonomic and ensures a comfortable grip; a feature that has also shrunk the size of the packaging, now even more compact and easier to transport.



### ECOSEI

**8980**



Comes disassembled in a kit, for rapid, easy assembly without tools. Ergonomic plastic handle. Sturdy, lightweight rust-proof aluminium frame. Cross sections without sharp edges, with tubular strengthening structure. Reel drum turns smoothly on delrin bearings. Contoured, partly enclosed wheels for movement between even the tightest spaces. Coupling supplied for hose connection; hose holding clip included. Compact packaging to facilitate transport, storage and display in retail outlets.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8980		1	40 x 40 x 12	40 x 40 x 12	0,019	2,88	54	8 000625 089802

### ECOSEI KIT

**8981**



The kit consists in the hose cart Ecossei disassembled, packed in a carton supplied complete with:

- 20 m of 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) tap connector + reducer 1/2" (15-21 mm)
- 4 couplings (2 for preparing the extension)
- spray nozzle
- hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8981		1	40 x 60 x 13	40 x 60 x 13	0,030	5,40	32	8 000625 089819

## SILVER-AL

**8977****LIMITED STOCK**

Comes disassembled in a kit, for rapid, easy assembly without tools.  
Ergonomic plastic handle.  
Sturdy, lightweight rustproof aluminium frame.  
Cross sections without sharp edges, with tubular strengthening structure.  
Reel drum turns smoothly on delrin bearings.  
Contoured, partly enclosed wheels for movement between even the tightest spaces.  
Coupling supplied for hose connection; hose holding clip included.  
Compact packaging to facilitate transport, storage and display in retail outlets.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8977		1	40 x 40 x 12	40 x 40 x 12	0,019	2,84	54	8 000625 089772

## EXTENSION

**8962**

1,5 m Ø 1/2" (12,5 mm) extension hose with automatic Quick-Click couplings and 3/4" - 1/2" tap connector.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8962		12	19 x 38 x 2,7	39 x 12 x 39	0,02	4,20	288	8 000625 089628



## GENIUS®, NUMBER ONE FOR MEDIUM-SIZED GARDENS

Reinforced cross-bars, a special anti-twist groove and a lower centre of gravity to enhance its stability: these are the features that make Genius the ideal cart for medium-sized gardens.

Both handy and sturdy, they can be used to unwind up to 100 metres of hose, depending on the model, while still being practical to use.

The winding knob has been carefully studied to guarantee a comfortable grip and to make the hose easy to unwind and rewind.

All with the same guaranteed Claber quality.

The aluminium frame is rustproof, sturdy and quick and easy to assemble without the need of tools.



GENIUS 60

8862



Genius hose cart, ideal for medium-sized gardens.  
Comes disassembled in a kit for quick and easy assembly, without tools.  
Lightweight, sturdy, rustproof aluminium frame.  
Reinforced plastic drum, mounted on Delrin bearings, meaning it rewinds without causing friction. Easy-grip knob to make the hose handy to rewind.  
Coupling supplied for hose connection; hose holding clip included.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8862		1	39 x 48,5 x 39	39 x 48,5 x 39	0,073	3,61	12	8 000625 088621

GENIUS 100

8872



Genius hose reel cart, ideal for large gardens.  
Comes disassembled in a kit for quick and easy assembly, without tools.  
Lightweight, sturdy, rustproof aluminium frame.  
Reinforced plastic drum, mounted on Delrin bearings, meaning it rewinds without causing friction.  
Large size wheels covered in rubber giving high stability, ideal for heavier load.  
Easy-grip knob to make the hose handy to rewind.  
Coupling supplied for hose connection; hose holding clip included.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8872		1	37 x 55 x 37	37 x 55 x 37	0,075	4,39	10	8 000625 088720

KIT PRONTO 30

8864



Kit with Genius 60 hose cart, supplied complete with:  
- 30 m of Ø 1/2" (12,5 mm) Top-Black hose  
- tap connector, couplings and spray nozzle  
- 1,5 m extension hose with couplings  
- hose holding clip.  
Ready-to-use.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8864		1	39 x 48,5 x 39	39 x 48,5 x 39	0,073	8,20	12	8 000625 088645

## READY TO USE

Our top-selling carts are delivered on pallets, always ready to use: whether displayed in store on practical pallets or at home, they are preassembled and come complete with hose, spray nozzle and all the accessories you need. A solution that enhances product visibility and promotes self-service purchases.




### QUBO PRONTO AQUAVIVA 20

**8933**



Ready-to-use hose cart, equipped with a compact drum (41 cm wide) to make it easier to use in narrow spaces. The telescopic handle is easy to close away by pressing on the two side levers. Aluminium structure. Carved wheels to move easily over any surface. Supplied with:

- 20 m of Ø 1/2" (12,5 mm) Aquaviva Plus hose
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector
- hose holding clip.

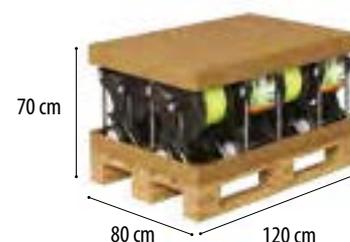

code	packaging	qty	pack size (cm)	pallet size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8933		8	41 x 86 x 40	120 x 70 x 80	0,670	45,00	8




**GENIUS COMPACT PRONTO 25**

**8858**



Ready-to-use hose cart. Stainless aluminium frame, reinforced cross bars and PP drum. Swivel knob.  
 Supplied complete with:  
 - 25 m of Ø 5/8" (15 mm) Silver Elegant Plus hose  
 - 4 automatic couplings (one with aquastop)  
 - spray nozzle  
 - tap connector  
 - hose holding clip.

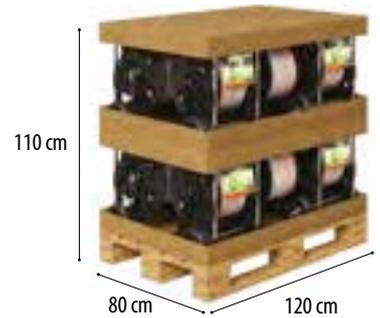


code	packaging	qty	pack size (cm)	pallet size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8858		12	40 x 46 x 37	120 x 110 x 80	1,060	85,00	12	8 000625 088584

**GENIUS COMPACT PRONTO AQUAVIVA 20**

**8985**



Ready-to-use hose cart. Stainless aluminium frame, reinforced crossbars and PP drum. Swivel knob.  
 Supplied with:  
 - 20 m of Ø 5/8" (15 mm) Aquaviva Plus hose  
 - 4 automatic couplings (one with aquastop)  
 - spray nozzle  
 - tap connector hose  
 - holding clip.

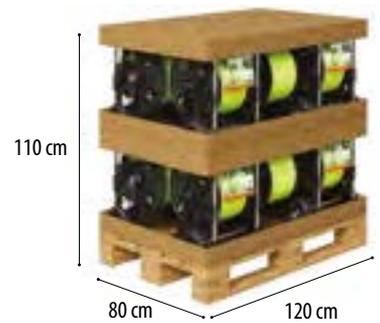


code	packaging	qty	pack size (cm)	pallet size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8985		12	40 x 46 x 37	120 x 110 x 80	1,060	75,00	12	8 000625 089857

**METAL JUNIOR PRONTO AQUAVIVA 25**

**8865**



Preassembled, ready-to-use hose cart. Aluminium structure with telescopic handle. Pivoting winding handle and semi-enclosed wheels.  
 Supplied with:  
 - 25 m of Ø 1/2" (12.5 mm) Aquaviva Plus hose  
 - 4 automatic couplings (one with aquastop)  
 - spray nozzle  
 - tap connector hose  
 - holding clip.

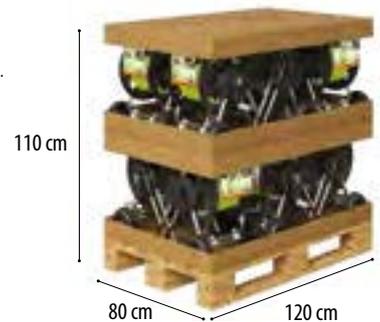

code	packaging	qty	pack size (cm)	pallet size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8865		12	40,5 x 53 x 44	120 x 110 x 80	1,150	70,00	12	8 000625 088652

# FOR THE PROS

The most high-performing Claber carts are for the most demanding customers, ideal for those looking for professional quality and handiness. The structure is made entirely of metal and the surface has been treated to make the product last over time.

The winding handle is handy and enables a smooth rewind of the hose. The drum is mounted on acetalic resin bearings, making it easier to rewind without causing friction.

The perfect compromise for a sturdy yet handy product.



## METAL 40

8890



Removable hose reel for wall mounting, comes in a kit for easy, tool-free assembly. The frame and drum are constructed entirely of metal. Epoxy resin finish helps protect the metal work from the elements over time. Supplied complete with two wall brackets, universal hose connector and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8890		1	40 x 40 x 12	40 x 40 x 12	0,019	5,18	54	8 000625 088904

## METAL 60

8891



The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment. Available in kit, easy to assemble without the use of tools. Fitted with silent-block preventing the wear of metal on metal. Large size wheels make the handling easier and guarantee stability on all type of ground surfaces. Universal coupling supplied for hose connection, hose holding clip included.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8891		1	39 x 59 x 12	59 x 39 x 12	0,028	6,80	32	8 000625 088911

## METAL GEMINI

**8894**

The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment.  
Available in kit, easy to assemble without the use of tools.  
Fitted with silent-block preventing the wear of metal on metal.  
Large size wheels make the handling easier and guarantee stability on all type of ground surfaces.  
Equipped with 2 universal couplings and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8894		1	47 x 56 x 13	47 x 56 x 13	0,034	9,20	14	

## METAL PROFY

**8895**

The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment. Available in kit, easy to assemble without the use of tools.  
Fitted with silent-block preventing the wear of metal on metal.  
Large size wheels covered in rubber giving high stability, ideal for heavier load.  
Water-thru of large diameter.  
Equipped with 2 universal couplings and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8895		1	57 x 57 x 13	57 x 57 x 13	0,039	10,20	12	

## JUMBO

**8900**

Hose cart with 4 wheels. The frame and drum are constructed entirely of metal. Resistant to the elements, thanks to its epoxy resin surface treatment.  
Metal parts coupled by way of Silent block mounts.  
Zinc coated parts.  
Drum at 90°. Large diameter wheels with anti-flat tyres.  
Supplied as kit, quick and easy to assemble.  
Equipped with 2 universal couplings and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8900		1	60 x 80 x 17	60 x 80 x 17	0,082	15,60	10	

# ROTOROLL® EVOLUTION

The Rotoroll Evolution makes watering your garden a joy, thanks to its innovative features and unmistakable Claber quality. With its practical wall mount, Rotoroll is ready to use. Free 180° rotation means the hose unwinds smoothly in any direction, to ensure maximum comfort every time. Once you are done, the hose rewinds back up quickly and tidily, with no effort at all, thanks to the automatic SLOW REWIND mechanism. High-quality materials that are resistant to knocks and exposure to sunlight make Rotoroll Evolution the perfect hose reel for any garden, large or small, as well as for your patio.



FREE ROTATION



SLOW REWIND SYSTEM



SECURITY LOCK

HIGH-QUALITY MATERIALS

OPTIONAL FLOOR STAND



INFO



ROTOROLL EVOLUTION 10 m

8692



A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 10 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding. It is made from materials resistant to impact and sunlight, to ensure maximum durability. The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use. This avoids the hose being bent or obstructed. It is equipped with an extension hose to connect it to a tap (1,5 m), a 3/4" (20-27 mm) connector, automatic couplings and a spray nozzle. It comes complete with a wall support, screws and plugs for wall mounting.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	barcode
8692		1	41 x 38,5 x 24	41 x 38,5 x 24	0,038	6,00	20	8 000625 086924

ROTOROLL EVOLUTION 20 m

8696



A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 20 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding. It is made from materials resistant to impact and sunlight, to ensure maximum durability. The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use. This avoids the hose being bent or obstructed. It is equipped with an extension hose to connect it to a tap (1,5 m length), a 3/4" (20-27 mm) tap connector, automatic couplings and a spray nozzle. It comes complete with a wall support, screws and plugs for wall mounting.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	barcode
8696		1	49 x 38 x 26,5	49 x 38 x 26,5	0,050	9,50	12	8 000625 086962

ROTOROLL EVOLUTION 30 m

8697



A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 30 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding. It is made from materials resistant to impact and sunlight, to ensure maximum durability. The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use. This avoids the hose being bent or obstructed. It is equipped with an extension hose to connect up to a tap (2 m length), a 3/4" (20-27 mm) tap connector, automatic couplings and a spray nozzle. It comes complete with a wall support, screws and plugs for wall mounting.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	barcode
8697		1	57,5 x 52 x 28	57,5 x 52 x 28	0,080	14,00	12	8 000625 086979

ROTOROLL EVOLUTION FLOOR STAND

8690



Floor base for the Rotoroll Evolution 10, 20 m and 30 m automatic hose reels. This allows the hose reel to be positioned anywhere in the garden, provided it is located near a tap. It can swivel 360° and be easily fixed to a concrete slab using the screws and plugs supplied.

Size: 23 x 15,5 x 23 cm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	barcode
8690		1	24,2 x 15 x 24,2	24,2 x 15 x 24,2	0,01	1,00	69	8 000625 086900

HOSE REELS AND CARTS									
ITEM	9031	9028	8887	8884	8921	8945	8980	8981	8977
FEATURES	THE COMPACT SOLUTIONS						THE ESSENTIALS		
Wheels							✓	✓	✓
Aluminium structure			✓	✓	✓	✓	✓	✓	✓
Plastic structure	✓	✓	✓	✓	✓	✓	✓	✓	✓
Steel structure									
Stainless steel structure									
Surface treatment with epoxy resin									
Assembled and ready to use	✓	✓		✓		✓			
Kit	✓	✓		✓		✓		✓	
Telescopic handle									
No tools assembly			✓		✓		✓	✓	✓
Automatic rewind									
TECHNICAL SPECIFICATIONS									
Weight (kg)	1,5	1,33	1,42	3,42	1,8	4,26	2,88	5,4	2,84
Size (cm)									
Width	21	21	42	42	42	42	48,2	48,2	47,2
Height	24	24	28,6	28,6	30	30	87	87	84,5
Depth	14	14	25,5	25,5	40	40	39	39	38
Hose reel capacity									
9 - 13 mm	10 m	10 m							
1/2" - 12,5 mm			20 m	15 m	40 m	20 m	60 m	20 m	60 m
5/8" - 15 mm					35 m		50 m		50 m
3/4" - 19 mm									
IDEAL FOR									
Small gardens	✓	✓	✓	✓					
Medium-sized gardens					✓	✓	✓	✓	✓
Large gardens									
ACCESSORIES SUPPLIED									
Hose	✓	✓		✓		✓		✓	
Automatic couplings	2	2	1	3+1 stop	1	3+1 stop	1	3+1 stop	1
Spray nozzle/Pistol	1	1		1		1		1	
Tap connector	1	1		1		1		1	
Hose rack							1	1	1
Universal couplings									
Extension									
Wall brackets					2	2			

8862	8872	8864	8933	8858	8985	8865	8890	8891	8894	8895	8900	8692	8696	8697	8974
THE N.1 FOR MEDIUM-SIZED GARDENS			READY TO USE				FOR THE PROS					ROTOROLL EVOLUTION AQUAPASS			
✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓				
✓	✓	✓	✓	✓	✓	✓									
✓	✓	✓	✓	✓	✓	✓						✓	✓	✓	✓
							✓	✓	✓	✓	✓				
							✓	✓	✓	✓	✓				
			✓	✓	✓	✓						✓	✓	✓	✓
		✓	✓	✓	✓	✓						✓	✓	✓	✓
			✓		✓	✓									
✓	✓	✓					✓	✓	✓	✓	✓				
												✓	✓	✓	
3,14	3,73	7,4	4,45	5	5	5,05	4,1	5,2	7,2	8,2	17,4		8,5	12,6	4,15
47,4	58,3	47,4	41	45	45	49,3	51,5	52,7	64,3	72	61,5	21	25	26	34,4
73,5	80	73,5	54	73,8	73,8	81,6	47,8	88,3	86,5	89,6	100	34	60	66	37
44	48	44	40	44	44	54	38	43	46	46,6	88,3	37	39	46	11,5
60 m	100 m	30 m	20 m			25 m	85 m	85 m	130 m	165 m	165 m	10 m	20 m	30 m	15 m
50 m	90 m			25 m	20 m		60 m	60 m	100 m	130 m	130 m				
							40 m	40 m	60 m	75 m	75 m				
												✓			
✓		✓	✓	✓	✓	✓	✓						✓		
	✓							✓	✓	✓	✓			✓	
		✓	✓	✓	✓	✓						✓	✓	✓	✓
1	1	3+1 stop	3+1 stop	3+1 stop	3+1 stop	3+1 stop						1	1	1	1
		1	1	1	1	1						1	1	1	1
		1	1	1	1	1					1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1					
							1	1	2	2	2				
		1,5 m 1/2"										1,5 m	1,5 m	2 m	1,5 m
							2					1	1	1	1

# LIFE OUTDOORS

Claber has really thought of everything, suggesting practical solutions for gardens and living spaces, like the Malibù Shower, which can be placed on any surface thanks to its stable tripod base, to offer a relaxing moment in the midst of the greenery or at poolside.

For collecting everything in the garden, as well as at home or in the office, there's Carry Cart, the solid, extremely light multi-purpose cart that can be taken everywhere with ease thanks to the sculpted tread of its wheels, ideal for heavy loads too, used with robust Claber bags in recyclable material. Lastly, not forgetting Claber's cleaning solutions: from pistols with dynamic jets for cleaning walls and paving stones to brushes with soft bristles for washing cars and bicycles safely and gently.



## CARRY CART ECO

**8934**



The original cleaning up cart for the disposal of outdoor refuse (leaves, grass cutting, paper, etc.). Rust-resistant aluminium frame, it can be left outdoor as it is completely weatherproof. Push-in connecting system of the innovative hivestrustructure side upright. The ring supporting the disposal bag can be adjusted to different heights thanks to the lever clamps, overcoming any problem due to the size of the collecting bags. Resin clamps fit the bag to the ring.  
New snap-fit polypropylene support base is able to withstand heavy loads.  
Aluminium wheel-axle inserted into proper slots.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8934		1	44 x 59 x 16	44 x 59 x 16	0,041	3,16	16	8 000625 089345

## SET OF 10 CLABER BAGS

**8904**



Bags made of strong recyclable material, three times thicker than the average garden bag. Ideal for all gardening tasks. Large holding capacity (110 l) and excellent resistance to thorns and pruned branches. Pack of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8904		10	30 x 39 x 3	30 x 21 x 40	0,002	12	240	8 000625 089048

## BAG CLAMPS

**8713**



Claber resin clamps for fitting bags on Carry-Carts.  
4 Pcs. Blister pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8713		10	7,9 x 15,7 x 3,8	25 x 10 x 19	0,005	0,45	1440	8 000625 087136

## WIPPY CAR

**8774**

Flexible wash brush for all washing tasks.  
Long lasting synthetic bristles.  
Water flow control valve incorporated in handle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8774		4	7,5 x 43 x 5,5	27 x 47 x 12	0,015	1,52	196	


## WASHING PISTOL

**8757**

With frontal regulated flow.  
Fan-wise opening for washing action.  
Single trigger locking mechanism on/off regulator.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8757		12	15,5 x 21,5 x 3,5	28 x 13 x 25	0,009	1,41	864	

## MALIBÙ

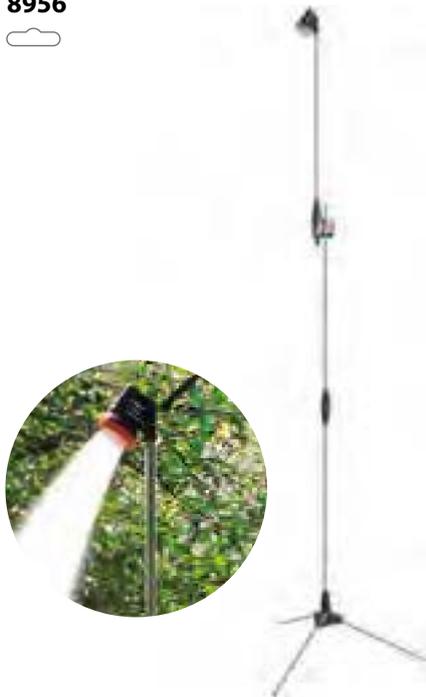**8956**

Disassembled shower for the garden, camping and balcony in rust-resistant aluminium.  
Lever clamp for height adjustment, regulating water flow valve.  
Tripod suitable for any hard surface.  
Height 200 cm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8956		3	14,5 x 75 x 6	77 x 16 x 20	0,023	2,90	90



## WIPPY AUTO

**8843**

Handy and easy to use for every washing need.  
Round profile of the bristles: utmost convenience and easy cleaning.  
Sturdy brush head with synthetic bristles ensuring a good cleaning result and resistance to hot water.  
Complete with 120 cm long reach handle in anodised aluminium and water flow regulating valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8843		2	26 x 84 x 7	90 x 27 x 14	0,034	1,92	36



# SPRAYERS

Practical, multi-purpose and easy to manoeuvre: Claber's new pressure sprayers are ideal for potted plants and small green spaces in your garden. With a 1,5 or 2 litres capacity, a firm grip and an adjustable jet span, they can be used to distribute water, fertilisers or anti-parasite liquids with precision. Claber sprayers are designed to work at any angle and a practical see-through marker allows you to monitor the liquid level at all times.


They're long-lasting and comfy to use, also thanks to the high-quality components like the Viton® seals.



## SPRAYERS

Take care of your greenery, stress free

360° USE

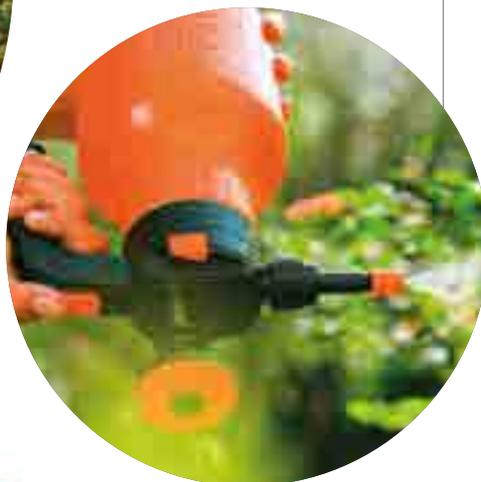

INDICATION OF WHAT'S INSIDE

ADJUSTABLE JET RANGE

CONTINUOUS FLOW

EASY-TO-SEE LIQUID LEVEL



NEW FOR 2025

SPRAYER 1,5 L

8080



1.5-litre pressure sprayer. Compatible with water and other solutions such as detergents, fertilisers, fungicides, antiparasitics and weedkillers. Convenient see-through strip to check the level of the liquid inside. Aluminium shaft and piston with adjustable ring nut to mark down the solution contained in the tank. Rear button for continuous nebulisation with locking mechanism. Safety valve for pressure above 3 bar and vent button to release the pressure and make it easier to open the container. Adjustable nozzle. Use the full 360° thanks to a handy filter with weight. Chemical-resistant Viton® seals for maximum durability.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8080		6	26 x 30 x 12,5	51 x 38 x 31	0,06	4,00	72	

NEW FOR 2025

SPRAYER 2 L

8081



2-litre pressure sprayer. Compatible with water and other solutions such as detergents, fertilisers, fungicides, antiparasitics and weedkillers. Convenient see-through strip to check the level of the liquid inside. Aluminium shaft and piston with adjustable ring nut to mark down the solution contained in the tank. Rear button for continuous nebulisation with locking mechanism. Safety valve for pressure above 3 bar and vent button to release the pressure and make it easier to open the container. Adjustable nozzle. Use the full 360° thanks to a handy filter with weight. Chemical-resistant Viton® seals for maximum durability.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8081		6	26 x 32 x 13,5	55 x 40 x 33	0,072	4,40	72	

ABOVE-GROUND



# HAPPY FRESH EVOLUTION

Happy Fresh is the practical kit designed by Claber to cool down hot summer days on the patio, in the garden or on the terrace. The efficiency of the micro-mist nozzles means that the microscopic drops of water released into the atmosphere can reduce the temperature by up to 6 degrees, creating a feeling of well-being on even the hottest days. Quick to assemble, the Happy Fresh Kit can easily be hooked onto parasols, gazebos and sunshades; you just need a tap and an extension hose to enjoy only the pleasant side of summer. The system can be integrated with Aquauno Mist, the new versatile battery-powered Claber timer that allows you to set the frequency and run time of the nebulisation periods.

**HAPPY FRESH KIT**  
Only the best of summer

UP TO 6 DEGREES LESS,  
THANKS TO THE EFFICIENCY  
OF THE MICRO-MIST NOZZLES



EASY ATTACHMENT  
AND ANTI-DRIP BRASS NOZZLES



OPTIONAL TIMER

**AQUAUNO MIST**

**8496**



Automatic one-way timer, ideal for cyclical automation of both Happy Fresh cooling systems and watering systems on the terrace and in the garden. Easy programming with 2 rotary knobs: one to set the frequency and the other to select the run time. 27 programs can be selected for drip systems (yellow sector, run time from 2 to 90 mins every 12, 24 or 48 hours), 24 possible combinations for Happy Fresh systems (blue quadrant, run time from 5 to 45 seconds, every 1, 3, 5, 10 mins). Option of 5 min test function. Equipped with washable filter. Works with 9V alkaline battery. Electronic part perfectly sealed. Operating pressure from 0,5 to 10 bars. 100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8496		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,05	280	

**HAPPY FRESH EVOLUTION KIT 7,5 m**

**90751**



Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 7,5 m of hose, 6 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols and connected to the tap (using an extension hose fitting that is not provided). The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The system can be automatically activated by adding the Aquauno Mist timer (not included). Operating pressure: 3-6 bar.

**CONTAINS**

Hose	7,5 m	Spring clips to fasten hose	11
In-line micro-mist nozzles	5	3/4" thread male connector	1
End-of-line micro-mist nozzle	1	Connector for hose with washable filter	1
Clips + screws to fasten hose	11 + 11		

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90751		4	30 x 30,5 x 4,4	39 x 19 x 39	0,029	3,00	96	

**HAPPY FRESH EVOLUTION KIT 12 m**

**90752**



Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 12 m of hose, 9 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols and connected to the tap (using an extension hose fitting that is not provided). The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The system can be automatically activated by adding the Aquauno Mist timer (not included). Operating pressure: 3-6 bar.

**CONTAINS**

Hose	12 m	Spring clips to fasten hose	17
In-line micro-mist nozzles	8	3/4" thread male connector	1
End-of-line micro-mist nozzle	1	Connector for hose with washable filter	1
Clips + screws to fasten hose	17 + 17		

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90752		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	0,97	108	

**HAPPY FRESH EVOLUTION KIT 12 m W/TIMER**

**90753**



Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 12 m of hose, 9 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols. The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The kit also includes the battery-powered Aquauno Mist timer, which automatically turns on the cooling system at regular intervals. Operating pressure: 3-6 bar.

**CONTAINS**

Hose	12 m	Spring clips to fasten hose	17
In-line micro-mist nozzles	8	3/4" thread male connector	1
End-of-line micro-mist nozzle	1	Connector for hose with washable filter	1
Clips + screws to fasten hose	17 + 17	Aquauno Mist timer	1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90753		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,40	108	



# HOSES

Claber has always been at the forefront for its above-ground irrigation hoses.

These hoses are made of carefully selected, non-recycled materials with no heavy metals or phthalates, safeguarding your health and the environment. Handiness, endurance and great aesthetics are guaranteed: Claber can make a difference.

## TOP BLACK®

Kink-resistant hose with a special braided reinforcement that guarantees excellent stability at high water pressure; algae-resistant and UV-resistant.


The Top-Black hoses are 100% safe, as they contain no heavy metals or phthalates.



## FLEXYFORT® GREEN

Knitted hose with special kink-resistant layer: it does not twist even at high pressure. Algae-resistant and UV-resistant.

The Flexyfort Green hoses are 100% safe, as they contain no heavy metals or phthalates.



## SILVER ELEGANT® PLUS

Ultra-light braided hose that is easy to handle, flexible, algae-resistant and UV-resistant.

The Silver Elegant Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



## AQUAVIVA® PLUS

Easy-to-handle hose with algae-resistant, robust and flexible lining.

The Aquaviva Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



TOP-BLACK Ø 1/2"  
(12,5 mm) m 15

**9037**



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9037		1	Ø 28 x 10	Ø 28 x 10	0,008	1,97	99	8 000625 090372

TOP-BLACK Ø 1/2"  
(12,5 mm) m 25

**9064**



9064		1	Ø 38 x 10	Ø 38 x 10	0,025	3,20	66	8 000625 090648
------	--	---	-----------	-----------	-------	------	----	-----------------

9036		1	Ø 38 x 18	Ø 38 x 18	0,025	6,50	36	8 000625 090365
------	--	---	-----------	-----------	-------	------	----	-----------------

TOP-BLACK Ø 1/2"  
(12,5 mm) m 50

**9036**



TOP-BLACK Ø 5/8"  
(15 mm) m 15

**9040**



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9040		1	Ø 38 x 9	Ø 38 x 9	0,013	2,30	78	8 000625 090402

TOP-BLACK Ø 5/8"  
(15 mm) m 25

**9065**



9065		1	Ø 38 x 11	Ø 38 x 11	0,016	3,80	60	8 000625 090655
------	--	---	-----------	-----------	-------	------	----	-----------------

9043		1	Ø 38 x 20	Ø 38 x 20	0,028	7,65	30	8 000625 090433
------	--	---	-----------	-----------	-------	------	----	-----------------

TOP-BLACK Ø 5/8"  
(15 mm) m 50

**9043**



TOP-BLACK Ø 3/4"  
(19 mm) m 25

**9048**



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9048		1	Ø 43 x 17,5	Ø 43 x 17,5	0,032	6,92	36	8 000625 090488

TOP-BLACK Ø 3/4"  
(19 mm) m 50

**9045**



9045		1	Ø 45 x 25	Ø 45 x 25	0,050	13,50	16	8 000625 090457
------	--	---	-----------	-----------	-------	-------	----	-----------------



**FLEXYFORT GREEN Ø 1/2"**  
 (12,5 mm) m 15
**9131**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9131		1	Ø 28 x 10	Ø 28 x 10	0,008	2,23	99	8 000625 091317

**FLEXYFORT GREEN Ø 1/2"**  
 (12,5 mm) m 25
**9141**

9141		1	Ø 38 x 10	Ø 38 x 10	0,015	3,60	66	8 000625 091416
------	---	---	-----------	-----------	-------	------	----	-----------------

9133		1	Ø 37 x 16	Ø 38 x 16	0,023	7,00	36	8 000625 091331
------	---	---	-----------	-----------	-------	------	----	-----------------

**FLEXYFORT GREEN Ø 1/2"**  
 (12,5 mm) m 50
**9133**

9131



9141



9133

**FLEXYFORT GREEN Ø 5/8"**  
 (15 mm) m 15
**9142**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9142		1	Ø 38 x 8	Ø 38 x 9	0,013	2,67	72	8 000625 091423

**FLEXYFORT GREEN Ø 5/8"**  
 (15 mm) m 25
**9145**

9145		1	Ø 38 x 11	Ø 38 x 11	0,016	4,41	60	8 000625 091454
------	---	---	-----------	-----------	-------	------	----	-----------------

9136		1	Ø 39 x 19	Ø 39 x 19	0,030	8,80	30	8 000625 091362
------	---	---	-----------	-----------	-------	------	----	-----------------

**FLEXYFORT GREEN Ø 5/8"**  
 (15 mm) m 50
**9136**

9142



9145



9136

**FLEXYFORT GREEN Ø 3/4"**  
 (19 mm) m 25
**9149**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9149		1	Ø 40 x 15	Ø 40 x 15	0,024	6,10	36	8 000625 091492

**FLEXYFORT GREEN Ø 3/4"**  
 (19 mm) m 50
**9138**

9138		1	Ø 43 x 23	Ø 43 x 23	0,004	12,57	16	8 000625 091386
------	---	---	-----------	-----------	-------	-------	----	-----------------



9149



9138

**SILVER ELEGANT PLUS Ø 1/2"**  
 (12,5 mm) m 15
**9123**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9123		1	Ø 28 x 10	Ø 28 x 10	0,008	1,78	99	8 000625 091232

**SILVER ELEGANT PLUS Ø 1/2"**  
 (12,5 mm) m 25
**9124**

9124		1	Ø 38 x 9,5	Ø 38 x 9,5	0,016	3,35	66	8 000625 091249
------	--	---	------------	------------	-------	------	----	-----------------



9123

9124

**SILVER ELEGANT PLUS Ø 5/8"**  
 (15 mm) m 15
**9125**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9125		1	Ø 38 x 8	Ø 38 x 8	0,011	2,26	78	8 000625 091256

**SILVER ELEGANT PLUS Ø 5/8"**  
 (15 mm) m 25
**9126**

9126		1	Ø 39 x 9	Ø 39 x 9	0,014	3,76	60	8 000625 091263
------	--	---	----------	----------	-------	------	----	-----------------

9127		1	Ø 39 x 18	Ø 39 x 18	0,027	7,25	30	8 000625 091270
------	--	---	-----------	-----------	-------	------	----	-----------------

**SILVER ELEGANT PLUS Ø 5/8"**  
 (15 mm) m 50
**9127**

9125

9126

9127

**SILVER ELEGANT PLUS Ø 3/4"**  
 (19 mm) m 25
**9128**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9128		1	Ø 38 x 17	Ø 38 x 17	0,025	6,07	36	8 000625 091287

**SILVER ELEGANT PLUS Ø 3/4"**  
 (19 mm) m 50
**9129**

9129		1	Ø 45 x 25	Ø 45 x 25	0,050	11,00	16	8 000625 091294
------	--	---	-----------	-----------	-------	-------	----	-----------------



9128

9129

### 1/2" (12,5 mm) SILVER ELEGANT PLUS HOSE KIT 15 m

**8845**


Hose kit complete with:

- 15 m of 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) multithread tap connector and 1/2" (15-21 mm) reducer
- 2 automatic couplings (one with aquastop)
- spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8845		1	35 x 34 x 8	35 x 34 x 8	0,010	1,95	60



### 5/8" (15 mm) SILVER ELEGANT PLUS HOSE KIT 15 m

**8856**


Hose kit complete with:

- 15 m of 5/8" (15 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) multithread tap connector and 1/2" (15-21 mm) reducer
- 2 automatic couplings (one with aquastop)
- spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8856		1	37,5 x 38 x 10	37,5 x 38 x 10	0,014	2,34	60



AQUAVIVA PLUS Ø 1/2"  
(12,5 mm) m 10**9120**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9120		1	Ø 28 x 7	Ø 28 x 7	0,005	0,99	143	8 000625 091201

AQUAVIVA PLUS Ø 1/2"  
(12,5 mm) m 15**9003**

9003		1	Ø 28 x 10	Ø 28 x 10	0,008	1,46	99	8 000625 090037
------	--	---	-----------	-----------	-------	------	----	-----------------

9004		1	Ø 38 x 11	Ø 38 x 11	0,016	2,25	66	8 000625 090044
------	--	---	-----------	-----------	-------	------	----	-----------------

AQUAVIVA PLUS Ø 1/2"  
(12,5 mm) m 25**9004**AQUAVIVA PLUS Ø 5/8"  
(15 mm) m 15**9005**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9005		1	Ø 38 x 9	Ø 38 x 9	0,013	1,80	78	8 000625 090057

AQUAVIVA PLUS Ø 5/8"  
(15 mm) m 25**9006**

9006		1	Ø 38 x 9	Ø 38 x 9	0,013	3,10	60	8 000625 090068
------	--	---	----------	----------	-------	------	----	-----------------

AQUAVIVA PLUS Ø 3/4"  
(19 mm) m 25**9008**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9008		1	Ø 38 x 16	Ø 38 x 16	0,023	4,90	36	8 000625 090082



BRAIDED AND KNITTED HOSES													
	ITEM	9037	9064	9036	9040	9065	9043	9045	9048	9131	9141	9133	9142
DIAMETER (")	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	1/2"	1/2"	1/2"	5/8"	5/8"
DIAMETER (mm)	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm	15 mm	19 mm	19 mm	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm
LENGTH (m)	15	25	50	15	25	50	25	50	15	25	50	15	25
PRODUCT LINE	TOP - BLACK								FLEXYFORT GREEN				
QUALITY	★★★★★								★★★★★				
WARRANTY	25 years								25 years				
TYPE	braided								knitted				
HOSE CROSS-SECTION IMAGE													
NO. LAYERS	3								3				
MATERIAL	PVC + Polyester								PVC + Polyester				
MAX PRESSURE	12	12	12	12	12	12	8	8	8	8	8	8	8
BURSTING PRESSURE	36	36	36	36	36	36	25	25	24	24	24	24	24
TEMPERATURE °C	-15° / +50								-20° / +60°				
NO PHTHALATES	✓								✓				
ALGAE-RESISTANT	✓								✓				
KINK-RESISTANT	✓								✓				
ANTI UV	✓								✓				

															
															
<b>9136</b>	<b>9149</b>	<b>9138</b>	<b>9123</b>	<b>9124</b>	<b>9125</b>	<b>9126</b>	<b>9127</b>	<b>9128</b>	<b>9129</b>	<b>9120</b>	<b>9003</b>	<b>9004</b>	<b>9005</b>	<b>9006</b>	<b>9008</b>
5/8"	3/4"	3/4"	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	1/2"	1/2"	1/2"	5/8"	5/8"	3/4"
15 mm	19 mm	19 mm	12,5 mm	12,5 mm	15 mm	15 mm	15 mm	19 mm	19 mm	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm	19 mm
50	25	50	15	25	15	25	50	25	50	10	15	25	15	25	25
<b>FLEXYFORT GREEN</b>			<b>SILVER ELEGANT PLUS</b>							<b>AQUAVIVA PLUS</b>					
★★★★★			★★★★							★★★					
25 years			20 years							10 years					
knitted			braided							braided					
															
3			4							5					
PVC + Polyester			PVC + Polyester							PVC + Polyester					
8	7	7	10	10	10	10	10	8	8	8	8	8	8	8	7
24	21	21	30	30	30	30	30	24	24	24	24	24	24	24	21
- 20° / + 60°			- 15° / + 50°							- 10° / + 40°					
✓			✓							✓					
✓			✓							✓					
✓															
✓			✓												

# TWIDDY

Practical, light, convenient... we could go on, but it's when you turn on the tap that Twiddy outdoes itself. Because Claber's new extendable hose doubles in length when water passes through it, to reach any point you want. It can be handled without ever getting twisted, thanks to the special technology and the anti-kink fittings.

Pleasant to the touch, Twiddy exceeds all expectations.



 **2X EXTENDABLE**

TWIDDY

Exceeding all expectations

ULTRALIGHT  
AND COMPACT

QUICK-CLICK  
FITTINGS WITH  
ANTI-KIK END



COMES WITH MULTIJET  
SPRAY NOZZLE





### TWIDDY 15 m

**9336**



Extendable hose with accessories. As water flows through the hose, it extends to up to twice its length at the ideal pressure of 3 bar - max. length 15 m). After use it shrinks back by itself to its original size.  
 Super-light, it's ideal for non-intensive uses like camping, sailing, gardens and terraces.  
 Quick-Click fittings with anti-kink flexible end for easy use in any direction.  
 Resistant to UV rays. Multifunction spray nozzle featuring 5 patterns: shower, jet, mist, cone and flat (+ 1 OFF).  
 Working temperature from -10 to + 50°C.  
 Max. working pressure: 5 bar.

code	pack	q.ty	(cm) dim. pack	(cm) dim. box	(m <sup>3</sup> ) volume	weight (kg)	pcs/pallet	
9336		6	27 x 19 x 13	57 x 20,5 x 17	0,046	6,75	96	8 000625 093366

### TWIDDY 25 m

**9337**



Extendable hose with accessories. As water flows through the hose, it extends to up to twice its length at the ideal pressure of 3 bar - max. length 25 m). After use it shrinks back by itself to its original size.  
 Super-light, it's ideal for non-intensive uses like camping, sailing, gardens and terraces.  
 Quick-Click fittings with anti-kink flexible end for easy use in any direction.  
 Resistant to UV rays. Multifunction spray nozzle featuring 5 patterns: shower, jet, mist, cone and flat (+ 1 OFF).  
 Working temperature from -10 to + 50°C.  
 Max. working pressure: 5 bar.

code	pack	q.ty	(cm) dim. pack	(cm) dim. box	(m <sup>3</sup> ) volume	weight (kg)	pcs/pallet	
9337		4	27 x 19 x 18	57 x 20,5 x 17	0,046	6,61	64	8 000625 093373

# SPIRAL KIT

Spiral hose, tap connector and multifunction head or spray nozzle with adjustable jet: all in one package! Keep it close to hand whether in your garden, out on the terrace, at your holiday home, in your campervan or on your boat.

All Spiral Kit components have been designed to work perfectly and last.

The hose undergoes a special treatment during production, meaning it always returns to its compact spiral shape, making it easy to store away tidily in its wall bracket.



FLEXIBLE  
IRRIGATION

Spiral Kit is a simple, practical and efficient solution for all gardening and washing tasks taking up minimal space.




		<b>9034 10 m</b>	<b>9338 15 m</b>
Flow rate (l/min)	2 bar	9,9 l/min	8,70 l/min
	3 bar	12,30 l/min	11,00 l/min
	4 bar	14,50 l/min	12,90 l/min
	6 bar	18,45 l/min	16,60 l/min



## SPIRAL KIT BASIC 10 m

9034



Spiral hose ideal for use on balconies, terraces, small gardens, boats and camp sites. Thanks to the quality of the materials and the spiral memory, the hose will always regain its original shape after use. The kit comprises: 10 metres spiral hose, 3/4" (20-27 mm) threaded tap connector, automatic coupling, automatic coupling with Aquastop, spray nozzle, wall bracket with screws and plugs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9034		6	10,5 x 59 x 10,5	39 x 59 x 26	0,060	6,20	72	8 000625 090341

## SPIRAL KIT PLUS 15 m

9338



Spiral hose ideal for use on balconies, terraces, small gardens, boats and camp sites. Thanks to the quality of the materials and the spiral memory, the hose will always regain its original shape after use. The kit comprises 15 metres spiral hose, 3/4" (20-27 mm) threaded tap connector, automatic coupling, automatic coupling with Aquastop, multifunction spray lance with 4 different jets (shower, concentrated, aerated, mist + 1 position OFF), wall bracket with screws and plugs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9338		3	23 x 53 x 11,5	39 x 59 x 26	0,060	4,60	36	8 000625 093380

LIMITED STOCK

## 9-13 mm COUPLING

9025



Automatic coupling for Ø 9-13 mm hose.  
Compatible with:  
- Spiral Kit (9034) and Spiral Kit Plus (9338)  
- Mini-set Balcony (9031) and Utility (9028)

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9025		10	7,9 x 15,7 x 4,5	25 x 10 x 19	0,005	0,50	1440	8 000625 090259

## 9-13 mm COUPLING W/AQUASTOP

9026



Automatic coupling with aquastop for Ø 9-13 mm hose.  
Compatible with:  
- Spiral Kit (9034) and Spiral Kit Plus (9338)  
- Mini-Set Balcony (9031) and Utility (9028)

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
9026		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,60	1440	8 000625 090268

A woman with blonde hair, wearing a light-colored cardigan over a yellow top, is smiling and holding a yellow flower. She is standing in a lush garden with various plants, including purple flowers and green foliage. The background is filled with dense green trees and a bright sky.

# DRIP IRRIGATION

## THE MICRO-IRRIGATION EVOLUTION

Claber has designed a series of impressive solutions to help you set up an easy, made-to-measure micro-irrigation system.


Claber has taken inspiration from nature and natural rainfall, to create irrigation systems which provide each plant with the right amount of water, without wasting a drop.

The core of a micro-irrigation system is the wide range of battery-operated timers, flexible and easy to use like no other, distributing the amount of water each plant needs, when it needs it.

Claber has covered all the requirements, with independent systems that can run for long periods without needing any taps or an electrical power supply – a real revolution that sets you free! Whether on your balcony or terrace, in your garden or vegetable patch, even at home or at work, Claber is always the right choice.

Never compromise on your passion for green.

Water your plants in the best possible way.

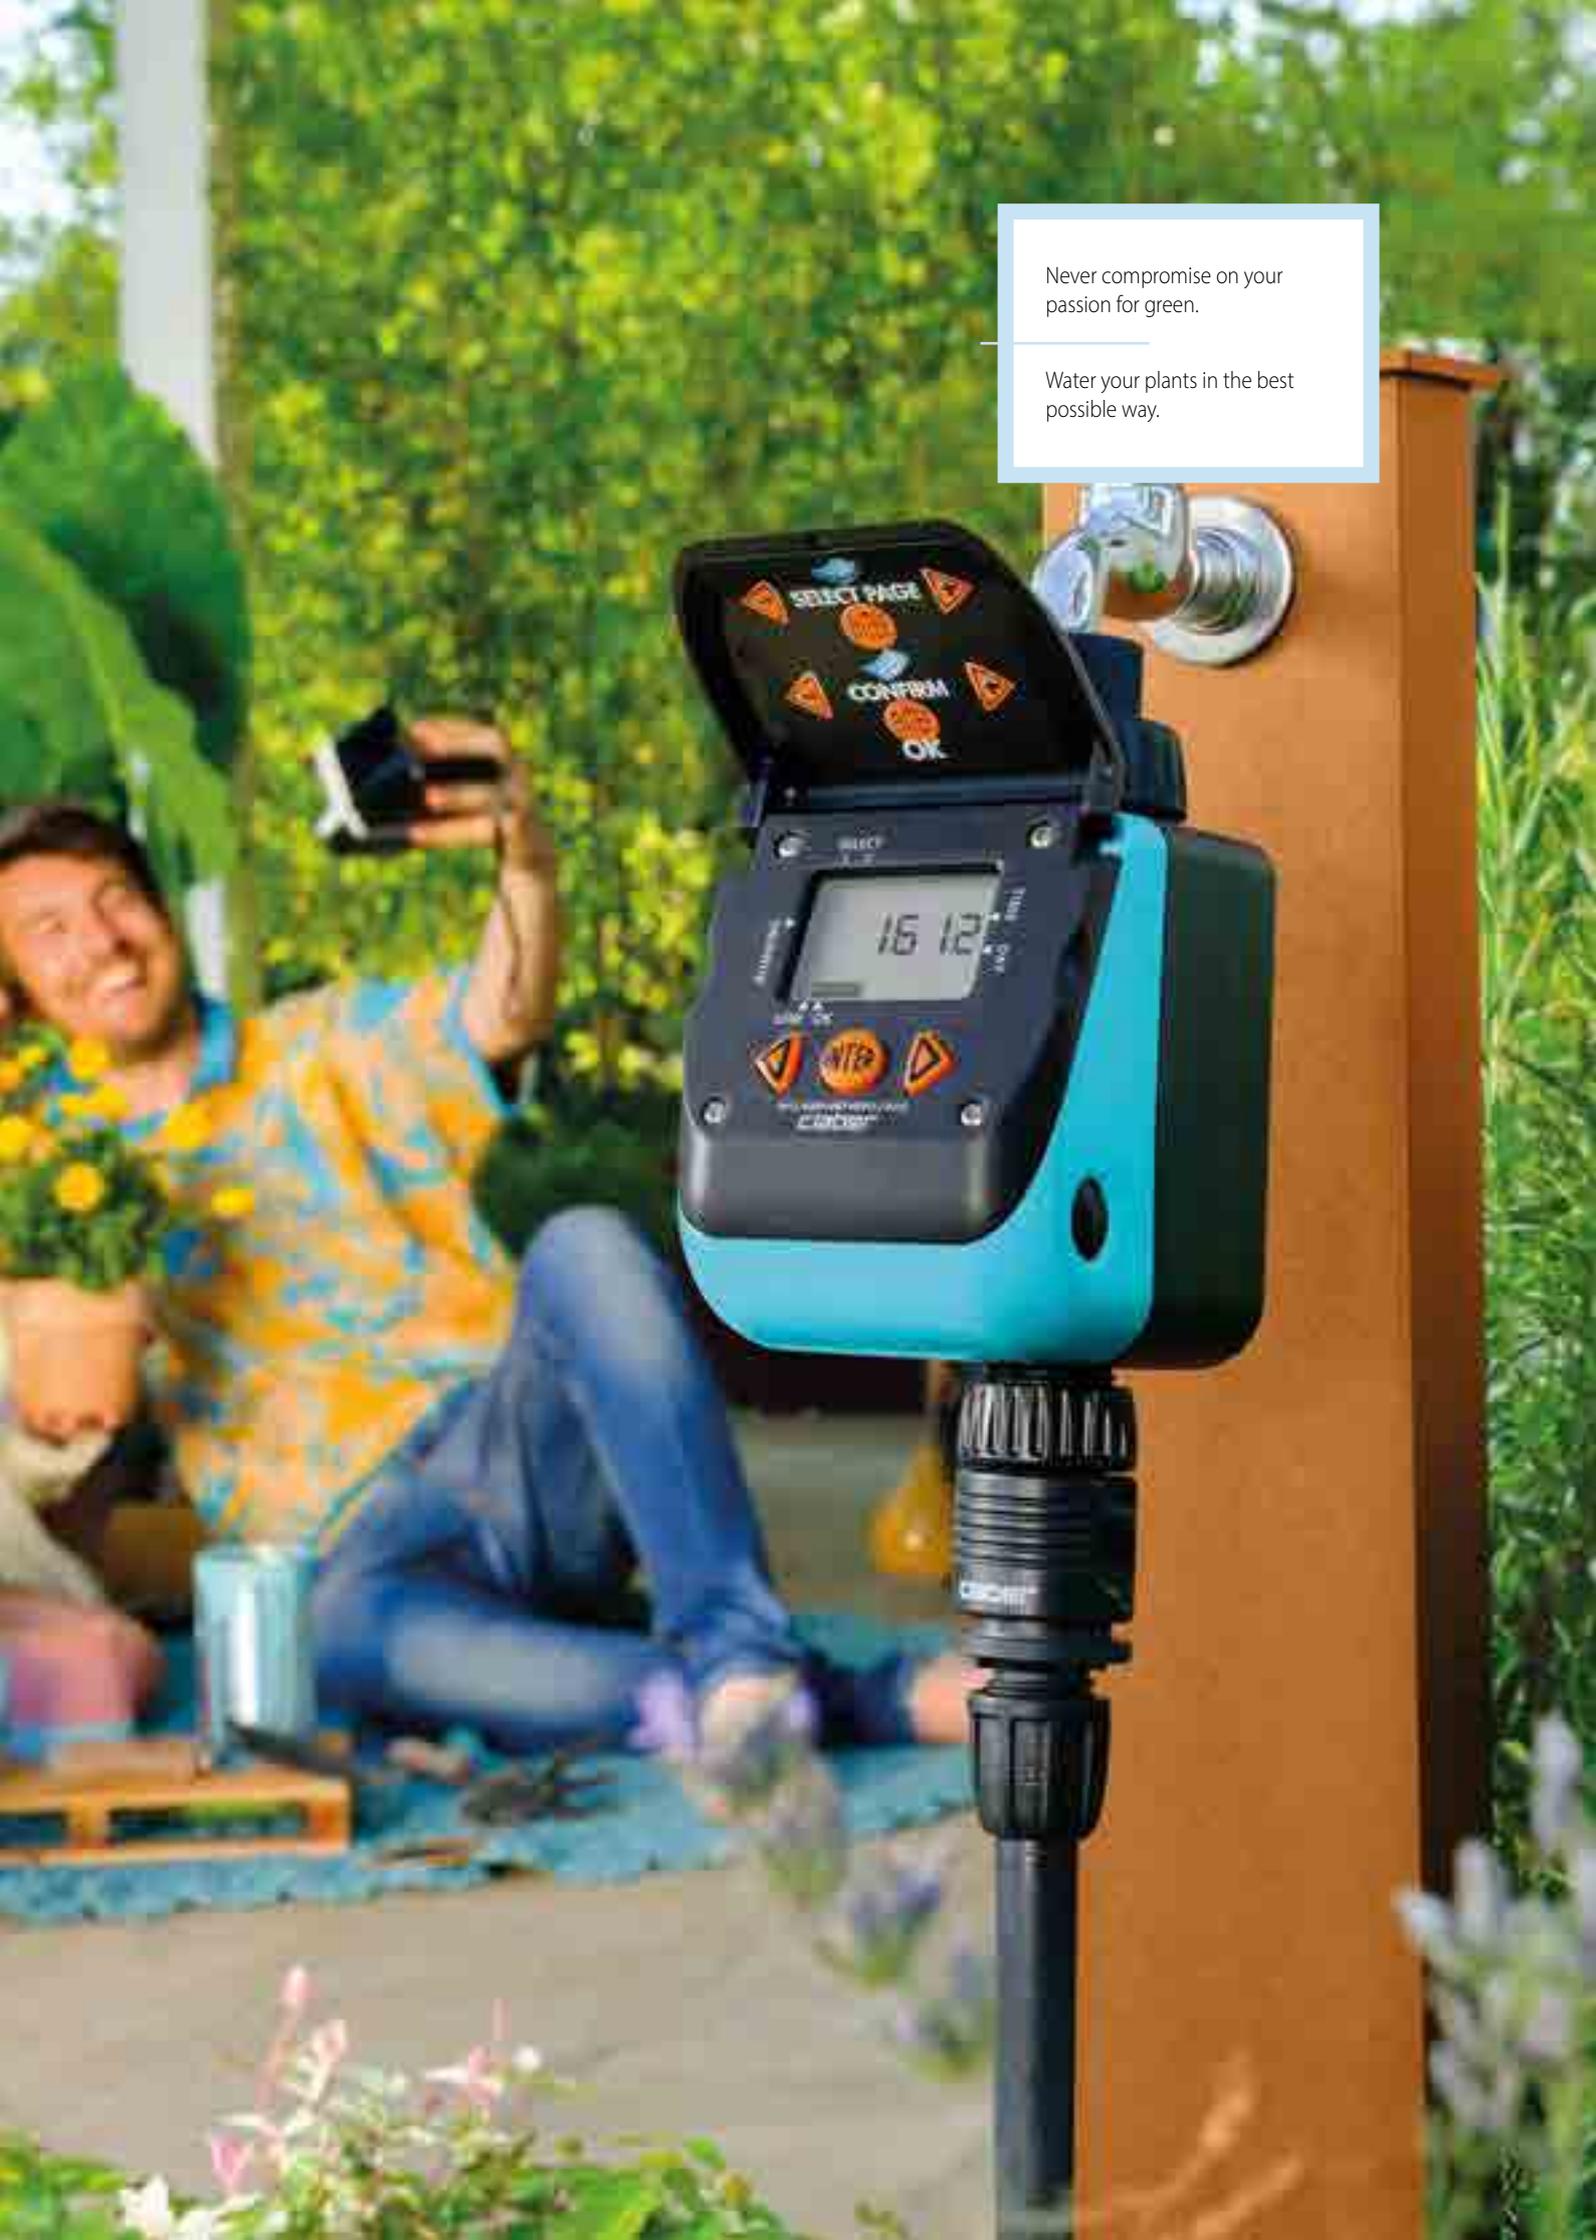



#### CAREFREE IRRIGATION

---

As the technological core of Claber systems, the easy-to-use and reliable timers allow you to manage your system according to an accurate, well-calibrated irrigation schedule. From the simplest models with preset programmes, to those with customisable features, there is the perfect timer model for everybody.



#### DROP BY DROP

---

Claber drippers provide constant, accurate and gentle watering. The drops are distributed near the roots of each plant, keeping them happy and healthy, without wasting water.



#### SPRING RAIN

---

RainJet micro-sprinklers can be used to distribute a water spray or delicate jet over a specific area with a great level of accuracy.



#### THERE FOR YOU, EVEN WHEN YOU'RE NOT

---

Aqualux System is the solution for watering your house plants while you are away for short or long periods.

This discrete, efficient drip irrigation system lets you travel carefree.


A woman with dark hair, wearing a white button-down shirt and green shorts, stands in a lush garden. She is holding a small grey remote control in her right hand and has her left hand on the handle of a white Claber irrigation tank. The tank is on a black metal frame with two wheels. The background is filled with green foliage and white flowers. The scene is brightly lit, suggesting a sunny day.

## IRRIGATION THAT HITS THE SPOT

As the most delicate form of irrigation, this system provides delicate drops or a water spray for the plants you love. The most innovative solutions, making sure you don't have to give up on greenery, even when you are away. No matter where you are now or where you are going, Claber will take care of your green space.

# AQUAUNO® TIMERS

Aquauno® timers are both efficient and versatile. They are the simplest solution for automatically managing watering your patio, garden or vegetable patch. They are connected directly to the tap and are battery operated. No electrical connections needed. Thanks to the robust protective cover, isolated electronic circuits and stringent quality checks, our Aquauno timers are ultra-reliable, as well as being simple to use. Suitable even for small spaces and available in a variety of models, they are designed to meet any needs: from simple timers to models with dials and preset programmes, through to versions with screens you can program with three practical buttons.

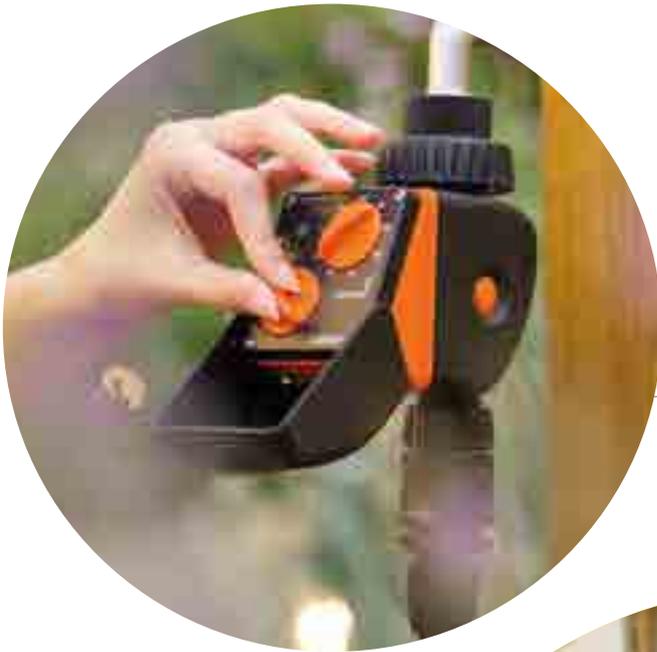

AQUAUNO®

Programming  
anyone can do

AQUAUNO SELECT:  
TWO PRACTICAL DIALS, 63  
DIFFERENT PROGRAMMES

MANUAL TAP TIMER:  
5 TO 120 MINS  
OF WATERING

CONTINUOUS  
FLOW OPTION

NO BATTERY  
REQUIRED



NEW FOR 2025

MANUAL TAP TIMER

8421



Mechanical tap timer. Turn the ring nut to set a watering time of 5 to 120 minutes with automatic shut-off. Option to open with continuous water flow and manual closing. No battery required. Fitted with washable filter. 1" tap connector (26-34mm) with 3/4" adapter (20-27 mm). Quick-Click coupling. Operating pressure from 1 to 5 bar.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8421		4	7,9 x 24 x 6,5	26,5 x 25 x 10	0,006	0,84	384	8 000625 084210

AQUAUNO PRATICO

8425



It's easy to use. Simply press the green button to start the program, then the red button when watering is sufficient. Pratico memorises the time that has elapsed between the two operations and repeats the program (maximum duration 60 minutes) at the same time every day. A led indicates all programming phases and can display the times you have set at any moment. You can also set the watering times with a simple pulse code using the same two buttons and the led. The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. It runs off a single 9V alkaline battery which lasts the entire season. The electronic components are perfectly sealed. Operating water pressure from 0,5 to 10 bar. 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8425		2	7 x 20,5 x 14,8	25 x 10 x 19	0,005	0,93	288	8 000625 084258

AQUAUNO LOGICA

8422



An automatic one-line water timer containing 15 preset cycles, selected using an exclusive control rotary knob. Simply by turning the knob to any one of the 15 numbered notches you can set the program required in a matter of seconds. All the programs available are summarized in a diagram printed on the cover. The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9V alkaline battery can power the unit for an entire season. The electronic components are perfectly sealed. With an operating pressure range of 0,5 to 10 bar, Aquauno Logica is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8422		2	7 x 20,5 x 14,8	25 x 10 x 19	0,005	0,93	288	8 000625 084227

## AQUAUNO SELECT

8423



One-way automatic timer. 63 preset programmes (+ off and 5-minute test). Easy programming by way of 2 knobs: one with 7 frequencies, the other with 9 watering times; simply turn the knobs for the required setting. Equipped with washable filter. 3/4" (20-27 mm) tap connector. Powered by a 9V alkaline battery, which will last an entire season. Electronic components are perfectly sealed. Operating pressure from 0,5 to 10 bar. 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8423		2	7 x 20,5 x 14,8	25 x 10 x 19	0,005	0,93	288	8 000625 084234

## AQUAUNO VIDEO-2

8428



Using this automatic one-line water timer you can set 2 watering cycles a day. Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers. 2 Water cycle times vary from 1 min to 23 hours and 59 min. Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required. The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator). The electronic components are perfectly sealed. With an operating pressure range of 0,5 to 10 bar, Aquauno Video-2 is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8428		2	7 x 20,5 x 14,8	25 x 10 x 19	0,005	0,94	288	8 000625 084289

## AQUAUNO MIST

8496



Automatic one-way timer, ideal for cyclical automation of both Happy Fresh cooling systems and watering systems on the terrace and in the garden. Easy programming with 2 rotary knobs: one to set the frequency and the other to select the run time. 27 programs can be selected for drip systems (yellow sector, run time from 2 to 90 mins every 12, 24 or 48 hours), 24 possible combinations for Happy Fresh systems (blue quadrant, run time from 5 to 45 seconds, every 1, 3, 5, 10 mins). Option of 5 min test function. Equipped with washable filter. Works with 9 V alkaline battery. Electronic part perfectly sealed. Operating pressure from 0,5 to 10 bars. 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8496		2	7 x 20,5 x 14,8	25 x 10 x 19	0,005	0,93	288	8 000625 084968

# AQUAUNO® PLUS AND AQUADUE® TIMERS

Emblems of design and practical to use, the Aquauno Plus timers are the latest evolution of the Aquauno line, now with the option to connect to the Claber Rain Sensor, which pauses watering when it rains.


Reliable and long-lasting, they are designed to suit the most diverse of routines: the Video model offers endless personalisation options, with multiple buttons and its own display screen, while Logica allows you to get started straight away using one of its 15 programmes, simply by turning the dial.

The two-way Aquadue Duplo timers complete the family and can be used to manage one or two separate lines. With Aquadue Duplo you only need one tap to program watering for both your patio and garden, for example.

## PLUS AND DUPLO

So you don't waste  
a single drop

OPTIONAL  
RAIN SENSOR

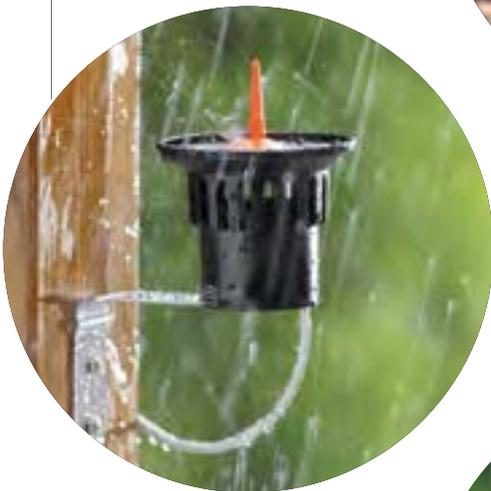

DUPLO  
TWO IRRIGATION LINES



CREATE YOUR  
OWN PROGRAMMES

## AQUAUNO LOGICA PLUS

8419



An automatic one-line water timer containing 15 preset cycles, selected using an exclusive control rotary knob. Simply by turning the knob to any one of the 15 numbered notches you can set the program required in a matter of seconds. All the programs available are summarized in a diagram printed on the cover. A led lights up when the timer is in operation. The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season. The electronic components are perfectly sealed. With an operating pressure range of 0,5 to 10 bar, Aquauno Logica Plus is 100% quality controlled and tested. Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8419		2	8,2 x 23,5 x 12,8	26,5 x 10 x 25	0,006	1,27	192	8 000625 084197

## AQUAUNO VIDEO-2 PLUS

8412



Using this automatic one-line water timer you can set 2 watering cycles a day. Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers. 2 Water cycle times vary from 1 min to 23 hours and 59 min. Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required. The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator) the electronic components are perfectly sealed. With an operating pressure range of 0,5 to 10 bar, Aquauno Video-2 Plus is 100% quality controlled and tested. Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8412		2	8,2 x 23,5 x 12,8	26,5 x 10 x 25	0,006	1,34	192	8 000625 084128

## AQUAUNO VIDEO-6 PLUS

8413



Using this automatic one-line water timer you can set 6 watering cycles a day. Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers. 6 Water cycle times vary from 1 min to 23 hours and 59 min. Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required. The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector. One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator) the electronic components are perfectly sealed. With an operating pressure range of 0,5 to 10 bar, Aquauno Video-6 Plus is 100% quality controlled and tested. Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8413		2	8,2 x 23,5 x 12,8	26,5 x 10 x 25	0,006	1,32	192	8 000625 084135

AQUADUE DUPLO  
EVOLUTION

8410



Automatic two-way water timer.

Provides up to three irrigations a day for each line.

Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers.

Water cycle times vary from 1 min to 23 hours and 59 min.

Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required. The unit is fitted with a stainless steel filter. 3/4" (20-27 mm) tap connector.

Manual control function, selectable duration 15-60 min. Setting of current day.

One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator). The electronic components are perfectly sealed.

Designed for direct connection to the Rain Sensor (90915).

With an operating pressure range of 0,5 to 10 bar, Aquadue Duplo is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8410		2	10 x 24 x 12,7	28 x 13 x 25	0,008	1,80	144	8 000625 084102

## RAIN SENSOR

90915



Suitable for all watering systems, the rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining.

When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts down.

Programmed watering automatically resumes when the water in the sensor evaporates.

The rain sensor should be installed in an outdoor area exposed to rain using the stainless steel bracket provided.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90915		2	8,5 x 20,5 x 11	25 x 10 x 19	0,005	0,64	288	8 000625 909155

SPARE 3/4" (20-27 mm)  
F CONNECTOR

91006



Replacement tap connector for Aquauno and Aquadue water timers.

Comprises:

- 3/4" (20-27 mm) female tap connector
- washable filter
- ring nut
- o-ring.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91006		10	7,9 x 15,7 x 3,0	25 x 10 x 19	0,005	0,55	1440	8 000625 910069



# TEMPO TIMERS AND DUAL

A backlit LCD display, better protection against weather, immediate or delayed start and connection to the Rain Sensor (with or without wires) are just some of the strengths of this innovative family of digital timers.

Tempo and Dual featuring 1 or 2 irrigation lines meet every requirement, thanks to the wide range of programming options in the Select range and the choice of preset solutions in the Logic range.



DRIP IRRIGATION

## TEMPO LOGIC

**8483**



One-way automatic water timer. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with a single digital button. 19 preset programmes (+ off), listed on the front cover. Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

<b>Bar</b>	0,5	1	2	2,5	3	4	5
<b>l/min</b>	12	17	23	25	27	30	33

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8483		2	9 x 23 x 12	25 x 10 x 19	0,005	1,21	252	8 000625 084838

## TEMPO SELECT

**8486**



One-way automatic water timer. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with two digital buttons, one selecting 14 watering times, the other 7 frequencies for each line. 98 possible programmes (+ off). Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

<b>Bar</b>	0,5	1	2	2,5	3	4	5
<b>l/min</b>	12	17	23	25	27	30	33

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8486		2	9 x 23 x 12	25 x 10 x 19	0,005	1,22	252	8 000625 084869

DUAL LOGIC

**8485**



Two-way automatic water timer, with watering on two independent lines. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with a single digital button. 19 preset programmes (+ off) for each line, listed on the front cover. Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start, on both lines. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	16	20	28	30	32	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8485		2	16 x 23 x 12	38 x 17 x 13	0,008	2,00	160	8 000625 084852

DUAL SELECT

**8488**



Two-way automatic water timer, with watering on two independent lines. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with two digital buttons: one selecting 14 watering times, the other 7 frequencies for each line. 98 possible programmes (+ off) for each line. Backlit LCD screen showing the different functions. Start button allowing immediate or delayed (up to 23 hours) start on both lines. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	16	20	28	30	32	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8488		2	16 x 23 x 12	38 x 17 x 13	0,008	2,00	160	8 000625 084883

RAIN SENSOR RF

**90831**



Rain sensor operating on radio frequency. Suspends watering in case of rainfall. Dialogues with Tempo, Dual timers and Hydro-4. The RF Rain Sensor is designed for open air installation, exposed to rainfall, using a special stainless steel bracket supplied with the product. No electrical connections are required: RF coverage up to 30 m. Powered by 2 x 1.5 V AA alkaline batteries.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90831		1	8,5 x 20,5 x 11	8,5 x 20,5 x 11	0,002	0,26	288	8 000625 908318

RF RAIN SENSOR INTERFACE

**8480**



Connection interface for RF Rain Sensor (90831), used with Dual and Tempo water timers. In case of rainfall, watering is suspended by radio control, without any use of electrical connections. RF coverage up to 30 m.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8480		2	8 x 15 x 1,5	13 x 10 x 19	0,001	0,08	648	8 000625 084807

# MYAQUASOLAR TEMPO AND DUAL TIMERS


myAquaSolar is the first and only smart timer that, thanks to its latest-generation photovoltaic panel, works without batteries and without needing direct, constant exposure to the sun. Indirect light is enough to power the timer perfectly. myAquaSolar is available in versions with one or two irrigation lines and can be conveniently programmed right from your smartphone via Bluetooth®, using the intuitive myAquaSolar app.



MYAQUASOLAR

Naturally innovative

NO BATTERY  
100% SOLAR ENERGY

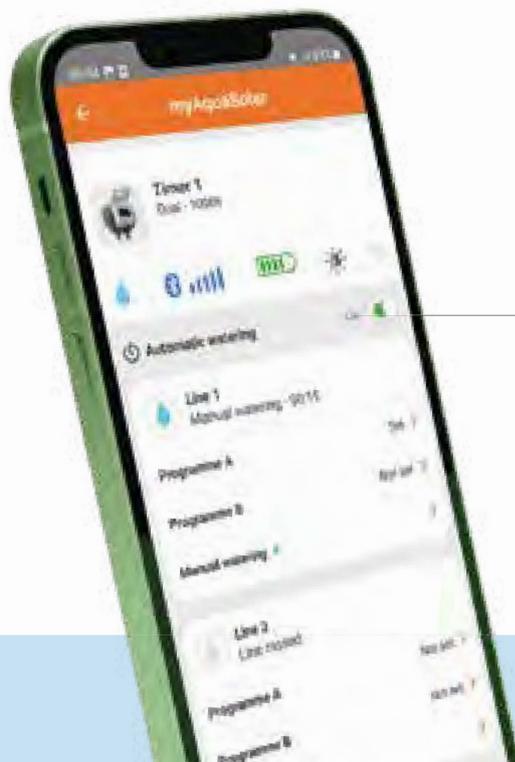

SMART  
PROGRAMMING  
WITH THE  
MYAQUASOLAR APP

GET IT ON  
Google Play

DOWNLOAD ON THE  
Apple Store



myAquaSolar

FREE DOWNLOAD WITH NO SUBSCRIPTION COSTS,  
AVAILABLE FOR SMARTPHONES.



## TEMPO MYAQUASOLAR

8497



One-way automatic water timer. Equipped with a built-in photovoltaic panel, this timer is powered by solar energy even without the panel being exposed directly to sunlight. No batteries required. Easy programming with Bluetooth® technology and Claber myAquaSolar app. 2 fully customisable programmes. Button to turn off the timer and start manual function (that can also be activated from app). Weekly watering cycles may also be programmed with the exception of the days you wish to omit. Electronic components fully insulated. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915). 100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8497		2	11,8 x 21 x 11,5	28 x 25 x 13	0,009	1,25	144	8 000625 084975

## DUAL MYAQUASOLAR

8498



Two-way automatic water timer, with watering on two independent lines. Equipped with a built-in photovoltaic panel, this timer is powered by solar energy even without the panel being exposed directly to sunlight. No batteries required. Easy programming with Bluetooth® technology and Claber myAquaSolar app. 2 fully customisable programmes per line. Button to turn off the timer and start manual function (that can also be activated from app). Weekly watering cycles may also be programmed with the exception of the days you wish to omit. Electronic components fully insulated. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915). 100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8498		2	15 x 21 x 11,5	38 x 17 x 13	0,008	1,70	160	8 000625 084982





AQUAUNO PLUS			AQUADUE	TEMPO		DUAL		MYAQUASOLAR	
<b>8419</b>	<b>8412</b>	<b>8413</b>	<b>8410</b>	<b>8483</b>	<b>8486</b>	<b>8485</b>	<b>8488</b>	<b>8497</b>	<b>8498</b>
<b>AQUAUNO LOGICA PLUS</b>	<b>AQUAUNO VIDEO-2 PLUS</b>	<b>AQUAUNO VIDEO-6 PLUS</b>	<b>AQUADUE DUPLO EVOLUTION</b>	<b>TEMPO LOGIC</b>	<b>TEMPO SELECT</b>	<b>DUAL LOGIC</b>	<b>DUAL SELECT</b>	<b>TEMPO MYAQUASOLAR</b>	<b>DUAL MYAQUASOLAR</b>
<b>1 x</b> <b>9V ALKALINE</b>	<b>1 x</b> <b>9V ALKALINE</b>	<b>1 x</b> <b>9V ALKALINE</b>	<b>1 x</b> <b>9V ALKALINE</b>	<b>2 x</b> <b>AA 1,5V ALKALINE</b>	<b>2 x</b> <b>AA 1,5V ALKALINE</b>	<b>2 x</b> <b>AA 1,5V ALKALINE</b>	<b>2 x</b> <b>AA 1,5V ALKALINE</b>	photovoltaic panel 	photovoltaic panel 
3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut
3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	1/2" (15 x 21 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)
1	1	1	2	1	1	2	2	1	2
NO	YES	YES	YES	YES	YES	YES	YES	NO	NO
NO	NO	NO	NO	YES	YES	YES	YES	NO	NO
0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar
3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C
Rotary knob	3 buttons	3 buttons	3 buttons	3 buttons	4 buttons	3 buttons	4 buttons	myAquaSolar app	myAquaSolar app
15, preset	2	6	up to 3 irrigation cycles per line	19 preset (+ off)	98 settable programmes per line (combining times and frequencies)	19 preset (+ off) per line	98 settable programmes per line (combining times and frequencies)	2	2 per line
1 - 60 mins	1min - 23 h 59 mins	1min - 23 h 59 mins	1min - 23 h 59 mins	1 - 90 mins	1 - 90 mins	1 - 90 mins	1 - 90 mins	1 min - 3h 59 min	1 min - 3h 59 min
from 2 per day to 1 per week	up to 2 per day	up to 6 per day	up to 3 per day per line	from 3 per day to 1 per week	from 3 per day to 1 per week	from 3 per day to 1 per week	from 3 per day to 1 per week	from 2 per day to 1 per week	up to 2 per day per line, to 1 per week
NO	YES	YES	YES	NO	NO	NO	NO	YES	YES
NO	YES	YES	YES	YES	YES	YES	YES	YES	YES
NO	15 mins (early stop possible)	15 mins (early stop possible)	min. 15 mins - max. 60 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)	settable 1 min - 3h 59 min	settable 1 min - 3h 59 min
NO	You set the start time	You set the start time	You set the start time	YES, up to 23 hours	You set the start time	You set the start time			
LED	YES	YES	YES	YES	YES	YES	YES	YES, from the app	YES, from the app
NO (flashes once every 2 secs to indicate watering under way or waiting to start)	YES (set programme number flash)	YES (set programme number flash)	YES (set programme number flash)	YES	YES	YES	YES	YES, from the app	YES, from the app
YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	YES, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	Yes, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	Yes, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)
3 years	3 years	3 years	3 years	3 years	3 years	3 years	3 years	3 years	3 years

# FEEDING, MAIN AND DRIPPER TUBES

Sturdy, algae- and UV-resistant: with Claber's main and feeding hoses, you can easily create any drip irrigation or micro-irrigation system. To help you water hedges, borders and flowerbeds easily and uniformly, Claber offers dripper and soaker hoses.

Simply connect up the hose to the tap and start saving time and precious water right away! Alternatively, why not use them with a Claber battery-operated timer to water your plants at the ideal time with just the right amount of water?



## FEEDING TUBE 5 m

**90371**



1/4" (4 - 6 mm) tube for branching off the main tube. Supplies the in-line and end-of-line drippers. Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90371		14	14 x 3,5 x 14	28 x 19 x 25	0,013	1,48	672	

## FEEDING TUBE 20 m

**90370**



1/4" (4 - 6 mm) tube for branching off the main tube. Supplies the in-line and end-of-line drippers. Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90370		5	18 x 5,5 x 18	28 x 19 x 25	0,013	1,85	240	

## FEEDING TUBE 20 m GREEN

**90375**



1/4" (4 - 6 mm) tube for branching off the main tube. Supplies the in-line and end-of-line drippers. Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90375		5	18 x 5,5 x 18	28 x 19 x 25	0,013	1,85	240	

MAIN TUBE 15 m

**90362**



1/2" (13 - 16 mm) polyethylene tube for the main line.  
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90362		1	Ø 40 x 8	Ø 40 x 8	0,010	1,00	72	8 000625 903627

MAIN TUBE 25 m

**90365**



1/2" (13 - 16 mm) polyethylene tube for the main line.  
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90365		1	Ø 42 x 10	Ø 42 x 10	0,014	1,65	60	8 000625 903658

MAIN TUBE 25 m  
WHITE

**90368**



1/2" (13 - 16 mm) polyethylene tube for the main line.  
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90368		1	Ø 42 x 10	Ø 42 x 10	0,014	1,65	60	8 000625 903689

MAIN TUBE 50 m


**90366**



1/2" (13 - 16 mm) polyethylene tube for the main line.  
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90366		1	Ø 44 x 15	Ø 44 x 15	0,023	3,07	28	8 000625 903665

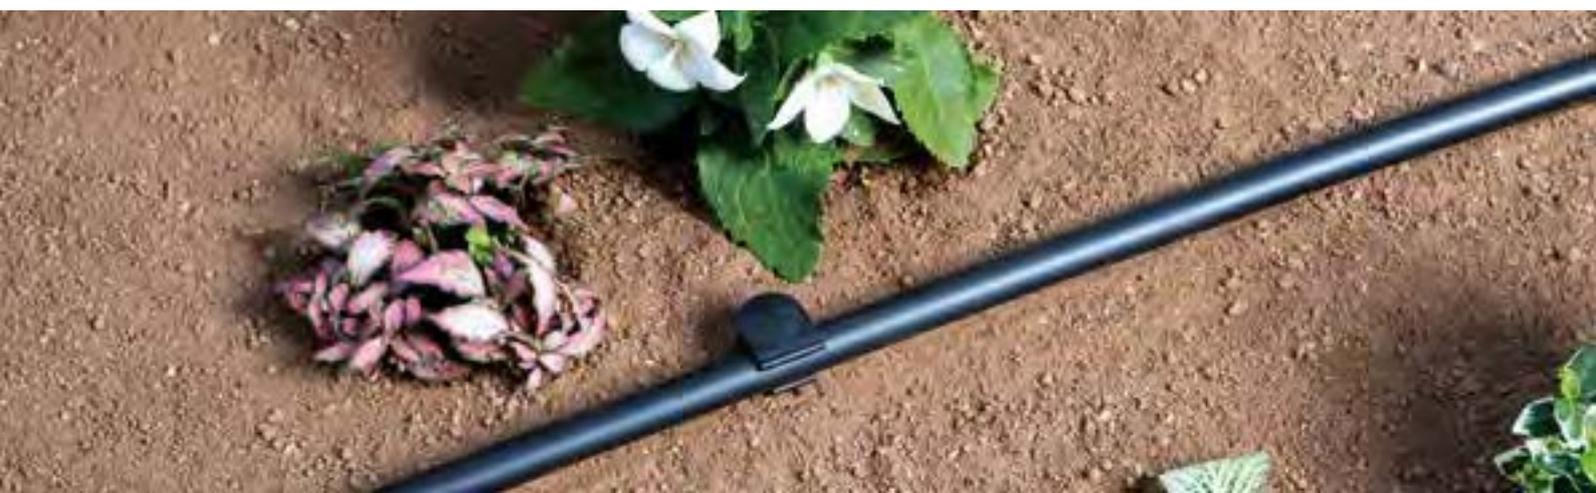

### 1/4" DRIPPER TUBE 15 m

**90353**



1/4" (4-6 mm) polyethylene tube.  
Fitted with internal 1,2 l/h labyrinth drippers at 30 cm intervals which ensure even irrigation over the entire cultivated area.  
Reduced water consumption: operating 0,5 - 1 bar.

Bar	0,5	1,0	1,5	2,0
L/H	2,4	2,8	3,2	3,5



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90353		5	23 x 5 x 21,5	23 x 25 x 26	0,015	1,51	225	8 000625 903535

### DRIPPER TUBE 25 m

**90355**



1/2" (13-16 mm) polyethylene tube.  
Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.  
Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90355		1	Ø 50 x 9,5	Ø 50 x 9,5	0,023	1,61	32	8 000625 903559

### DRIPPER TUBE 25 m BROWN

**90356**



1/2" (13-16 mm) polyethylene tube.  
Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.  
Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90356		1	Ø 50 x 9,5	Ø 50 x 9,5	0,023	1,60	32	8 000625 903566

### DRIPPER TUBE 50 m

**90357**



1/2" (13-16 mm) polyethylene tube.  
Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.  
Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90357		1	Ø 60 x 12	Ø 60 x 12	0,033	2,88	12	8 000625 903573

### 2,1 L/H SELF-REGULATING DRIPPER TUBE 25 m

**90354**



1/2" (13-16 mm) polyethylene tube.  
Fitted with internal labyrinth of 2,1 l/h self-regulating drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.  
Reduced water consumption: operating 0,5 - 4 bar.

Bar	0,5	1,0	1,5	2,0	2,5
L/H	2,1	2,1	2,1	2,1	2,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90354		1	Ø 50 x 9,5	Ø 50 x 9,5	0,023	1,61	32	8 000625 903542

CLABER DRIPPER HOSES HAVE  
SMALL DRIPPERS POSITIONED  
AT REGULAR INTERVALS.



### 1/2" SOAKER HOSE 15 m

**90350**



Slowly diffuses the water through its capillary walls. Strong but flexible, designed to be laid around plants or with covering of soil. Continuous drainage even in freezing conditions. Suitable for low flow rates: operating pressure 0,5 - 2 bar.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90350		1	Ø 38 x 7	Ø 38 x 7	0,010	1,45	54	8 000625 903504

### 1/2" SOAKER HOSE 25 m

**90351**



Slowly diffuses the water through its capillary walls. Strong but flexible, designed to be laid around plants or with covering of soil. Continuous drainage even in freezing conditions. Suitable for low flow rates: operating pressure 0,5 - 2 bar.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90351		1	Ø 38 x 11	Ø 38 x 11	0,017	2,55	42	8 000625 903511

SOAKER HOSES ARE IDEAL FOR WATERING YOUR VEGETABLE PATCH EVENLY.



# TRIPLE-SPRINKLER HOSES

For a practical and versatile irrigation experience, Claber presents Triply, a range of triple-soaker hoses equipped with regular micro-punctures and a double-sided core. Thanks to its triple line, the triple-soaker hose releases countless jets of water and can be used to spread a gentle, calibrated rain (with the holes facing up), or to ensure the right humidity of the earth (with the holes facing down). The Quick-Click socket ensures fast installation, making it the ideal partner for watering borders, flowerbeds and small vegetable patches or gardens.



## THE IDEAL PARTNER

for watering borders, flowerbeds and small vegetable patches.



### TRIPLY 7,5 m

**90376**



Triple-sprinkler hose with regular micro-punctures on one side. Laid out with the holes facing up, it releases countless jets. With the holes facing down it waters the ground by saturation. Equipped with a Quick-Click socket to connect to the water outlet. Operating pressure from 1 to 3 bar. Water flow rate: from 3 l/min to 8 l/min.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90376		3	31 x 4 x 29	40 x 40 x 13	0,02	2,43	108	8 000625 903764

### TRIPLY 15 m

**90377**



Triple-sprinkler hose with regular micro-punctures on one side. Laid out with the holes facing up, it releases countless jets. With the holes facing down it waters the ground by saturation. Equipped with a Quick-Click socket to connect to the water outlet. Operating pressure from 1 to 3 bar. Water flow rate: from 5 l/min to 13 l/min.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90377		3	38 x 4 x 38	40 x 40 x 13	0,02	4,20	108	8 000625 903771

# BLOCK-SYSTEM RAINJET®

## BLOCK-SYSTEM CONNECTORS AND COUPLINGS: RAINJET EVOLUTION

A complete family of compression connectors and couplings for 1/2" hoses, bringing innovative features to the extensive range of RainJet drippers and accessories.

The special locking system with the characteristic Block-System ring nut has been designed to guarantee a perfect seal that lasts, with no water leakage and no risk of impurities entering the system. It helps to make any DIY system, like Colibrì micro-irrigation, even easier to set up.

### PRESSURE REDUCER

**91040**


Automatically reduces and maintains inlet water pressure at a constant pressure of 1 bar (max. 10 bar).  
Connects to 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91040		4	10,2 x 20,6 x 4	26,5 x 10 x 25	0,006	0,46	384	8 000625 910403

### DOUBLE TAP CONNECTOR

**91045**

**LIMITED STOCK**


Tap connectors with double independent adjustment, for connecting two lines to a single water tap.  
Screwed onto taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91045		8	7,9 x 24 x 5	26,5 x 10 x 25	0,006	0,93	768	8 000625 910458

### 3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER

**91589**


Two-way adapter with double independent adjustment.  
For taps with 3/4" (20-27 mm) thread; enables assembly of two electronic timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91589		5	15,4 x 24 x 5,3	28 x 13 x 25	0,009	1,08	360	8 000625 915897

### 3/4" (20-27 mm) - 1/2" (15-21 mm) MULTI-THREAD TAP CONNECTOR

**91002**

**LIMITED STOCK**


To connect automatic Quick-Click tap fittings; female 3/4" (20-27 mm) thread and 1/2" (15-21 mm) adaptor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91002		14	7,9 x 15,7 x 3,5	26,5 x 10 x 25	0,006	0,57	1344	8 000625 910021

3/4" (20-27 mm)  
AUTOMATIC ADAPTOR**91494**

Used to connect the pressure reducer, 1/2" (13-16 mm) main hose adaptor, 1/4" (4-6 mm) threaded hose adaptor, and other accessories with 3/4" (20-27 mm) female thread to electronic timers.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91494		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,39	1440	8 000625 914942

## AUTOMATIC COUPLING

**99009**

To connect 1/2" (13-16 mm) main tube to an outlet with automatic tap fitting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99009		25	3,5 x 7 x 3,5	10 x 39 x 13	0,005	0,86	3000	8 000625 990092
91009		10	7,9 x 15,7 x 4,5	25 x 10 x 19	0,005	0,47	1440	8 000625 910090

IN-LINE FILTER FOR 1/2"  
(13-16 mm) HOSE**91011**

For water filtering in drip or microirrigation systems. Installed in-line, directly on the 1/2" (13-16 mm) main hose. Easy-to-clean mesh filter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91011		4	10,2 x 20,6 x 3,4	26,5 x 10 x 25	0,006	0,40	384	8 000625 910113

1/2" (13-16 mm) HOSE  
THREADED ADAPTOR**99013**

For direct connection of 1/2" (13-16 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99013		25	3,5 x 5,5 x 3,5	10 x 39 x 13	0,005	0,74	3000	8 000625 990139
91013		14	7,9 x 15,7 x 3,8	26,5 x 10 x 25	0,006	0,62	1344	8 000625 910137

3/4" (20-27 mm) 1" (26-34 mm) THREADED  
COUPLING FOR 1/2" (13-16 mm) HOSE**99015**

To connect 1/2" (13-16 mm) main tube to an outlet with 3/4" (20-27 mm) or 1" (26-34 mm) female thread (e.g. solenoid valves).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99015		25	4,2 x 5,75 x 4,2	10 x 39 x 13	0,005	0,75	3000	8 000625 990153
91015		10	7,9 x 15,7 x 4,5	25 x 10 x 19	0,005	0,44	1440	8 000625 910151

### 1/2" (15-21 mm) THREADED 3-WAY CONNECTOR

**99017**



**91017**



Used for connecting underground Colibrì micro-sprinklers in series (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99017		25	10 x 4,9 x 2,8	10 x 39 x 13	0,005	0,81	3000	8 000625 990177
91017		10	10 x 20,6 x 3,4	28 x 13 x 25	0,009	0,60	720	8 000625 910175

### 1/2" (15-21 mm) THREADED ELBOW

**99019**



**91019**



Used for end line connection of Colibrì underground micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99019		25	6,3 x 4,8 x 2,8	10 x 39 x 13	0,005	0,60	3000	8 000625 990191
91019		12	7,9 x 15,7 x 3,0	25 x 10 x 19	0,005	0,42	1728	8 000625 910199

### 1/2" (15-21 mm) THREAD ELBOW CONNECTOR

**99021**



**91021**



For elbow connection of Colibrì micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99021		25	6,55 x 5,65 x 6,55	10 x 39 x 13	0,005	1,05	3000	8 000625 990214
91021		6	7,9 x 15,7 x 4,5	25 x 10 x 19	0,005	0,29	864	8 000625 910212

### 1/2" (13-16 mm) COUPLING

**99023**



**91023**



Enables coupling of two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99023		25	3 x 8 x 3	10 x 39 x 13	0,005	0,66	3000	8 000625 990238
91023		12	7,9 x 15,7 x 3,0	25 x 10 x 19	0,005	0,47	1728	8 000625 910236

### 1/2" (13-16 mm) ELBOW COUPLING

**99025**



**91025**



Enables coupling of two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99025		25	6,45 x 6,45 x 2,8	10 x 39 x 13	0,005	0,70	3000	8 000625 990252
91025		12	7,9 x 15,7 x 3,0	25 x 10 x 19	0,005	0,49	1728	8 000625 910250

**1/2" (13-16 mm) CONNECTOR WITH 4 1/4" (4-6 mm) OUTLETS****99027****91027**

Useful for allowing up to four drippers inside pots or large flower containers. Ideal for flower-beds or border micro irrigation systems, branching the lines from a single water tap. Plugs supplied for closing any outlets not used.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99027		25	2,8 x 10 x 2,8	10 x 39 x 13	0,005	0,80	3000	8 000625 990278
91027		4	10 x 20,6 x 3,4	26,5 x 10 x 25	0,006	0,32	384	8 000625 910274

**1/2" (13-16 mm) TEE****99029****91029**

Enables coupling of three 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99029		25	10 x 6,5 x 2,8	10 x 39 x 13	0,005	0,94	3000	8 000625 990290
91029		10	10 x 20,6 x 3,5	28 x 13 x 25	0,009	0,66	720	8 000625 910298

**SHUT-OFF VALVE****99033****91033**

For water flow supply, shut-off and adjustment. For installation between two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99033		25	10 x 4,6 x 2,8	10 x 39 x 13	0,005	0,92	3000	8 000625 990337
91033		10	10 x 20,6 x 3,3	28 x 13 x 25	0,009	0,68	720	8 000625 910335

**END STOPPER****99035****91035**

To shut off water flow at the end of 1/2" (13-16 mm) main tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99035		25	2,8 x 4 x 2,8	10 x 39 x 13	0,005	0,46	3000	8 000625 990351
91035		12	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,37	1728	8 000625 910359

**THREADED DRAINAGE VALVE****91037**

Used for automatic drainage of the hose circuit. Recommended for zones subject to cold winters. With connector for 1/2" (13-16 mm) hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91037		5	10 x 20,6 x 4	26,5 x 10 x 25	0,006	0,39	480	8 000625 910373

# RAINJET® CONNECTORS AND ACCESSORIES

Couplings, tap connectors, spikes and drainage valve. The RainJet accessories can be used to create any drip or micro-irrigation system stress-free, as well as helping you to make any changes to the system over time, should your needs or plants change. All couplings and accessories are connected simply using pressure, with no need for any tool.

They are perfectly watertight. Using linear, elbow or tee connectors, you can create any layout you like. The RainJet accessories are ideal for creating any type of drip irrigation system, with a wide range of RainJet drippers to choose from. They can also be used to set an easy underground micro-irrigation circuit with Colibri System. A must-have to meet the needs of a constantly evolving sector!



## RAINJET BLOCK-SYSTEM

With the innovative Block-System compression connectors installation could not be any easier.



## RAINJET CONNECTORS AND ACCESSORIES

RainJet couplings and accessories are connected easily using pressure, with no need for any tools, and they are watertight.

### IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE

91031



LIMITED STOCK



For water filtering in drip or micro irrigation systems. Installed in-line, directly on the 1/2" (13-16 mm) main hose. Easy-to-clean mesh filter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91031		5	10 x 20,6 x 3,4	26,5 x 10 x 25	0,006	0,32	480



**1/2" (13-16 mm) HOSE  
THREADED ADAPTOR****91347**

For direct connection of 1/2" (13-16 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91347		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,36	1440	8 000625 913473

**1/2" (13-16 mm) - 1/4" (4-6 mm)  
HOSE THREADED ADAPTOR****91345**

For direct connection of 1/2" (13-16 mm) and 1/4" (4-6 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91345		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,37	1440	8 000625 913459

**3/4" (20-27 mm) 1" (26-34 mm) THREADED  
COUPLING FOR 1/2" (13-16 mm) HOSE****91066**

To connect 1/2" (13-16 mm) main tube to an outlet with 3/4" (20-27 mm) or 1" (26-34 mm) female thread (e.g. solenoid valves).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91066		10	7,9 x 15,7 x 4,2	25 x 10 x 19	0,005	0,38	1440	8 000625 910663

**1/2" (15 - 21 mm) THREADED  
3-WAY CONNECTOR****91072**

Used for connecting underground Colibri micro-sprinklers in series (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose. Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91072		10	7,9 x 15,7 x 3,7	25 x 10 x 19	0,005	0,39	1440	8 000625 910724

**1/2" (15-21 mm) THREADED  
ELBOW****91082**

Used for end line connection of Colibri underground micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) to main hose. Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91082		10	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,32	1440	8 000625 910823

**QUICK-CLICK CONNECTOR  
FOR 1/2" (13-16 mm) HOSE****91070**

Connector for joining two hoses in series: one for drip irrigation 1/2" (13-16 mm) and one hose with a Quick-Click automatic coupling on the end. Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91070		15	7,9 x 15,7 x 2	26,5 x 10 x 25	0,006	0,49	1440	8 000625 910700

## 1/2" (13-16 mm) COUPLING

**99076**Enables coupling of two 1/2" (13-16 mm) main tube sections.  
Blister of 4 pcs.**91076**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99076		6 x 20	15 x 15 x 3	10 x 39 x 13	0,005	0,81	720	8 000625 990764
91076		15	7,9 x 15,7 x 3	26,5 x 10 x 25	0,006	0,58	1440	8 000625 910762

## 1/2" (13-16 mm) ELBOW COUPLING

**99081**Enables coupling of two 1/2" (13-16 mm) main tube sections.  
Blister of 2 pcs.**91081**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99081		6 x 20	15 x 15 x 3	10 x 39 x 13	0,005	0,78	720	8 000625 990818
91081		15	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,38	2160	8 000625 910816

1/2" (13-16 mm) - 1/4" (4-6 mm)  
2 - WAY COUPLING**91073**Used to branch off 1/4" (4-6 mm) feeding tube sections from 1/2" (13-16 mm) main tube.  
Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91073		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,30	1440	8 000625 910731

## 1/2" (13-16 mm) TEE

**99071**Enables coupling of three 1/2" (13-16 mm) main tube sections.  
Blister of 2 pcs.**91071**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99071		4 x 20	14 x 22 x 3	10 x 39 x 13	0,005	0,80	480	8 000625 990719
91071		15	7,9 x 15,7 x 2,5	26,5 x 10 x 25	0,006	0,53	1440	8 000625 910717

1/2" (13-16 mm)  
END STOPPER**91086**To shut off water flow at the end of 1/2" (13-16 mm) main tube.  
Blister of 4 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91086		15	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,46	2160	8 000625 910861

**1/2" (13-16 mm) SHUT-OFF VALVE****91280**

For water flow supply, shut-off and adjustment.  
For installation between two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91280		10	7,9 x 15,7 x 4	25 x 10 x 19	0,005	0,34	1440	8 000625 912803

**TUBE CLAMP****91096**

For use when pressure in the 1/2" (13-16 mm) main tube exceeds 1,5 bar.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91096		10	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,39	1440	8 000625 910960

**1/2" (13-16 mm) SUPPORT STAKE****99090**

Enables secure ground fixture of the 1/2" (13-16 mm) main tube.  
Blister of 8 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99090		4 x 20	13 x 22 x 7	20 x 39 x 13	0,010	1,40	288	8 000625 990900
91090		10	15,4 x 24 x 3	39 x 23 x 20	0,018	1,77	480	8 000625 910908

**THREADED DRAINAGE VALVE****90920**

Used for automatic drainage of the hose circuit.  
Recommended for zones subject to cold winters.  
With connector for 1/2" (13-16 mm) hose.  
Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90920		4	7,9 x 15,7 x 3,5	12 x 10 x 19	0,002	0,15	1152	8 000625 909209

**WALL HOSE CLAMPS****91097**

Allows the 1/2" (13-16 mm) main hose to be firmly attached to a vertical surface (e.g. a wall).  
Blister pack of 5 pcs with screws and plugs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91097		10	7,9 x 15,7 x 3,7	25 x 10 x 19	0,005	0,70	1440	8 000625 910977

## 1/4" 2-WAY COUPLING

99155



Used to branch off 1/4" (4-6 mm) feeding tube sections from 1/2" (13-16 mm) main tube or to join two feeding tube sections. Easy grip and watertight seal, guaranteeing no leakage. Blister of 10 pcs.

91155



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99155		20x20	7,5 x 13 x 10	10 x 39 x 13	0,010	0,75	2400	8 000625 991556
91155		13	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,39	1872	8 000625 911554

## 1/4" ELBOW

91143



For connecting two pieces of 1/4" (4-6 mm) feeding hose at right angle. Easy grip and watertight seal, guaranteeing no leakage. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91143		13	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,40	1872	8 000625 911431

## 1/4" 3-WAY COUPLING

91141



Enables coupling of three 1/4" (4-6 mm) feeding tube sections. Easy grip and watertight seal, guaranteeing no leakage. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91141		13	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,42	1872	8 000625 911417

## 1/4" 4-WAY COUPLING

91145



Enables coupling of four 1/4" (4-6 mm) feeding tube sections. Easy grip and watertight seal, guaranteeing no leakage. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91145		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,45	1872	8 000625 911455

## HOLE PLUGS

91170



For sealing holes on 1/2" (13-16 mm) main tube or ends of 1/4" (4-6 mm) feeding tube. Easy grip and watertight seal, guaranteeing no leakage. Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91170		13	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,40	1872	8 000625 911707

## 1/4" SHUT-OFF VALVE

**91270**

For 1/4" (4-6 mm) feeding tube.  
Enables water flow adjustment and shut-off.  
Blister of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91270		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,34	1440	8 000625 912704


## HOLE PUNCHER/SPANNER

**91185**

Used to punch holes in 1/2" (13-16 mm) main tube.  
Also enables tightening and adjustment of micro-sprinklers.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91185		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,26	1440	8 000625 911854

## 1/4" SUPPORT STAKE

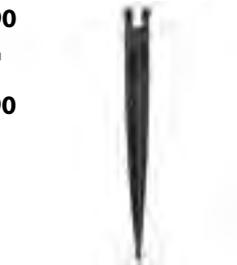**99190**

Ideal to secure ground fixture of the 1/4" (4-6 mm) feeding tube or installation in plant pots.  
Blister of 15 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99190		10 x 40	14 x 19 x 3	20 x 39 x 13	0,010	2,61	720	8 000625 991907
91190		10	15,4 x 24 x 2,5	28 x 19 x 25	0,013	1,43	480	8 000625 911905



# RAINJET® DRIPPERS

Claber drippers accurately distribute the ideal amount of water, always ensuring the best wellbeing of your plants.

Drippers, shrubblers and micro-mist sprayers let you create an efficient, completely autonomous irrigation line on any terrace, balcony, flowerbed or vegetable patch, distributing the quantity calibrated for each plant around its roots.

The wide range of Claber drippers comes with accessories and ready-to-use kits, to meet any irrigation need, without wasting a single drop of water. Smart irrigation that respects the environment, by Claber.

## END-OF-LINE DRIPPER

Complete and precise



ADJUSTABLE FLOW RATE  
AND PERFECTLY WATERTIGHT



CALIBRATED WATERING  
WITH NO WASTE

0-6 L/H END-OF-LINE DRIPPER

**99209**



**91209**



**91211**



**91213**



End-of-line dripper for localized watering. Adjustable from 0 to 6 litres for calibrated irrigation, to plants' different needs and soil type. Direct connection to the end of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning.

Blister pack:  
91209 – 10 pcs  
91211 – 20 pcs  
91213 – 40 pcs

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
99209		6 x 50	15 x 30 x 3	20 x 13 x 39	0,010	1,90	432	8 000625 992096
91209		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	0,83	960	8 000625 912094
91211		10	10 x 20,6 x 4	28 x 13 x 25	0,009	1,48	720	8 000625 912117
91213		8	15,4 x 24 x 3,5	39 x 20 x 23	0,018	2,40	384	8 000625 912131

0-6 L/H IN-LINE DRIPPER

**99217**



**91217**



In-line dripper for localized watering. Adjustable from 0 to 6 litres for calibrated irrigation, to plants' different needs and soil type. Direct connection between two ends of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning. Blister pack containing: 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
99217		6 x 50	14 x 18 x 5	20 x 13 x 39	0,010	2,14	432	8 000625 992171
91217		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	0,90	960	8 000625 912179

0-10 L/H PLUS END-OF-LINE DRIPPER

**91214**



End-of-line dripper for localized watering. 0-10 l/h adjustable flow rate, from fully closed to fully open. Accurate and calibrated flow control. Direct connection to the end of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning. Blister pack containing: 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
91214		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	1,03	960	8 000625 912148

0-10 L/H PLUS IN-LINE DRIPPER

**91218**



In-line dripper for localized watering. 0-10 l/h adjustable flow rate, from fully closed to fully open. Accurate and calibrated flow control without twisting the tube. Direct connection between two ends of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning. Blister pack containing: 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
91218		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	1,05	960	8 000625 912186

THE RELEASE OF WATER IS ACCURATE AND STEADY IN EVERY SITUATION



### SELF-REGULATING DRIPPER

**99222**



**91222**



Constant 4 l/h flow rate at start and end of line.  
For direct installation into the 1/2" (13-16 mm) main tube or into the 1/4" (4-6 mm) feeding tube.  
Easily disassembled for cleaning.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99222		10x50	14 x 17 x 4	20 x 13 x 39	0,010	2,80	720	8 000625 992225
91222		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	0,77	960	8 000625 912223

### 0-40 L/H ADJUSTABLE DRIPPER

**99225**



**91225**



For direct installation into the 1/2" (13-16 mm) main tube or into the 1/4" (4-6 mm) feeding tube.  
Flow rate adjustable from 0 to 40 litres per hour.  
Easily disassembled for cleaning.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99225		10x50	14 x 22 x 6,5	20 x 13 x 39	0,010	2,55	720	8 000625 992256
91225		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	0,73	960	8 000625 912254

### ADJUSTABLE SHRUBBLER

**99232**



**91232**



0-40 l/h adjustable flow, from fully closed to fully open.  
Watering over an area of 360°.  
Direct connection into the 1/4" (4-6 mm) feeding tube or into the 1/2" (13-16 mm) main tube.  
Readily inspectable for easy cleaning.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99232		10x50	14 x 22 x 3	20 x 13 x 39	0,010	2,65	720	8 000625 992324
91232		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	0,79	960	8 000625 912322

**0-40 L/H ADJUSTABLE DRIPPER****91227**

Adjustable dripper on spike.  
For direct installation into the 1/4" (4-6 mm) feeding tube.  
Ensures precise and localised irrigation at plant base.  
Flow rate adjustable from 0 to 40 litres per hour.  
Easily disassembled for cleaning.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91227		6	15,4 x 24 x 2,5	20 x 10 x 39	0,007	0,98	576	

**0-40 L/H ADJUSTABLE SHRUBBLER****99228**

Adjustable shrubbler on spike.  
Flow rate is adjustable from 0 to 40 litres per hour.  
Ensures precise and localised irrigation at plant base.  
Flow rate is adjustable according to various plant requirements.  
For direct installation into the 1/4" (4 - 6 mm) feeding tube.  
Easily disassembled for cleaning.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
99228		6 x 25	13 x 23 x 5	20 x 13 x 39	0,010	1,97	432	
91228		6	15,4 x 24 x 2,5	20 x 10 x 39	0,007	1,01	576	

**360° MICRO-MIST SPRAYER ON SPIKE****91229**

Micro-mist sprayer on spike.  
Ensures a soft and even irrigation over an area of 360°.  
Connected to the end of a 1/4" (4-6 mm) feeding tube.  
Easily anchored to the soil.  
Readily inspectable for easy cleaning.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91229		6	15,4 x 24 x 2,5	20 x 10 x 39	0,007	1,00	576	

**SELF-REGULATING DRIPPER ON SPIKE****91223****LIMITED STOCK**

Self-regulating dripper on spike.  
Constant 4 l/h flow rate at start and end of line.  
Ensures precise and localised irrigation at plant base.  
Connected to the end of the 1/4" (4-6 mm) feeding tube.  
Easily disassembled for cleaning.  
Rinse head under running water to clean.  
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
91223		6	15,4 x 24 x 2,5	20 x 10 x 39	0,007	1,00	576	

# RAINJET® KIT

RainJet kits include everything you need to set up a drip-irrigation system for your terrace or vegetable patch by yourself: main and feeding hoses, drippers, couplings and – for the timer kits – a battery-powered water timer. RainJet kits can be used to water between 20 and 60 plants, depending on the chosen solution, and they can be extended at any time with additional RainJet components. A highly practical solution that guarantees well-balanced irrigation!

DRIP IRRIGATION



## ORTO DRIP KIT

90767



This ready-to-use kit is the best solution for watering vegetable gardens, adjusting the flow and adapting it to the different plants needs.

This kit contains all the components for setting up 6 irrigation zones and watering up to 60 plants, with adjustable drippers (40 end-of-line and 20 shrubblers) and 25 m of main hose.



### CONTAINS

90365	Main tube 25 m	x 1	91086	1/2" End stopper	x 12
8627	3/4" Threaded tap connector	x 1	91090	1/2" Support stake	x 35
91009	Automatic coupling	x 1	91185	Hole puncher/spanner	x 1
91280	1/2" Shut-off valve	x 6	91170	Hole plugs	x 10
91081	1/2" Elbow coupling	x 7	91214	0-10 L/h plus end-of-line dripper	x 40
91071	1/2" Tee	x 11	91232	Adjustable shrubbler	x 20

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90767		1	40 x 40 x 12	40 x 40 x 12	0,019	3,50	54



## DRIP STARTER KIT

**90764**

Fully equipped for a 20-pot system, with adjustable drippers to adapt the water flow to each plant. Includes pressure reducer.

**CONTAINS**

<b>90370</b>	Feeding tube 20 m	x 1	<b>91217</b>	0-6 l/h in-line dripper	x 20
<b>91040</b>	Pressure reducer	x 1	<b>91270</b>	1/4" shut-off valve	x 3
<b>91141</b>	1/4" tee	x 5	<b>91345</b>	1/2" - 1/4" hose threaded adaptor	x 1
<b>91170</b>	Hole plugs	x 10	<b>91494</b>	3/4" automatic adaptor	x 1
<b>91190</b>	1/4" support stake	x 20			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90764		4	30 x 30,5 x 4,4	39 x 19 x 39	0,029	3,50	96	

## DRIP KIT PLUS 25 POTS

**90759**

Ready-to-use kit for optimum watering of plants on the terrace or in flowerbeds, adjusting the flow and adapting it to what the different plants need. Contains all the connections to make a drip irrigation system to water up to 25 plants with adjustable in-line Plus drippers and 25 m of feeding hose.

**CONTAINS**

<b>345073</b>	Feeding tube 25 m	x 1	<b>91218</b>	0-10 l/h in-line dripper	x 25
<b>91040</b>	Pressure reducer	x 1	<b>91270</b>	1/4" shut-off valve	x 3
<b>91141</b>	1/4" tee	x 5	<b>91345</b>	1/2" - 1/4" hose threaded adaptor	x 1
<b>91170</b>	Hole plugs	x 10	<b>91494</b>	3/4" automatic adaptor	x 1
<b>91190</b>	1/4" support stake	x 25			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90759		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,00	96	

## TIMER KIT 20 LOGICA

**90766**

Fully equipped for a 20-pot system, with adjustable drippers to adapt the water flow to each plant. Includes pressure reducer and Aquauno Logica tap timer, to automatically start watering at the best time of the day. Just turn the knob to select one of the 15 preset programmes.

**CONTAINS**

<b>8422</b>	Aquauno Logica	x 1	<b>91190</b>	1/4" support stake	x 20
<b>90370</b>	Feeding tube 20 m	x 1	<b>91217</b>	0-6 l/h in-line dripper	x 20
<b>91040</b>	Pressure reducer	x 1	<b>91270</b>	1/4" shut-off valve	x 3
<b>91141</b>	1/4" tee	x 5	<b>91345</b>	1/2" - 1/4" hose threaded adaptor	x 1
<b>91170</b>	Hole plugs	x 10	<b>91494</b>	3/4" automatic adaptor	x 1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90766		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,24	96	

## TIMER KIT 20 PRATICO



**90763**

Fully equipped for a 20-pot system, with adjustable drippers to adapt the flow of water to each plant. Includes pressure reducer and Aquauno Pratico tap timer to set automatic watering with daily frequency and maximum watering run time of 60 minutes.

**CONTAINS**

<b>8425</b>	Aquauno Pratico	x 1	<b>91190</b>	1/4" support stake	x 20
<b>90370</b>	1/4" feeding tube 20 m	x 1	<b>91217</b>	0-6 l/h in-line dripper	x 20
<b>91040</b>	Pressure reducer	x 1	<b>91270</b>	1/4" shut-off valve	x 3
<b>91141</b>	1/4" tee	x 5	<b>91345</b>	1/2" - 1/4" hose threaded adaptor	x 1
<b>91170</b>	Hole plugs	x 10	<b>91494</b>	3/4" automatic adaptor	x 1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90763		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,23	96	8 000625 907632



## TERRAZZO DRIP KIT

**90772**

Ready-to-use kit to water plants on terraces or flower beds, adjusting the flow according to the different requirements.

This kit contains all the components for setting up an irrigation system to water up to 50 plants, with adjustable drippers (30 in-line and 20 end-of-line), 25 m of main tube and 25 m of feeding tube.

**CONTAINS**

<b>90365</b>	Main tube 25 m	x 1	<b>91073</b>	1/2" - 1/4" 2 - way coupling	x 15
<b>345073</b>	1/4" feeding tube 25 m	x 1	<b>91086</b>	1/2" end stopper	x 1
<b>91002</b>	Multi-thread tap connector	x 1	<b>91090</b>	1/4" support stake	x 50
<b>91009</b>	Automatic coupling	x 1	<b>91218</b>	0-10 l/h plus in-line dripper	x 30
<b>91280</b>	1/2" shut-off valve	x 1	<b>91214</b>	0-10 l/h plus end-of-line dripper	x 20
<b>91081</b>	1/2" elbow coupling	x 5			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90772		1	40 x 40 x 12	40 x 40 x 12	0,019	3,43	54	8 000625 907724

# RAINJET® MICRO-SPRINKLERS

Claber micro-irrigation is inspired by soft spring rains: tiny droplets, precisely distributed, fall gently onto leaves, crops and flowers, even the most delicate ones, always delivering the optimum amount of water and preventing any waste. The micro-sprinklers are easy to install straight onto feeding hoses and main hoses, or onto suitable rods to raise them to the right height. RainJet micro-sprinklers, a gentle caress of water for healthier, more beautiful plants.



180° MICRO-SPRINKLER

Fine rain effect

ECO-COMPATIBLE MATERIALS  
MADE TO LAST

CALIBRATED WATERING  
WITH NO WASTE



## 360° MICRO-SPRINKLER

91256



Suitable for watering circular areas.  
For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.  
Irrigated area max. 16 m<sup>2</sup>.  
Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	22,0	34,0	46,0	52,0	72,0
Øm	3,0	3,5	4,5	4,0	4,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91256		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,38	1440



## 180° MICRO-SPRINKLER

91255



Suitable for watering semi-circular areas.  
For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.  
Irrigated area max. 10 m<sup>2</sup>.  
Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	59,0	61,0
r(m)	1,2	2,0	2,2	2,2	2,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91255		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,38	1440



## 90° MICRO-SPRINKLER

91254



Suitable for watering right-angled corners.  
For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.  
Irrigated area max. 8 m<sup>2</sup>.  
Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	59,0	61,0
r(m)	1,5	2,2	2,7	3,0	3,2

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91254		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,38	1440



## MICRO-SPRINKLER STRIP

91257



Used for watering rectangular strips.  
Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.  
Irrigated area max. 6,8 m<sup>2</sup>.  
Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	58,0	61,0
r(m)	3,2	5,5	7,2	8,5	9,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91257		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,39	1440



## 360° MICRO-MIST SPRAYER

91258



For light mist sprinkling.  
Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.  
Irrigated area max. 3 m<sup>2</sup>.  
Blister of 10 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	13,0	19,0	23,0	26,0	29,0
Øm	1,0	1,6	1,8	2,0	2,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91258		10	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,38	1440



**360° ADJUSTABLE  
MICRO-SPRINKLER****91249**

Suitable for watering circular areas. Used either directly into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation. Equipped with adjustment and shut-off valve.  
Irrigated area max. 16 m<sup>2</sup>. Blister of 5 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	22,0	34,0	46,0	52,0	72,0
Øm	3,0	3,5	4,5	4,0	4,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91249		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,41	1440

**180° ADJUSTABLE  
MICRO-SPRINKLER****91248**

Suitable for watering semi-circular areas. Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.  
Equipped with adjustment and shut-off valve.  
Irrigated area max. 10 m<sup>2</sup>. Blister of 5 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	59,0	61,0
r(m)	1,2	2,0	2,2	2,2	2,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91248		10	7,9 x 15,7 x 3,5	25 x 10 x 19	0,005	0,41	1440

**360° ADJUSTABLE  
MICRO-SPRINKLER****91250**

Suitable for watering circular areas. For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.  
Equipped with flow adjustment and shut-off valve.  
Irrigated area max. 57 m<sup>2</sup>. Blister of 5 pcs.

Bar	0,5	1,0	1,5	2,0	2,5
l/h	48,8	90,0	120,0	142,0	165
Øm	3,0	5,0	6,5	7,5	8,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91250		10	7,9 x 15,7 x 4,5	26,5 x 10 x 25	0,006	0,64	960

**MICRO-SPRINKLER SUPPORT  
STAKE****91265**

Used for overhead installation of micro sprinklers according to various plant heights.  
Adjustable height: 30 - 50 cm.  
Header bag of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91265		8	8 x 33 x 1,5	20 x 39 x 10	0,007	0,66	768

**FITTED RIGID RISERS****91260**

Allows to rise the micro-sprinklers and micro-sprayers at 30 cm.  
Screwed directly into the 1/2" (13-16 mm) main tube.  
Header bag of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
91260		10	8 x 33 x 1	20 x 39 x 10	0,007	0,99	960



# AQUA-MAGIC® SYSTEM

Plants and flowers enthusiasts do not always have a tap available to water their pots on their terrace or balcony. Claber has the answer to this frequent problem: Aqua-Magic System. This ready-to-use kit allows you to set up a drip irrigation system without needing to connect to the power or water mains. Everything you need comes in the kit: a special timer with a built-in pump and a photovoltaic panel, drippers and all the accessories for watering up to 20 pots. Aqua-Magic System can be used together with any standard water recipient or with the Aqua-Magic Tank, a special foldable tank that can hold up to 80 litres of water. It is easy to transport and assemble and takes up minimum space.

## AQUA-MAGIC® SYSTEM

The magic of water with no taps and no electrical power sockets.

PLENTY OF CAREFREE DAYS!  
USE WITH AQUA-MAGIC TANK  
OR ANY STANDARD WATER RECIPIENT



IDEAL FOR HANGING VEGETABLE  
GARDENS AND FLOWERING PLANTS,  
EVEN ON DIFFERENT LEVELS



POWERED BY SUNLIGHT THANKS TO  
THE PHOTOVOLTAIC PANEL  
THAT RECHARGES THE BATTERIES

WEBSITE



QUICK AND EASY TO PROGRAMME  
WITH TWO CONVENIENT DIALS



## AQUA-MAGIC SYSTEM

**8063**

Independent ready-to-use drip kit. It includes timer, photovoltaic panel and built-in pump to draw water from a tank, filter and deliver it to 20 drippers.

Inspectable filter for easy cleaning.

The photovoltaic panel absorbs the light energy and turns it into electrical energy which is accumulated in 2 rechargeable AA 1.2V NiMH 1800mAh batteries (not included).

A specific led reports the battery level. 54 possible irrigation solutions, which can be set with just 2 rotating knobs: one with the frequencies (between 1 and 7 days), the other with the amount of water that you wish to deliver with each dripper (between 40ml and 200ml). Optional manual irrigation: 100ml per dripper (the programme remains stored).

It can be used with any tank.

The kit contains:

- 1 solar timer-pump
- 1 anti-siphon flow blocking valve at the end of irrigation
- 1/4" suction filter
- 1 bracket with screws and plugs for wall-mounting
- 20 self-regulating drippers
- 20m of 1/4" (4-6 mm) feeding tube
- 20 1/4" support stakes
- 5 1/4" 3-way couplings
- 6 hole plugs

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8063		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,26	108	

## AQUA-MAGIC TANK

**8061**

Folding tank with a capacity of 80 litres for Aqua-Magic System (code 8063).

Easy assembly with polypropylene sleeves.

Sturdy and stable thanks to the easy-to-assemble aluminium frame with special anti-scratch covering. Equipped with a special coupling bar to position Aqua-Magic System.

Dimensions when open: 40 x 40 x 85 cm.

At the end of the season, it can be tidely stored, taking up minimum space.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8061		1	47 x 13 x 56	47 x 56 x 13	0,034	3,15	28	

## SPARE DRIPPERS

**8064**

Spare in-line Aqua-Magic drippers for localised irrigation.  
Pack of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8064		10	8 x 10 x 2,5	13 x 10 x 19	0,002	0,32	2880	

## 10 m HOSE 1/4" (4-6 mm)

**8068**

10 m coil of spare feeding tube, 1/4" (4-6 mm) diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8068		4	20 x 4 x 20	23,7 x 17,5 x 16,5	0,007	0,95	504	

# INDOOR PLANTS

House plants make our homes more beautiful but they need the right care: moderate watering that's steady, with no long breaks, and without over-watering.

Claber has designed a range of solutions for house plants, that suit all situations.

Systems that don't need to be connected to a tap and that water plants every day with the right amount of water, guaranteeing up to 28 days of complete autonomy: with Claber it's easy to surround yourself with green delights, even at home.



## IDRIS® SPIKE

Individual pot watering that's autonomous and perfectly calibrated

## AQUALUX® SYSTEM

The best system for watering up to 20 pots daily without a tap

## OASIS® EVOLUTION

The definitive watering solution for when you're out or on holiday

# IDRIS® SPIKE

Idris Spike is the exclusive sprinkler designed to water pot plants steadily and with the right amount of water. It's the ideal solution for when you are away from home for a long period, but it is also useful when you are at home. It guarantees your plants' well-being, without you needing to water them by hand.

You can use any normal plastic bottle with Idris Spike and you do not need to connect it to the power mains. It guarantees up to 20 days of autonomous watering. Made from a tough plastic material that is resistant to knocks and limescale, complete with drippers with different flow rates, and designed to be ultra-sturdy, Idris Spike is ideal for all plants: at home, on the balcony and in the office.



DRIP IRRIGATION

## IDRIS SPIKE

8052



Automatic dripper for pot plants. Conical connector suitable for standard plastic bottles up to 2 litres. Supplied complete with 2 nozzles, rated 10 and 15 cl. The spike is anchored into the soil, near the plant roots. Inspectable and washable under running water.

	0,5 L	1 L	1,5 L	2 L	
10 cl	5	10	15	20	days
15 cl	3	6	10	13	days

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8052		12	7,9 x 24 x 3,7	28 x 19 x 25	0,013	1,16	576	8 000625 080526



# OASIS® EVOLUTION

With no need of a tap or an electrical power supply, Oasis Evolution enables you to water up to 20 pots for several days. All you have to do is set up a simple drip-irrigation line using the drippers and accessories provided.

There is a handy dial for viewing and selecting 1 of the 4 different watering programmes displayed on the backlit screen. Delayed starts are also possible.

Perfect for watering house plants when you go on holiday.



## OASIS EVOLUTION

8054



Fully independent water-distributor, ready to use in few minutes and extremely compact. No need of connections to a tap or power mains. Oasis Evolution contains 25 litres of water and provides waste-free drip irrigation for up to 20 pots running on a daily cycle. Four different programmes (7, 14, 21, 28 days of autonomy), selected with a simple dial. Start button to start the programme immediately or with a delay of up to 23 hours. The backlit LCD display shows the selected programme, duration of the irrigation cycle in progress, any programmed delay, and the time remaining until the next irrigation cycle. Compact, elegant design that overlooks no detail. Operated by 2 x AA 1.5 V batteries (not included). Supplied with 10 metres of PVC feeding hose, 20 drippers and 20 hose stakes.



### PROGRAMME TABLE

PROGRAMME	ml PER DRIPPER
7 days	145 ml
14 days	70 ml
21 days	45 ml
28 days	35 ml



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8054		1	36,5 x 32 x 36	37 x 37 x 34	0,047	3,50	18



# AQUALUX® SYSTEM

Aqualux System is the new versatile system by Claber, for watering potted plants every day without the need of a connection to a tap.

Aqualux can be assembled in just a few minutes and guarantees up to 4 weeks of autonomy, thanks to its large 30-litre tank.

The integrated electric pump operates an irrigation system with fixed-flow drippers, which can water up to 20 pots.

There are 4 different programmes to choose from with a practical dial, the option to delay the start and a backlit display that makes programming simple and accurate.

The power supply system is innovative, with a USB adaptor to connect to the mains, or 2 x AA rechargeable batteries that guarantee operation for the full duration of the programme, even when there is no electrical power supply.

A versatile, reliable and easy-to-use solution to create a true drip irrigation system.



WEBSITE



## AQUALUX® SYSTEM

8062



Water distributor with integrated timer and pump to create a drip irrigation system for up to 20 pots. Suitable for house plants as well as for sheltered terraces and balconies.

The system can be powered electrically by a USB adaptor (included), or 2 rechargeable AA 1.2V NiMH batteries, min. 2400 mAh (not supplied).

Foldable water tank in thick PVC, 30-litre capacity.

Handy opening at the top for filling. No tools required to assemble the upright supports.

Four different programmes (7, 14, 21, 28 days of autonomy), selected with a simple dial.

Start button to start the programme immediately or with a delay of up to 23 hours.

The backlit LCD display shows the selected programme, the duration of the watering cycle in progress, any programmed delay and the time remaining until the next irrigation cycle.

Contains:

- 20 metres of PVC feeding hose
- 20 drippers
- 20 hose stakes
- 5 tees
- 6 end-of-line plugs.

### PROGRAMME TABLE


PROGRAMME	ml PER DRIPPER
7 days	200 ml
14 days	100 ml
21 days	65 ml
28 days	50 ml

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8062		1	40 x 40 x 20	40 x 40 x 20	0,032	3,60	24



					
<b>CODE</b>	<b>8052</b>	<b>90764</b>	<b>90759</b>	<b>90763</b>	<b>90766</b>
<b>DESCRIPTION</b>	Ildris Spike	Kit Drip 20 pots	Kit Drip Plus 25 pots	Timer Kit 20 Pratico	Timer Kit 20 Logica
<b>Contents</b>	 <b>1 MAX</b>	 <b>20 MAX</b>	 <b>25 MAX</b>	 <b>20 MAX</b>	 <b>20 MAX</b>
<b>Water supply</b>	 <b>0,5 - 2l</b>				
<b>Ideal for</b>	Indoor plants	Outdoor pot plants	Outdoor pot plants	Outdoor pot plants	Outdoor pot plants
<b>Extendable</b>	no	yes	no	yes	yes
<b>Electric power supply</b>	-	-	-	<b>1 x</b>  <b>9V</b> ALKALINE	<b>1 x</b>  <b>9V</b> ALKALINE
<b>Timer included</b>	-	no	no	yes, Aquauno Pratico (8425)	yes, Aquauno Logica (8422)
<b>LCD screen</b>	-	-	-	no	no
<b>Method of programming</b>	-	-	-	buttons	rotary knob
<b>Days of autonomy</b>	max 20 (with 2 l bottle)	-	-	-	-
<b>Watering frequency</b>	1 per day	as you wish, depending on the timer used	as you wish, depending on the timer used	1 per day	from 2 per day to 1 per week
<b>Delayed start</b>	no	possible, depending on the timer used	possible, depending on the timer used	no	no
<b>Drippers provided</b>					
<b>Type of dripper</b>	interchangeable, with fixed flow rate	adjustable 0-6 l/hr	adjustable 0-10 l/hr	adjustable 0-6 l/hr	adjustable 0-6 l/hr
<b>Hose supplied</b>					

				
<b>90767</b>	<b>90772</b>	<b>8063</b>	<b>8054</b>	<b>8062</b>
Orto drip kit	Terrazzo drip kit	Aqua-Magic System	Oasis Evolution	Aqualux System
				
<b>60 MAX</b>	<b>50 MAX</b>	<b>20 MAX</b>	<b>20 MAX</b>	<b>20 MAX</b>
				
Vegetable patches	Outdoor pot plants	Outdoor pot plants	Indoor plants	Indoor and outdoor plants
no	no	no	no	no
-	-	photovoltaic panel and <b>2 x</b>  <b>HR6/AA</b> 1,2V NiMH ALKALINE min. 1800 mAh batteries	<b>2 x</b>  <b>AA</b> 1,5V ALKALINE	power supply unit with USB socket or <b>2 x</b>  <b>HR6/AA</b> 1,2V NiMH ALKALINE min. 2400 mAh batteries
no	no	yes	yes	yes
-	-	no	yes	yes
-	-	2 rotary knobs	rotary knob	rotary knob
-	-	variable, depending on tank used	max 28	max 28
as you wish, depending on the timer used	as you wish, depending on the timer used	from 1 per day to 1 per week	1 per day	1 per day
possible, depending on the timer used	possible, depending on the timer used	yes, by setting the watering frequency every day +6 hours	yes, up to 23 hours	yes, up to 23 hours
				
adjustable 0-10 l/hr (91214) and 0-40 l/hr (91232)	adjustable 0-10 l/hr	with fixed flow rate	with fixed flow rate	with fixed flow rate
				

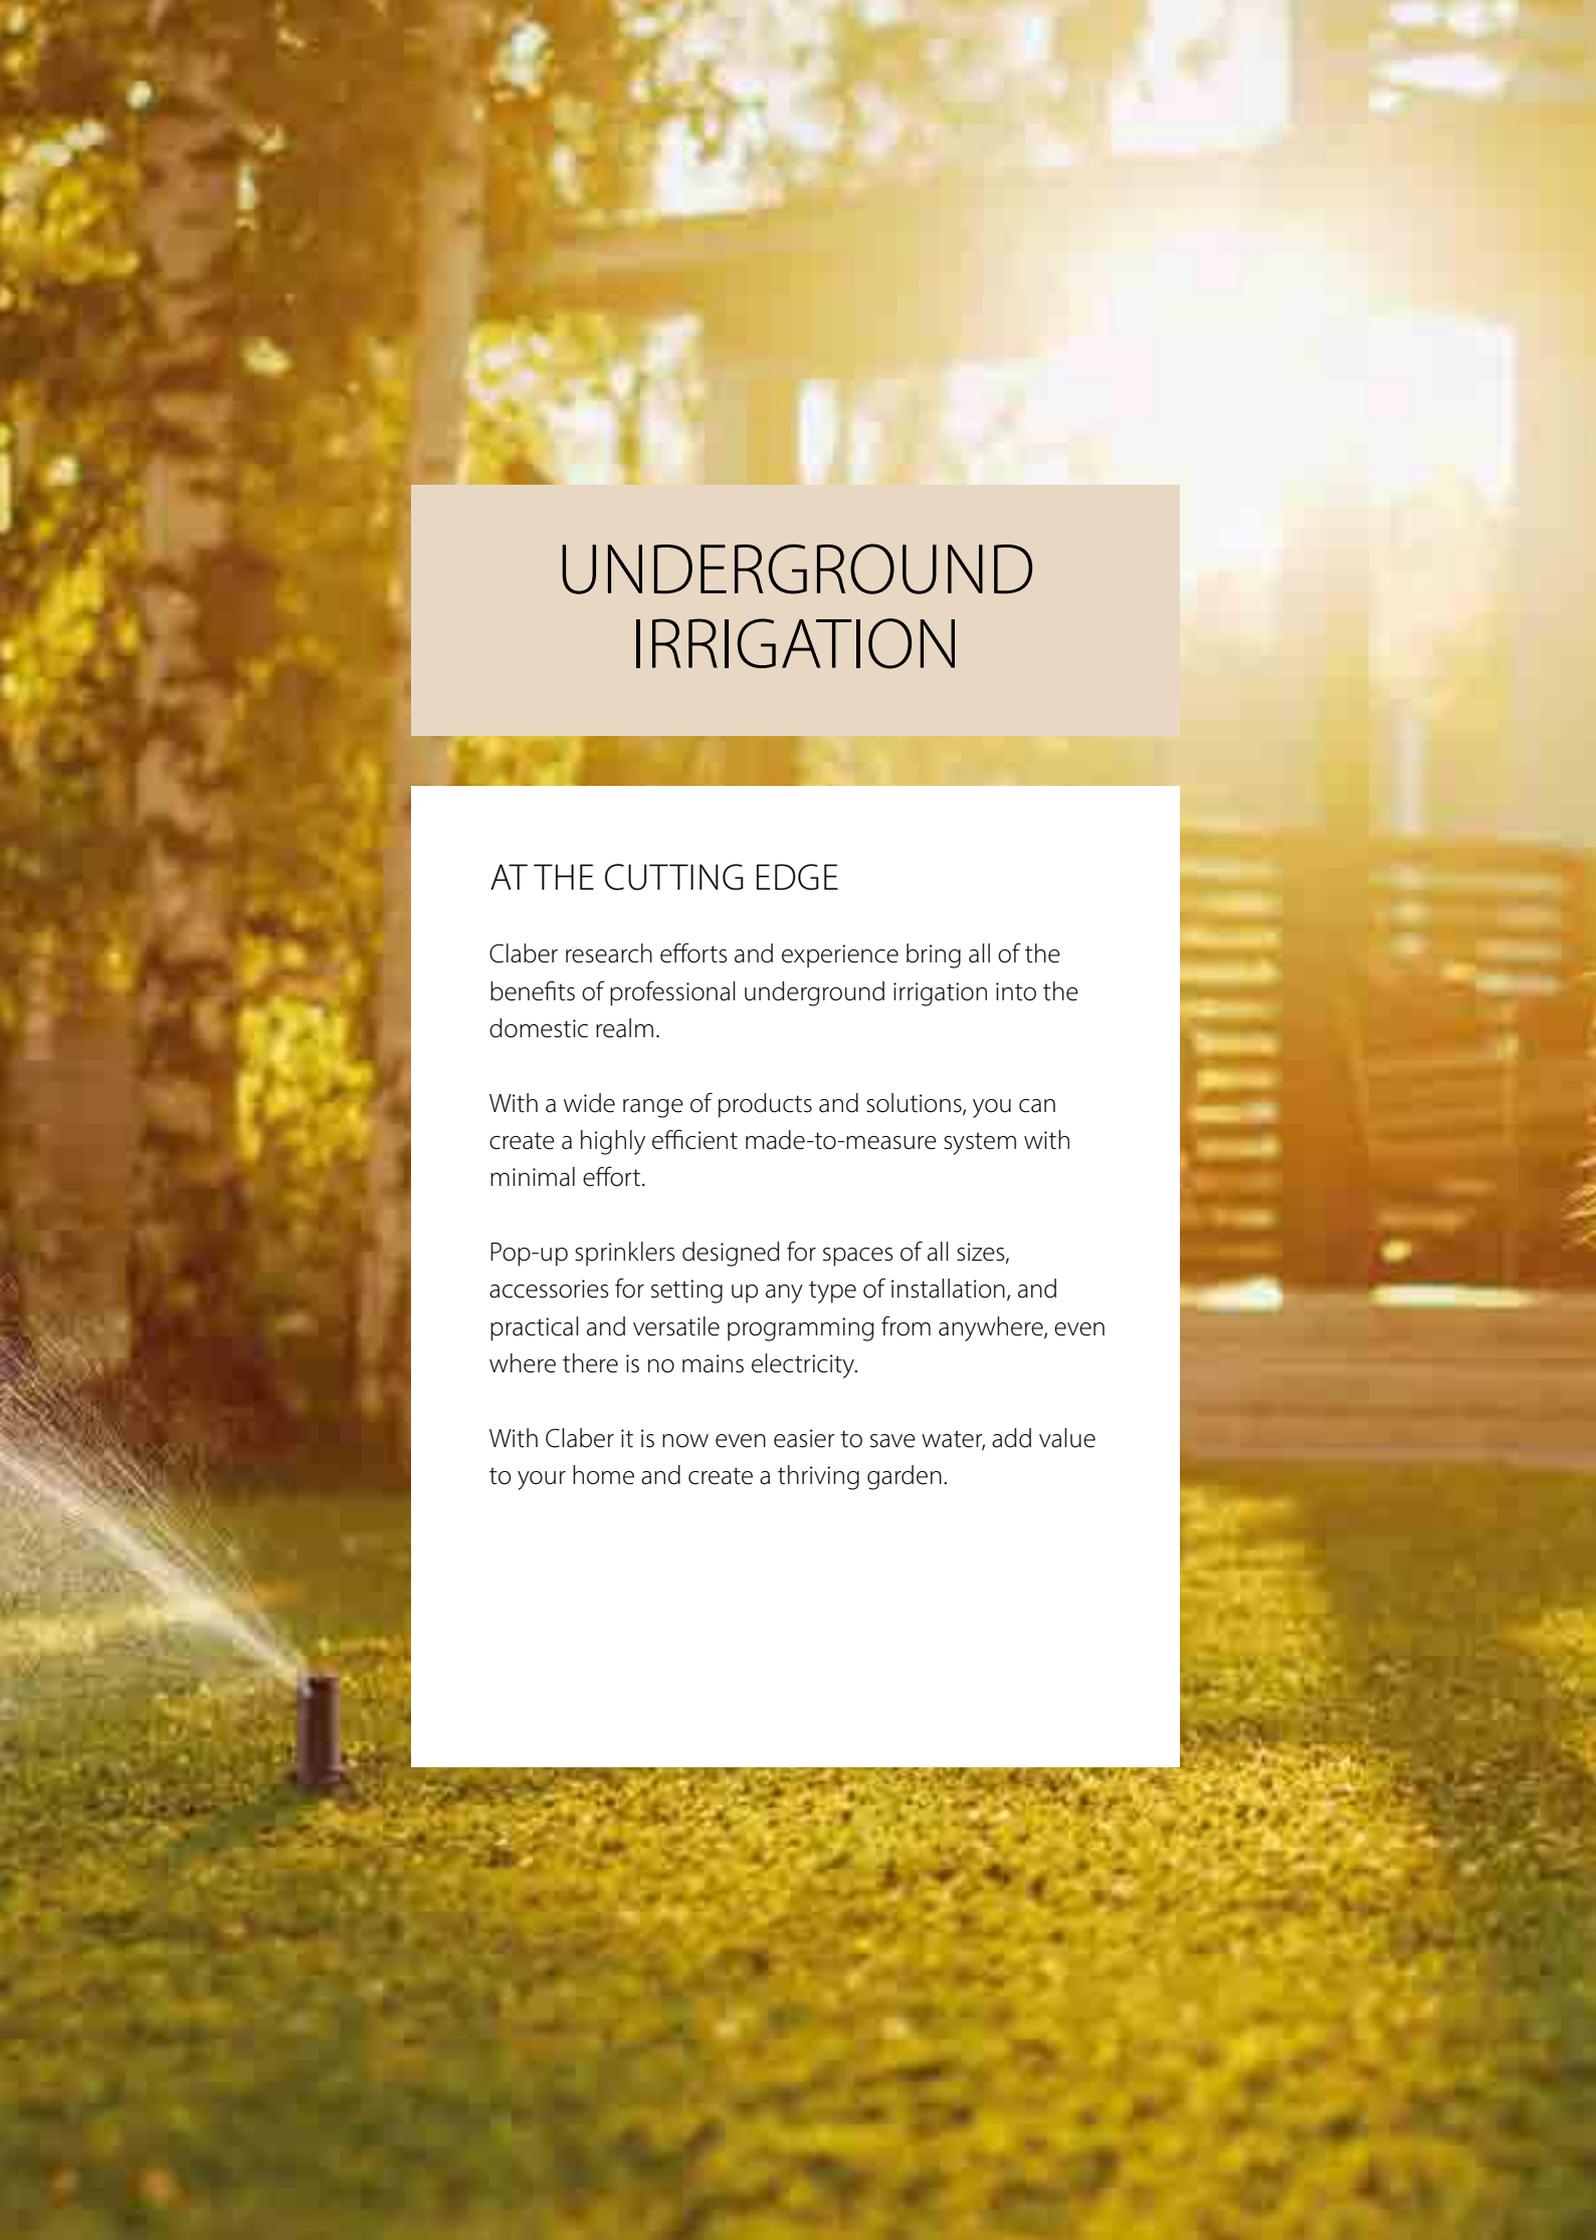A pop-up sprinkler is shown in the lower-left corner, spraying water onto a green lawn. The background is a blurred garden scene with trees and a building, bathed in warm, golden light.

# UNDERGROUND IRRIGATION

## AT THE CUTTING EDGE

Claber research efforts and experience bring all of the benefits of professional underground irrigation into the domestic realm.

With a wide range of products and solutions, you can create a highly efficient made-to-measure system with minimal effort.

Pop-up sprinklers designed for spaces of all sizes, accessories for setting up any type of installation, and practical and versatile programming from anywhere, even where there is no mains electricity.

With Claber it is now even easier to save water, add value to your home and create a thriving garden.



Keep your garden green even during the scorching summer months.

Choose a high-performing automated solution.



#### MASTERFUL IRRIGATION, AVAILABLE TO ALL

Pop-up sprinklers bring professional quality and performance to any garden. This wide range of sprinklers with an easy-to-adjust jet allow you to water just where is needed, for a perfectly kept garden with no wasted water.



#### SMART INNOVATION

More tech, more flexibility, less hassle. The innovative timers and control units by Claber allow you to manage any garden installation, from the smallest to the largest.



#### A TECHNOLOGICAL HUB IN YOUR GARDEN

A rich technology hub to help you manage small and large gardens alike, Hydro-4 holds a timer and 4 solenoid valves in a small valve box, serving up to four independent irrigation lines.




## THE FRONTIER OF INNOVATION

Claber has made underground irrigation simple. Hi-tech, efficient products designed even for inexperienced hands mean no one has to miss out on the outstanding performance of an automated system. And your garden will always be a beautiful green oasis.



# COLIBRÌ® SYSTEM

With the Colibrì System, Claber brings all of the advantages of underground irrigation into small green spaces too! It is easy to use, saves on water, keeps your lawn and plants looking good and healthy, and makes the most of your garden. Colibrì is easy to install, with no need to dig large holes or connect up to the power mains. All you need is one of Claber's battery-powered timers connected to the tap to make sure your garden has just the right amount of water at the right time, even when you are away or on holiday. And with the new jet adjustment, you just need two fingers for perfect, targeted irrigation with no waste!

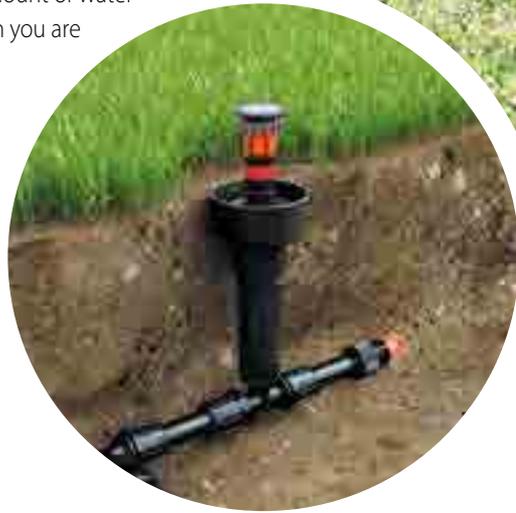

## COLIBRÌ SYSTEM

Underground irrigation  
for small gardens

GEAR-DRIVEN TURBINE  
WITH JET-INTERCEPTING HEAD

BODY AND ROD  
IN SHOCKPROOF ABS

EXTERNAL JET ADJUSTMENT  
WITH JUST TWO FINGERS

WASHABLE FILTER

STAINLESS STEEL RETURN SPRING

NON-SPILL RUBBER VALVE  
WITH FROST-RESISTANT  
DEVICE



INFO



360° COLIBRÌ MICRO-SPRINKLER

**90210**



180° COLIBRÌ MICRO-SPRINKLER

**90220**



90° COLIBRÌ MICRO-SPRINKLER

**90230**



Underground micro-sprinkler with low water consumption. Ideal for watering vegetable patches and small gardens, even at low pressure. Gear-driven device made from acetal resin. External adjustment of range.

Height from ground: 2" (5 cm).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90210		12	4 x 14,3 x 4	23,7 x 16,5 x 17,5	0,007	1,10	1512	8 000625 90210 1
90220		12	4 x 14,3 x 4	23,7 x 16,5 x 17,5	0,007	1,10	1512	8 000625 90220 0
90230		12	4 x 14,3 x 4	23,7 x 16,5 x 17,5	0,007	1,10	1512	8 000625 90230 9

90210

360°			r	
BAR	l/min	m <sup>2</sup>		
1,5	4,0	38,5	r 3,5 m	5,0 m
2,0	4,5	50,2	r 4,0 m	5,7 m
3,0	5,1	63,6	r 4,5 m	6,4 m

90220

180°			r	
BAR	l/min	m <sup>2</sup>		
1,5	2,9	25,1	r 4,0 m	5,7 m
2,0	3,3	31,8	r 4,5 m	6,4 m
3,0	3,6	34,7	r 4,7 m	6,7 m

90230

90°			r	
BAR	l/min	m <sup>2</sup>		
1,5	1,7	9,6	r 3,5 m	5,0 m
2,0	2,0	13,8	r 4,2 m	6,0 m
3,0	2,1	13,8	r 4,2 m	6,0 m


GUARD COLLAR

**90250**



For optimum installation of Colibri micro-sprinklers. Traps sand and pebbles from the soil.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90250		10	8 x 6,5 x 3,5	10 x 13 x 39	0,005	0,30	1200	8 000625 90250 7

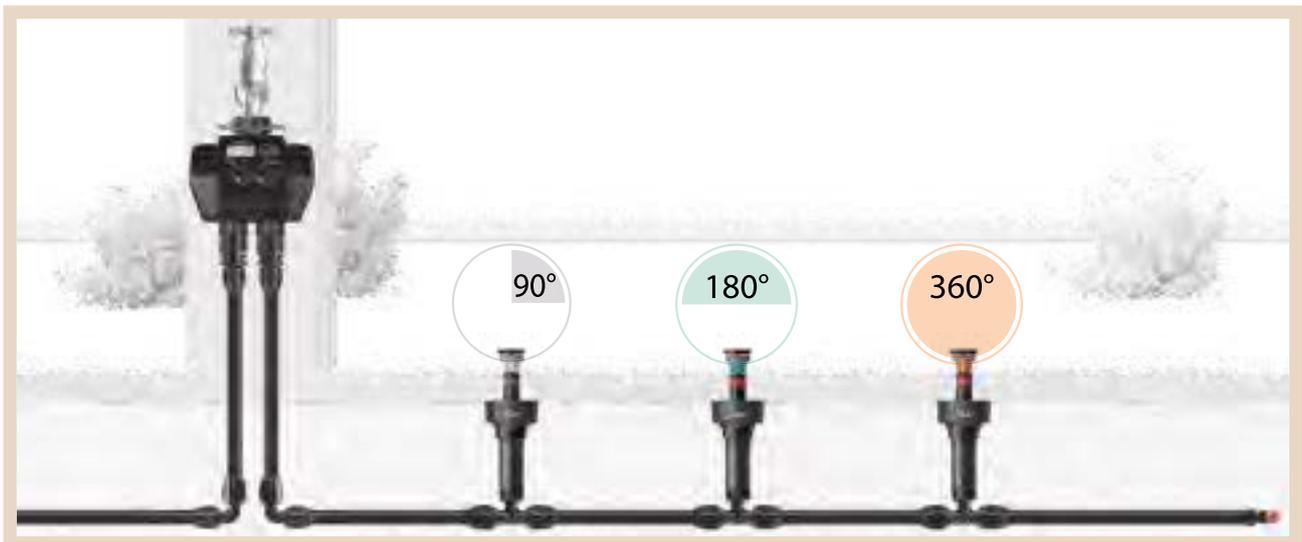

## COLIBRÌ STARTER KIT

## 90200



Starter kit for an underground watering system for 50 m<sup>2</sup> garden, complete with Colibrì System micro-sprinklers. Additional micro-sprinklers and Colibrì System accessories are also available as required (regular shape gardens, max 200 m<sup>2</sup>). The compact colour packaging features easy assembly instructions of all kit components.


## CONTAINS

<b>3291</b>	Main tube 25 m	x 1	<b>91072</b>	1/2" (15-21 mm) threaded 3 - way connector	x 3
<b>91347</b>	1/2" hose threaded adaptor	x 1	<b>90920</b>	Threaded drainage valve	x 1
<b>91494</b>	3/4" automatic adaptor	x 1	<b>90210</b>	360° - 2" micro-sprinkler	x 1
<b>91081</b>	1/2" elbow coupling	x 5	<b>90220</b>	180° - 2" micro-sprinkler	x 4
<b>91071</b>	1/2" tee	x 2	<b>91096</b>	Tube clamp	x 24
<b>91082</b>	1/2" (15-21 mm) threaded elbow	x 2	<b>90250</b>	Guard collars	x 5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90200		1	40 x 40 x 12	40 x 40 x 12	0,019	2,70	54



## EXAMPLE OF SYSTEM WITH THE COLIBRÌ STARTER KIT

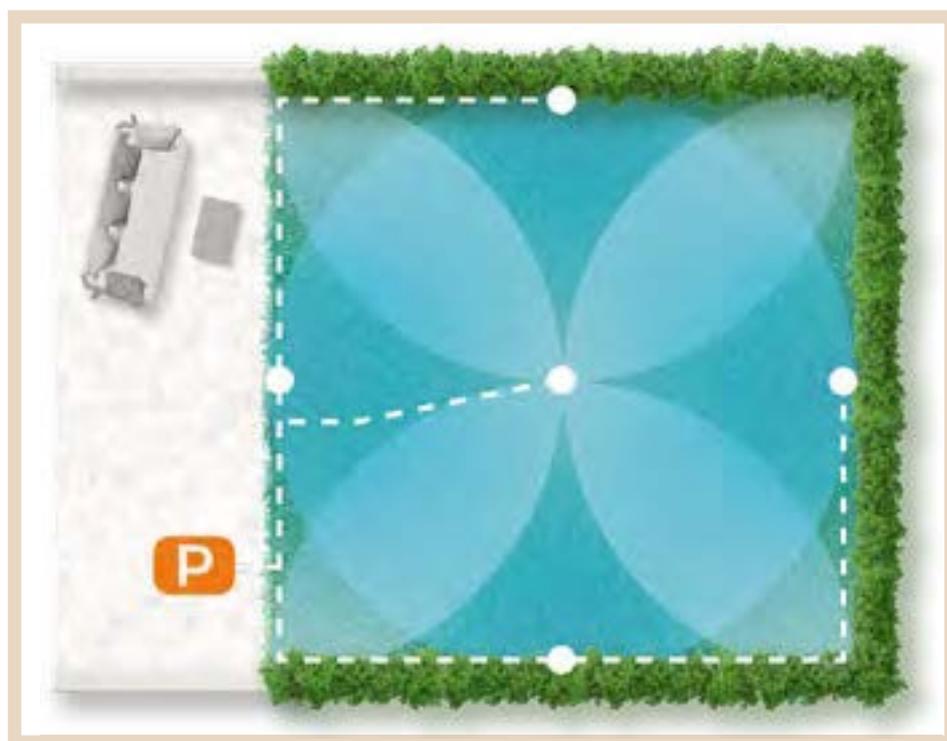

## MAIN REQUIREMENTS:

- Pressure: minimum 2.5 bars
- Flow rate: at least 21 l/min
- Garden shape: regular (square or slightly rectangular; e.g. 7 x 7 m, 8 x 7 m, 8 x 8 m)
- Water supply: water mains

## FEATURES:

- The kit comes with fixed angle sprinklers (1 x 360°, 4 x 180°)
- Colibrì sprinklers have a jet of min. 3.5 m - max. 4.5 m
- The area behind the sprinklers is also watered for about 25-30 cm.



The underground micro-irrigation system created with the Colibrì Starter Kit can easily be automated by using a Claber one-way tap timer (Aquauno, Aquauno Plus and Tempo, from page 88).



TURBO-JET 80°-360° - 3"

90264



**LIMITED STOCK**



80°-360°

Dynamic pop-up sprinkler featuring low water consumption. Ideal for small gardens, even with low water pressure. Special internal gear mechanism rotating at constant speed, guaranteeing balanced watering. Working arc adjustable from 80° to 360°. Jet range adjustable by turning the ring nut. Inspectable and washable filter. Standard 1/2" (15-21 mm) threaded base. Height from ground 3" (cm 7,5).

BAR	90°		180°		360°				
	l/min	r	l/min	r	l/min	r			
1,5	1,48	4,0	4,8 m	2,56	3,5	4,2 m	4,67	3,6	4,3 m
2,0	1,73	4,5	5,4 m	2,85	4,5	5,4 m	5,27	4,25	5,1 m
3,0	2,07	5,25	6,3 m	3,46	5,0	6,0 m	6,41	5,0	6,0 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90264		12	5,1 x 14 x 5,1	10 x 13 x 39	0,005	1,10	1440	8 000625 902644

TURBO-JET 80°-360° - 4"

90266



80°-360°

Dynamic pop-up sprinkler featuring low water consumption. Ideal for small gardens, even with low water pressure. Special internal gear mechanism rotating at constant speed, guaranteeing balanced watering. Working arc adjustable from 80° to 360°. Jet range adjustable by turning the ring nut. Inspectable and washable filter. Standard 1/2" (15-21 mm) threaded base. Height from ground 4" (cm 10).

BAR	90°		180°		360°				
	l/min	r	l/min	r	l/min	r			
1,5	1,48	4,0	4,8 m	2,56	3,5	4,2 m	4,67	3,6	4,3 m
2,0	1,73	4,5	5,4 m	2,85	4,5	5,4 m	5,27	4,25	5,1 m
3,0	2,07	5,25	6,3 m	3,46	5,0	6,0 m	6,41	5,0	6,0 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90266		12	5,1 x 14 x 5,1	10 x 13 x 39	0,005	1,16	1440	8 000625 902668



# MULTIPLA TIMERS

Multipla timers are the perfect synthesis of technology, design, ease of use and versatility, with the option to choose from different preset programmes on 6 independent lines, simply by turning a dial.

The large LCD display shows how many minutes remain until the next irrigation cycle and the countdown for the irrigation cycle in progress.

Multipla is made of materials resistant to humidity, UV rays and weathering, and comes in two versions: with a 24 V transformer or operated by a 9 V alkaline battery, which lasts for the whole season.

Multipla brings underground irrigation to areas without mains electricity connections.



## MULTIPLA AC 230/24 V LCD

**8058**


Easy-to-program 6-line electronic timer: just turn the 6 dials to set the required irrigation schedule: 5 - 10 - 15 - 20 - 30 - 60 minutes.

There is a frequency control for selecting the repetition of the watering programme at predefined intervals: 8h - 12h - 24h - 2 days - 3 days - 4 days - 7 days.

There is a start button for immediate activation of the programme or the manual function for the system test phase - "start + ... hours" button for a 23-hour delay in activation of the programme.

An intermittent LED system indicates valve opening.

A safety timer delays valve opening by 5 seconds. Pump control. 9 V buffer battery.

External 220 - 24 V transformer included.

Compliant with CE standards.

Designed for direct connection to the Rain Sensor.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8058		1	22 x 22 x 12,5	22 x 22 x 12,5	0,004	1,42	84	

## MULTIPLA DC 9 V LCD

**8060**


Easy-to-program 6-line electronic timer: just turn the 6 dials to set the required irrigation schedule: 5 - 10 - 15 - 20 - 30 - 60 minutes.

There is a frequency control for selecting the repetition of the watering programme at predefined intervals: 8h - 12h - 24h - 2 days - 3 days - 4 days - 7 days.

There is a start button for immediate activation of the programme or the manual function for the system test phase - "start + ... hours" button for a 23-hour delay in activation of the programme.

An intermittent LED system indicates valve opening.

A safety timer delays valve opening by 5 seconds.

Powered by two 9 V alkaline batteries, sufficient for an entire season.

Compliant with CE standards.

Designed for direct connection to the Rain Sensor.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
8060		1	22 x 22 x 7,5	22 x 22 x 7,5	0,004	0,88	144	

# AQUA-HOME

Aqua-Home is the underground irrigation timer designed to guarantee professional performance in any type of garden. With its compact and elegant design, it is easy to install and use; it is equipped with a large LCD display, 4 buttons and a dial to manage watering on up to 8 lines. What's more, it is innovative and ultra reliable! Instead of a traditional buffer battery it has a super capacitor (SuperCap). SuperCap stores enough energy to keep the timer settings stored if the power supply is temporarily interrupted.



INFO



## AQUA-HOME

**8022**



A timer for up to 8 watering lines that is easy to install and use, with a dial, 4 buttons and a large LCD display which makes the set data easy to read. The watering duration can be set (from 1 minute to 4 hours and 15 minutes) for each line, with two independent watering cycles and up to 4 daily starts per cycle. Offering useful functions such as setting the irrigation frequency (weekly, cyclical from 1 to 12 days, even/odd days), Water Budget to change watering from between 0% and 200%, Rain-Stop when it rains. Manual irrigation is also possible and can be customised between 5 minutes and 4 hours and 15 minutes. Aqua-Home is equipped with an internal capacitor (SuperCap), which stores energy when the timer is operating normally. This means it retains the timer settings, should the electrical power supply temporarily fail (saved in the memory for up to 2 days). Irrigation can also be set to semi-automatic. 230 V AC external transformer included. Designed for direct connection to the Rain Sensor (90915).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
8022		1	22 x 22 x 7,5	22 x 22 x 7,5	0,004	0,93	144	8 000625 080229

## RAIN SENSOR

**90915**



The rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining. When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts down. Programmed watering automatically resumes when the water in the sensor evaporates. The rain sensor should be installed in an outdoor area exposed to rain using the stainless steel bracket provided.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90915		2	8,5 x 11 x 20,5	25 x 10 x 19	0,005	0,64	288	8 000625 909155

# HYDRO-4®

WEBSITE



Modern lifestyles and ways of living are reflected in a steady move towards small- and medium-sized gardens. When it comes to watering these green spaces, Claber has come up with the answer: Hydro-4. A single watertight valve box with built-in battery-powered timer and 4 solenoid valves, ready for quick DIY installation. HYDRO-4 can be installed above-ground or underground and controls up to 4 underground, drip or above-ground irrigation lines for your lawn, flowerbed or vegetable patch. Unparalleled versatility! Hydro-4 is IP68 certified and set up for a cableless connection with the RF Rain Sensor.



## HYDRO-4

Irrigation made to measure



SIMPLE PROGRAMMING  
JUST 3 BUTTONS

NO ELECTRICAL CONNECTIONS,  
IDEAL AS A DIY PROJECT

A SINGLE SOLUTION  
4 IRRIGATION LINES





PRACTICAL AND VERSATILE  
FOR GARDENS UP TO 700 m<sup>2</sup>

COMPATIBLE WITH UNDERGROUND,  
ABOVE-GROUND AND DRIP IRRIGATION

## HYDRO-4

90829



Preassembled valve box incorporating 4 solenoid and a timer.  
Power provided by two 1.5 V AAA batteries, enough to last an entire season.  
On/off control for up to 4 independent underground or drip irrigation lines.  
Easy programming procedure, using just 3 buttons and a large size display.  
Watering time 1 to 60 minutes. 2 programs for each outlet, up to 8 watering cycles per day.  
Weekly setting, allowing exclusion of single days.  
Manual test of 5 minutes duration, variable in the same way as for watering times.  
A perfectly sealed IP 68 unit.  
Protective cover and buttons in bi-material rubber.  
Facility of viewing and deleting programs entered for each line.  
3/4" M (20-27 mm) connections on both inlet and outlet sides.  
Wireless connection to radio frequency Rain Sensor.  
5 threaded caps provided for unused outlets.  
4 solenoids valves.

Watering line flow rates: max 25 l/min at 2,5 bar.  
Operating pressure: min 1 - max 6 bar.  
Operating temperature: 3 - 60 °C.  
Dimensions: diameter 200 - height 153 mm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90829		1	25 x 23 x 17	25 x 23 x 17	0,010	2,50	60	8 000625 908295

## RF RAIN SENSOR

90831



Rain sensor operating on radio frequency. Suspends watering in case of rainfall.  
Dialogues with Tempo, Dual timers and Hydro-4.  
The RF Rain Sensor is designed for open air installation, exposed to rainfall, using a special stainless steel bracket supplied with the product. No electrical connections are required: RF coverage up to 30 m. Powered by 2 x 1.5 V AA alkaline batteries.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90831		1	8,5 x 20,5 x 11	8,5 x 20,5 x 11	0,002	0,23	288	8 000625 908318

# PROGRAMMABLE UNITS

The programmable solenoid valve is a practical and reliable solution for programming irrigation systems without an electrical power supply.

As an alternative to valve box installation, there is a control unit powered by a 9 V alkaline battery, which allows you to open and close individual solenoid valves from the outside.

The removable control units are also designed to guarantee IP 68 grade protection, the highest rating against water, solids and dust.



## CONTROL UNIT

**90821**



From a field station, the unit will pilot the opening and closing movements of one or two 9 V bistable solenoid valves installed in valve boxes.  
 Protected by 100% sealed cover operates also in total submersion.  
 Easy to program with three keys only. Irrigation time from 1 min to 23 h. 59 min.  
 With option of up to 6 irrigation cycles per day.  
 Manual and weekly programming with exclusion of specific weekdays as required.  
 Connected to a rain sensor (code 90915), the unit will suspend watering operations in the event of rainfall greater than 5mm per square metre.  
 Operates with a 9 V battery, sufficient for an entire season.  
 The control unit can be wall-mounted, using a special bracket, for ease of programming and practical maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90821		1	11 x 11,5 x 19,5	11 x 19,5 x 11,5	0,002	0,58	240	

## 1" (26-34 mm) F. PROGRAMMABLE SOLENOID VALVE

**90826**



Can be installed directly on the tap or water well outlet. Protected by 100% sealed cover operates also in total submersion.  
 Easy to program with three keys only.  
 Irrigation time from 1 min to 23 h. 59 min.  
 With option of up to 6 irrigation cycles per day.  
 Manual and weekly programming with exclusion of specific weekdays as required.  
 Bistable 9 V solenoid with low power consumption.  
 Operates with a 9 V battery, sufficient for an entire season.  
 Electronic section separable from hydraulic section for easy programming or storage during winter.  
 Operating pressure from 0,5 to 12 bar. 1" (26-34 mm) female inlet and outlet thread.  
 Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90826		1	18,7 x 19,5 x 11	18 x 19 x 10,5	0,003	0,88	144	

# SOLENOID VALVES

This range of solenoid valves is reliable and long-lasting, thanks to the materials they are made of: metal parts are made of stainless steel and the body of nylon reinforced with glass fibre. 100% tried and tested, even at high pressure, they feature a manual opening/shut-off and solenoid rotation control. With a slow shut-off device to prevent pressure shock, solenoid valves have an operating pressure of 0.5-12 bar. Thanks to the solenoid fitted with an anti-sand filter, which collects the impurities in the water and filters them from the irrigation circuit, Claber solenoid valves are top of the range.

## 9 V - 1" (26-34 mm) FEMALE SOLENOID VALVE

**90812**



Solenoid valve equipped with solenoid with anti-sand filter. Works with the Multipla 9V timer (cod. 8060) or with the 9V control unit (cod. 90821). With 1" (26-34 mm) female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90812		1	13 x 16 x 8	13 x 16 x 8	0,002	0,40	432



## 9 V - 1" (26-34 mm) MALE SOLENOID VALVE

**90813**



Solenoid valve equipped with solenoid with anti-sand filter. Works with the Multipla 9V timer (cod. 8060) or with the 9V control unit (cod. 90821). With 1" (26-34 mm) male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90813		1	13 x 16 x 8	13 x 16 x 8	0,002	0,37	432



## 24 V - 1" (26-34 mm) FEMALE SOLENOID VALVE

**90814**



Solenoid valve equipped with solenoid with anti-sand filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" (26-34 mm) female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90814		1	13 x 16 x 8	13 x 16 x 8	0,002	0,40	432



## 24 V - 1" (26-34 mm) MALE SOLENOID VALVE

**90815**



Solenoid valve equipped with solenoid with anti-sand filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" (26-34 mm) male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90815		1	13 x 16 x 8	13 x 16 x 8	0,002	0,37	432



UNDERGROUND IRRIGATION				
CODE		8058	8060	8022
DESCRIPTION		MULTIPLA AC 230/24 V LCD	MULTIPLA DC 9 V LCD	AQUA-HOME
				
Power supply	battery	buffer - 1 x  9V ALKALINE	2 x  9V ALKALINE	
	transformer	external 230-24V 		external 230-24V 
Protection rating				
No. of lines				
No. of programmable solenoid valves		1 to 6	1 to 6	1 to 8
Display		✓	✓	✓
Operating temperature		3 - 50 °C	3 - 50 °C	3 - 50 °C
Controls		7 rotary knobs and 2 buttons	7 rotary knobs and 2 buttons	1 rotary knob and 4 buttons
No. of programmes		1	1	2
Irrigation duration		5 - 60 mins	5 - 60 mins	1 min - 4 h 15 mins
Watering frequency		from 3 per day to 1 per week	from 3 per day to 1 per week	from 8 per day (per line) to 1 every 12 days
Weekly programming		—	—	✓
Manual mode		✓	✓	✓
Duration of manual irrigation		5 mins (early stop possible)	5 mins (early stop possible)	min. 5 mins - max. 4 h 15 mins (early stop possible)
Delayed start		Yes, up to 23 hours	Yes, up to 23 hours	You set the start time
Watering in progress indicator		YES (sprinkler icon and line number)	YES (sprinkler icon and line number)	YES (dial above set programme number flashes)
Flat battery indicator		✓	✓	—
Rain Sensor connection		YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)
Wall bracket		✓	✓	✓
Warranty		3 years	3 years	3 years

		
<b>90829</b>	<b>90821</b>	<b>90826</b>
<b>HYDRO-4</b>	<b>CONTROL UNIT</b>	<b>F. PROGRAMMABLE SOLENOID VALVE</b>
		
<b>2 x</b>	<b>1 x</b>	<b>1 x</b>
		
IP68	IP68	IP68
4	1 to 2	1
✓	✓	✓
3 - 60 °C	5 - 70 °C	5 - 70 °C
3 buttons	3 buttons	3 buttons
2	3 per line	6
1 - 60 mins	1 min - 23 h 59 mins	1 min - 23 h 59 mins
from 8 per day (per line) to 1 per week	from 3 per day (per line) to 1 per week	from 6 per day to 1 per week
✓	✓	✓
✓	✓	✓
min. 1 min - max. 60 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)
You set the start time	You set the start time	You set the start time
YES (set programme number flash)	YES (set programme number flash)	YES (set programme number flash)
✓	✓	✓
YES, with radio frequency rain sensor (90831)	YES, with wired rain sensor (90915)	NO
—	✓	—
3 years	3 years	3 years

# POP-UP SPRINKLERS

From Claber years of professional experience comes the pop-up sprinkler range. Designed and created to solve all your watering needs, these sprinklers are simple to use, while offering exclusive functional features. Claber pop-up come with 90°, 180° or 360° jets, or adjustable 0-350° jets. For long, narrow spaces there are square or rectangular area pop-up sprinklers. The jet can be easily adjusted at any time, using any standard hex key.



STAINLESS STEEL JET RANGE  
ADJUSTMENT SCREW  
WITH HEXAGONAL INSERT

WASHABLE FILTER TO ENSURE  
HIGH FILTERING POWER

STAINLESS STEEL RETURN  
SPRING

SELF-LUBRICATING CLUTCH  
(DELRIN) FOR  
ORIENTATION OF THE JET



SPECIAL PROFILE NOZZLE  
FOR UNIFORM, BALANCED  
JET DISTRIBUTION

HEAD ADJUSTABLE FROM 0°  
TO 350° WITH RING NUT  
SELF-LOCKING MECHANISM

BODY AND ROD MADE  
OF SHOCK-RESISTANT  
PLASTIC (ABS)

NON-Spill RUBBER CHECK  
VALVE WITH  
FROST-RESISTANT DEVICE

SEALING GASKETS FOR  
LEAKAGE-FREE INSTALLATION

0° - 350° - 2" ADJUSTABLE  
POP-UP (5 cm)**90004**0° - 350° - 3" ADJUSTABLE  
POP-UP (7,5 cm)**90005**0° - 350° - 4" ADJUSTABLE  
POP-UP (10 cm)**90006**

Professional static sprinkler with 0-350° adjustable head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Irrigated area max. 78 m<sup>2</sup>.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90004		24	3,7 x 10,9 x 3,7	20 x 13 x 39	0,010	1,45	1728	
90005		24	3,7 x 13,4 x 3,7	20 x 13 x 39	0,010	1,60	1728	
90006		24	3,7 x 16 x 3,7	20 x 13 x 39	0,010	1,80	1728	



0°-350°	90°	180°	270°	350°	r	
BAR	l/min	l/min	l/min	l/min		
1,5	2,8	5,3	7,7	9,2	r 4,0 m	5,7 m
2,0	3,3	5,8	9,0	10,8	r 4,5 m	6,4 m
3,0	4,0	6,9	10,8	13,0	r 5,0 m	7,1 m

ADJUSTABLE POP-UP 0° - 350°  
6 L/MIN - 2" (5 cm)**90020**ADJUSTABLE POP-UP 0° - 350°  
6 L/MIN - 4" (10 cm)**90019**

A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Irrigated area max. 55 m<sup>2</sup>.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90020		24	3,7 x 10,9 x 3,7	20 x 13 x 39	0,010	1,42	1728	
90019		24	3,7 x 16 x 3,7	20 x 13 x 39	0,010	1,80	1728	



0°-350°	90°	180°	270°	350°	r	
BAR	l/min	l/min	l/min	l/min		
1,5	2,0	3,3	4,5	6,0	r 3,7 m	5,3 m
2,0	2,2	3,6	5,2	6,8	r 4,0 m	5,7 m
3,0	2,5	4,4	6,4	8,2	r 4,2 m	6,0 m

0° - 350°  
ADJUSTABLE HEAD**90007**

Made of shock-resistant ABS plastic.  
Filter with support provided.  
Stainless steel jet range adjustment screw.  
Compatible with other brand sprinklers.  
Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90007		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,31	1728	

360° JET POP-UP - 2" (5 cm)

90041



Professional static sprinkler with 360° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Irrigated area max. 58 m<sup>2</sup>.

360° JET POP-UP - 4" (10 cm)

90043



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90041		12	3,7 x 11 x 3,7	10 x 13 x 39	0,005	0,78	1440	8 000625 900411
90043		12	3,7 x 16 x 3,7	10 x 13 x 39	0,005	0,93	1440	8 000625 900435



360°			r	
BAR	l/min	m <sup>2</sup>		
1,5	8,2	43,0	r 3,7 m	5,3 m
2,0	9,5	50,3	r 4,0 m	5,7 m
3,0	11,5	56,7	r 4,3 m	6,0 m

360° HEAD

90044



Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90044		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,31	1728	8 000625 900442

180° JET POP-UP - 2" (5 cm)

90053



Professional static sprinkler with 180° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Irrigated area max. 31,8 m<sup>2</sup>.

180° JET POP-UP - 4" (10 cm)

90055



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90053		12	3,7 x 11 x 3,7	10 x 13 x 39	0,005	0,78	1440	8 000625 900534
90055		12	3,7 x 16 x 3,7	10 x 13 x 39	0,005	0,95	1440	8 000625 900558



180°			r	
BAR	l/min	m <sup>2</sup>		
1,5	5,1	25,1	r 4,0 m	5,7 m
2,0	6,0	29,0	r 4,3 m	6,0 m
3,0	7,1	31,8	r 4,5 m	6,4 m

180° HEAD

90056



Made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90056		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,32	1728	8 000625 900565

## 90° JET POP-UP - 2" (5 cm)

**90095**

Professional static sprinkler with 90° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation.

The nozzle has a specially designed profile to ensure uniform and balanced water distribution.

Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Irrigated area max. 12,6 m<sup>2</sup>.


## 90° JET POP-UP - 4" (10 cm)

**90097**

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90095		12	3,7 x 11 x 3,7	10 x 13 x 39	0,005	0,78	1440
90097		12	3,7 x 16 x 3,7	10 x 13 x 39	0,005	0,93	1440



90°			r	
BAR	l/min	m <sup>2</sup>		
1,5	2,8	8,6	r3,3 m	4,6 m
2,0	3,2	9,6	r3,5 m	4,9 m
3,0	3,9	12,6	r4,0 m	5,7 m



## 90° HEAD

**90098**

Made of shock-resistant ABS plastic.  
Filter with support provided.  
Stainless steel jet range adjustment screw.  
Compatible with other brand sprinklers.  
Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90098		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,025	0,32	1728



## SQUARE AREA POP-UP - 4" (10 cm)

### 90133



Professional static sprinkler with square area. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Height from ground 4" (10 cm). Irrigated area max. 64 m<sup>2</sup>.

BAR	l/min	m <sup>2</sup>	A B	
1,5	8,9	36,0	6 x 6 m	5,5 m
2,0	10,3	49,0	7 x 7 m	6,3 m
3,0	12,6	64,0	8 x 8 m	7,3 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90133		12	3,7 x 16 x 3,7	10 x 13 x 39	0,005	0,95	1440	8 000625 901333

## SQUARE AREA HEAD

### 90134



Square area head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90134		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,31	1728	8 000625 901340

## CENTRE-STRIP POP-UP - 4" (10 cm)

### 90109



Professional static sprinkler with centre-strip. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Height from ground 4" (10 cm). Irrigated area max. 20,3 m<sup>2</sup>.

BAR	l/min	m <sup>2</sup>	A B	
1,5	6,8	13,2	12,0 x 1,1 m	
2,0	8,3	17,2	13,2 x 1,3 m	
3,0	10,2	20,3	13,5 x 1,5 m	1,2 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90109		12	3,7 x 16 x 3,7	10 x 13 x 39	0,005	0,97	1440	8 000625 901098

## CENTRE-STRIP HEAD

### 90110



Centre-strip head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90110		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,32	1728	8 000625 901104

**END-STRIP POP-UP - 4"**  
(10 cm)**90121**

Professional static sprinkler with end-strip. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Height from ground 4" (10 cm). Irrigated area max. 11,2 m<sup>2</sup>.

BAR	l/min	m <sup>2</sup>	A B	
1,5	3,8	8,0	8,0 x 1,0 m	
2,0	4,4	9,1	8,3 x 1,1 m	
3,0	5,4	11,2	9,3 x 1,2 m	1,1 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90121		12	3,7 x 16 x 3,7	10 x 13 x 39	0,005	0,95	1440	8 000625 901210

**END-STRIP HEAD****90122**

End-strip head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90122		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,32	1728	8 000625 901227

**SET OF POP-UP SPARE PARTS****90124**

Set of spare parts comprising:  
- 2 pop-up ring nuts  
- 4 pop-up sealing gaskets for Pop-up, Colibri and Turbo-Jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90124		12	7,9 x 15,7 x 2,8	25 x 10 x 19	0,005	0,46	1728	8 000625 901241

**SET OF SPARE POP-UP AND COLIBRI FILTERS****90123**

5 replacement filters for Pop-up and Colibri sprinklers.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90123		12	7,9 x 15,7 x 2	25 x 10 x 19	0,005	0,29	1728	8 000625 901234



# TURBINES

Claber's range of turbine sprinklers is carefully designed to best meet the irrigation needs of medium-sized and large gardens. Total reliability, versatility of use and silence during operation make the Claber turbines the ideal solution for professional quality DIY systems. The many regulation options, from the angle of rotation to the range of the jet, ensure the best irrigation efficiency.



HOLE FOR INSERTING LIFTING KEY

ANGLE OF ROTATION ADJUSTMENT

HYDRAULIC MOTOR

STAINLESS STEEL RETURN SPRING

WASHABLE FILTER



DIFFUSER SCREW

INTERCHANGEABLE NOZZLE

BODY AND ROD MADE OF SHOCK-RESISTANT PLASTIC (ABS)

**MEDIUM-JET TURBINE SPRINKLER**

**90474**



Medium-jet turbine sprinklers with interchangeable nozzles. A working range that can be adjusted from 40° to 360°, with just a simple flat head screwdriver, a pointer on the lid showing the selected work arc. The sprinkler can be regulated before installation, after installation in a static position, or during operation. A special mechanism avoids damage to the gears during regulation. Internal removable filter. Running pressure from 1.5 to 4 bars. Radius from 4 to 9 m. 1/2" (15-21 mm) screw base. Height from ground 4" (10 cm). Irrigated area max. 254 m<sup>2</sup>.

40°-360°					40°-360°					40°-360°				
BAR		I/min	r		BAR		I/min	r		BAR		I/min	r	
1	0,75	2,7	r 4,8 m	6,8 m	2	0,75	2,8	r 5,0 m	7,1 m	3	0,75	3,1	r 5,2 m	7,4 m
	1	4,4	r 5,8 m	8,2 m		1	4,8	r 5,9 m	8,3 m		1	5,8	r 6,3 m	8,9 m
	1,5	4,5	r 6,7 m	9,5 m		1,5	5,1	r 6,9 m	9,8 m		1,5	6,7	r 7,2 m	10,2 m
	2	6,0	r 7,2 m	10,2 m		2	6,6	r 7,5 m	10,6 m		2	8,3	r 8,1 m	11,5 m
	3	9,4	r 8,0 m	11,3 m		3	10,0	r 8,4 m	11,9 m		3	11,8	r 9,0 m	12,7 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90474		12	7 x 15,5 x 6,5	18 x 18 x 40	0,012	2,21	840



**LONG-JET TURBINE SPRINKLER**

**90478**



Large jet turbine sprinkler with 9 interchangeable nozzles. Adjustable between 40° and 360° with continuous rotation. Adjustable jet with proportional reduction of the flow rate to ensure optimal uniformity of distribution and reduce consumption by up to 30%. Slits to remove any sand contained in the water. Pull-out internal filter. Silent thanks to internal lubrication. Protrudes 5" (12.5 cm) from earth. 3/4" (20-27 mm) F threaded base. Rubber cover to ensure a long product life by preventing any impurities from getting in. Provided with adjustment key. Maximum watering area 670 m<sup>2</sup>.

40°-360°					40°-360°					40°-360°				
BAR		I/min	r		BAR		I/min	r		BAR		I/min	r	
2	1	4,5	r 10,1 m	14,3 m	3	1	5,1	r 10,1 m	14,2 m	4	1	6,8	r 10,1 m	14,2 m
	1,5	5,7	r 11,0 m	15,5 m		1,5	7,0	r 11,3 m	15,9 m		1,5	8,3	r 11,6 m	16,4 m
	2	6,8	r 10,7 m	15,1 m		2	8,7	r 10,7 m	15,1 m		2	11,0	r 11,6 m	16,4 m
	2,5	9,5	r 11,3 m	15,9 m		2,5	11,8	r 11,6 m	16,4 m		2,5	14,4	r 12,2 m	17,2 m
	3	11,4	r 11,0 m	15,5 m		3	13,5	r 11,3 m	15,9 m		3	16,7	r 12,5 m	17,6 m
	4	15,1	r 11,3 m	15,9 m		4	17,8	r 11,9 m	16,8 m		4	21,2	r 13,2 m	17,2 m
	5	18,2	r 11,3 m	15,9 m		5	22,2	r 11,6 m	16,4 m		5	27,3	r 13,1 m	18,5 m
	6	22,7	r 12,2 m	17,2 m		6	26,2	r 12,5 m	17,6 m		6	31,8	r 13,4 m	18,9 m
	8	29,9	r 11,6 m	16,4 m		8	35,9	r 13,4 m	18,9 m		8	42,0	r 14,0 m	19,8 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90478		8	9 x 19,5 x 8,5	20 x 23 x 39	0,017	3,30	384



**MULTI-JET TURBINE WITH LONG JET RANGE**

**90480**



Turbine sprinkler with 4 built-in nozzles to ensure uniform irrigation at any operating angle (adjustable between 40°-360°). Use a common screwdriver to select which nozzle to use, set the working angle and adjust the flow. Special nozzles to ensure maximum efficiency and water savings. Excellent performance, even at low pressure. Internal filter. Recommended operating pressure between 2 and 5 bar. Radius between 9.8 and 11.0 m. 3/4" (20-27 mm) female threaded base, height from ground 5" (12,5 cm). Irrigated area max. 580 m<sup>2</sup>.

40°-360°					40°-360°					40°-360°				
BAR		I/min	r		BAR		I/min	r		BAR		I/min	r	
1	1	3,5	r 7,5 m	10,7 m	2	1	4,8	r 10,0 m	14,2 m	3	1	5,9	r 10,5 m	14,9 m
	2	5,6	r 8,4 m	11,9 m		2	7,9	r 11,0 m	15,5 m		2	9,8	r 12,0 m	17,0 m
	3	9,3	r 7,8 m	11,1 m		3	13,3	r 11,8 m	16,7 m		3	16,5	r 13,0 m	18,5 m
	4	12,6	r 6,5 m	9,2 m		4	18,5	r 11,4 m	16,2 m		4	22,4	r 13,6 m	19,3 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90480		8	9 x 19 x 7,2	20 x 23 x 39	0,017	3,10	384






												
<b>90095</b>	<b>90097</b>	<b>90133</b>	<b>90109</b>	<b>90121</b>	<b>90210</b>	<b>90220</b>	<b>90230</b>	<b>90264</b>	<b>90266</b>	<b>90474</b>	<b>90478</b>	<b>90480</b>
					<b>TURBINE SPRINKLERS</b>							
✓	✓	✓	✓	✓								
					✓	✓	✓	✓	✓	✓	✓	✓
2" (5 cm)	4" (10 cm)	4" (10 cm)	4" (10 cm)	4" (10 cm)	2" (5 cm)	2" (5 cm)	2" (5 cm)	3" (7,5 cm)	4" (10 cm)	4" (10 cm)	5" (12,5 cm)	5" (12,5 cm)
ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	3/4" F	3/4" F
1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar
												
✓	✓	✓	✓	✓	✓	✓	✓					
								✓	✓	✓	✓	✓
1	1	1	1	1	1	1	1	1	1	5 interchangeable	9 interchangeable	4 built-in
												
90°	90°				360°	180°	90°	80°-360°	80°-360°	40°-360°	40°-360°	40°-360°
12,6 m <sup>2</sup>	12,6 m <sup>2</sup>	64 m <sup>2</sup>	20,3 m <sup>2</sup>	11,2 m <sup>2</sup>	60 m <sup>2</sup>	35 m <sup>2</sup>	18 m <sup>2</sup>	95 m <sup>2</sup>	95 m <sup>2</sup>	254 m <sup>2</sup>	670 m <sup>2</sup>	580 m <sup>2</sup>
3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	4 bar	3 bar
9	9	7 x 7	14 x 1	17 x 1	9	9,8	9,8	9	11	18	28	27,2
3,1	3,1	8,2	6,6	3,3	3,7	2,9	2	4,4	4,4	2,7	4,5	3,5
4	4	11,8	9	4,7	5	4	2,3	7,2	7,2	11,8	42	22,4
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

UNDERGROUND IRRIGATION

# UNDERGROUND ACCESSORIES

Valve boxes, pipes, connectors and accessories: there are the different components that make up an underground system. Claber means quality, durability and reliability in every detail, to ensure that your plants and lawn are always watered efficiently, at the right time and without wasting water.

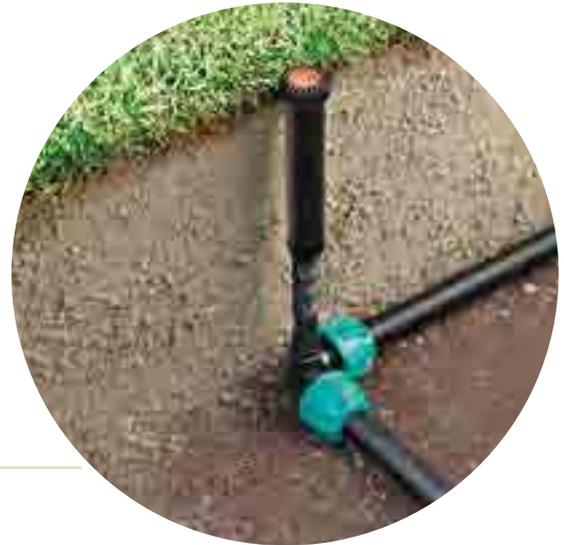

## ACCESSORIES

Everything you need

T 1" (26-34 mm) F. x 1" (26-34 mm) F. x 1" (26-34 mm) M.

**90808**



For connecting solenoid valves in series; o-ring seal.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90808		10	15 x 4,5 x 13	10 x 13 x 39	0,005	1,21	1200	 8 000625 908080

1" (26-34 mm) F. x 1" (26-34 mm) M. ELBOW

**90807**



For connecting a solenoid valve; o-ring seal.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90807		10	15 x 5 x 16	10 x 13 x 39	0,005	0,94	1200	 8 000625 908073

1" (26-34 mm) F. x 1" (26-34 mm) M. COUPLING

**90803**



Coupling for connection to solenoid valves; o-ring seal.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90803		10	15 x 4,4 x 13	10 x 13 x 39	0,005	0,72	1200	 8 000625 908035

## DRAINAGE VALVE

**90910**



For automatic circuit draining. Especially useful in areas with cold winters. Bronze with 1/2" (15-21 mm) male thread and 3/4" (20-27 mm) adaptor. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90910		15	8 x 13 x 2	10 x 13 x 39	0,005	1,10	1800	 8 000625 909100

3/4" F (20-27 mm)  
x 3/4" F (20-27 mm) ELBOW

**90709**



1" F (26-34 mm)  
x 1" F (26-34 mm) ELBOW

**90710**



3/4" F (20-27 mm)  
x 3/4" F (20-27 mm)



90709

1" F (26-34 mm)  
x 1" F (26-34 mm)



90710

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90709		20	Ø 5,2 x 5,2 x 3,6	10 x 13 x 39	0,005	0,75	2400	8 000625 907090
90710		20	Ø 6,2 x 6,2 x 4,4	10 x 13 x 39	0,005	1,07	2400	8 000625 907106

1/2" F (15-21 mm) x  
1/2" F (15-21 mm) COUPLING

**90707**



3/4" F (20-27 mm) x  
3/4" F (20-27 mm) COUPLING

**90706**



1" F (26-34 mm)  
x 1" F (26-34 mm) COUPLING

**90708**



1/2" F (15-21 mm)  
x 1/2" F (15-21 mm)



90707

3/4" F (20-27 mm)  
x 3/4" F (20-27 mm)



90706

1" F (26-34 mm)  
x 1" F (26-34 mm)



90708

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90707		40	Ø 3,9 x 3,9 x 3,1	10 x 13 x 39	0,005	0,73	4800	8 000625 907076
90706		40	Ø 4,1 x 3,6 x 3,6	10 x 13 x 39	0,005	0,86	4800	8 000625 907069
90708		20	Ø 4,9 x 4,5 x 4,5	10 x 13 x 39	0,005	0,85	2400	8 000625 907083

3/4" F (20-27 mm) x  
1/2" F (15-21 mm) COUPLING

**90704**



1" F (26-34 mm) x  
3/4" F (20-27 mm) COUPLING

**90705**



3/4" F (20-27 mm)  
x 1/2" F (15-21 mm)



90704

1" F (26-34 mm)  
x 3/4" F (20-27 mm)



90705

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90704		40	Ø 4,5 x 4,5 x 4,5	10 x 13 x 39	0,005	0,93	4800	8 000625 907045
90705		20	Ø 4,0 x 3,6 x 3,6	10 x 13 x 39	0,005	0,77	2400	8 000625 907052

3/4" F (20-27 mm) T  
CONNECTOR

**90712**



1" F (26-34 mm) T  
CONNECTOR

**90711**



3/4" F (20-27 mm)  
x 3/4" F (20-27 mm)



90712

1" F (26-34 mm)  
x 1" F (26-34 mm)



90711

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90712		20	Ø 6,7 x 5,2 x 3,6	10 x 13 x 39	0,005	0,94	2400	8 000625 907120
90711		20	Ø 8,1 x 6,3 x 4,4	20 x 13 x 39	0,010	1,57	1440	8 000625 907113

3/4" M (20-27 mm)  
x 1/2" M (15-21 mm) NIPPLE

**90703**



3/4" M (20-27 mm)  
x 3/4" M (20-27 mm) NIPPLE

**90702**



1" M (26-34 mm)  
x 3/4" M (20-27 mm) NIPPLE

**90701**



1" (26-34 mm) M  
x 1" (26-34 mm) M NIPPLE

**90805**



1" (26-34 mm) M  
3/4" (20-27 mm) F REDUCER

**90809**



1/2" (15-21 mm) M  
THREADED CAP

**90714**



3/4" (20-27 mm) M  
THREADED CAP

**90713**



1" (26-34 mm) M  
THREADED CAP

**90715**




1/2" FEMALE THREADED CAP

**90801**



3/4" FEMALE THREADED CAP


**90802**

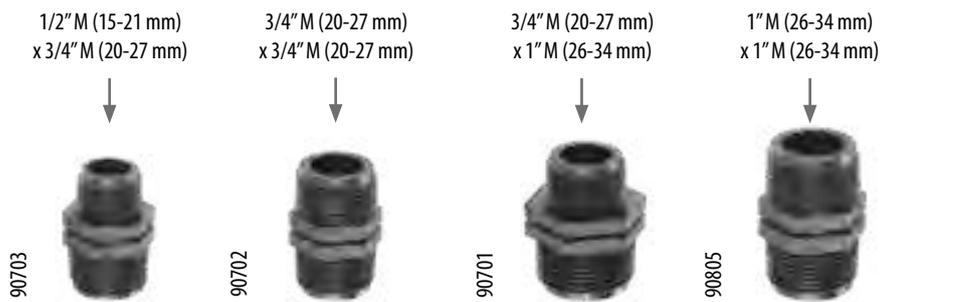


code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90703		40	Ø 4,3 x 2,6 x 2,6	10 x 13 x 39	0,005	0,58	4800	8 000625 907038
90702		40	Ø 4,4 x 2,6 x 2,6	10 x 13 x 39	0,005	0,63	4800	8 000625 907021
90701		40	Ø 4,7 x 3,5 x 3,5	10 x 13 x 39	0,005	0,86	4800	8 000625 907014
90805		40	Ø 5 x 3,5 x 3,5	10 x 13 x 39	0,005	0,94	4800	8 000625 908059



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90809		30	3,6 x 3,0 x 3,6	10 x 13 x 39	0,005	0,48	3600	8 000625 908097

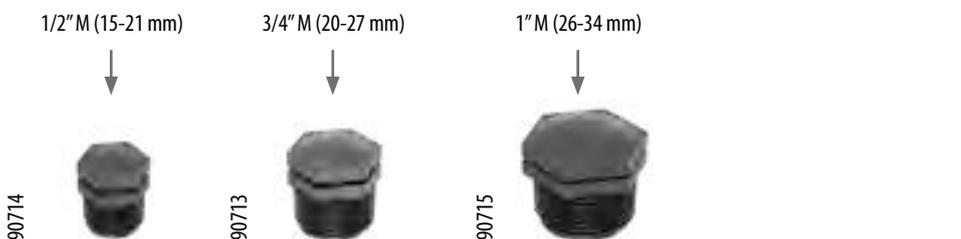

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90714		20	Ø 2,8 x 2,1 x 2,1	10 x 13 x 39	0,005	0,42	2400	8 000625 907144
90713		40	Ø 3 x 2,7 x 2,7	10 x 13 x 39	0,005	0,53	4800	8 000625 907137
90715		40	Ø 3,5 x 3,5 x 3,5	10 x 13 x 39	0,005	0,76	4800	8 000625 907151

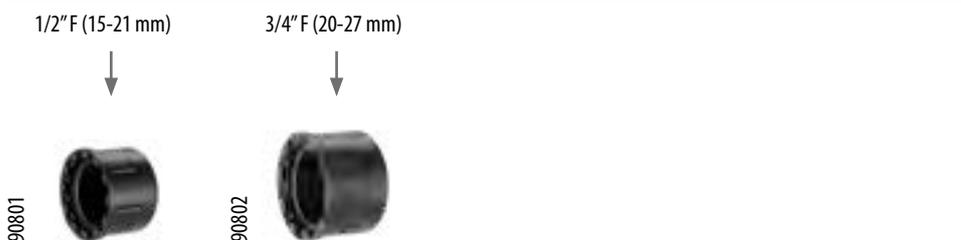

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	barcode
90801		20x2	1,9 x 2,7 x 2,7	10 x 13 x 39	0,005	0,40	4800	8 000625 908011
90802		20x2	2,3 x 3,3 x 3,3	10 x 13 x 39	0,005	0,52	4800	8 000625 908028

Ø 3/4" (20-27 mm) - 1/2" (15-21 mm)  
THREADED EXTENSION

**90721**



For fitting sprinklers to the polyethylene tubes (with compression connectors).  
Can be cut to the height desired.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90721		50	11,3 x 15 x 3	20 x 13 x 39	0,010	1,46	3600	8 000625 907212

Ø 3/4" (20-27 mm) - 3/4" (20-27 mm)  
THREADED EXTENSION

**90722**



For fitting sprinklers to the polyethylene tubes (with compression connectors).  
Can be cut to the height desired.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90722		50	14,6 x 15 x 3	20 x 13 x 39	0,010	1,74	3600	8 000625 907229

Ø 1/2" (15-21 mm) - 1/2" (15-21 mm)  
THREADED EXTENSION

**90720**



For fitting sprinklers to the polyethylene tubes (with compression connectors).  
Can be cut to the height desired.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90720		50	10,5 x 15 x 25	20 x 13 x 39	0,010	1,37	3600	8 000625 907205

FLEXIBLE EXTENSION Ø 3/4"  
(20-27 mm) - 3/4" (20-27 mm)

**90747**



For installation of pop-up sprinklers and turbines with bracket couplings, T-connectors, elbow connectors with female elbows.  
Handy when soil settles or for reaching restricted points like corners of a garden or pavement edges. Length: 35 cm. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90747		8	8 x 33 x 2,5	10 x 13 x 39	0,005	0,75	960	8 000625 907472

FLEXIBLE EXTENSION Ø 3/4"  
(20-27 mm) - 1/2" (15-21 mm)

**90746**



For installation of pop-up sprinklers and turbines with bracket couplings, T-connectors, elbow connectors with female elbows.  
Handy when soil settles or for reaching restricted points like corners of a garden or pavement edges. Length: 35 cm. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90746		8	8 x 33 x 2,5	10 x 13 x 39	0,005	0,75	960	8 000625 907465

**BRACKET COUPLING FOR Ø 32 mm HOSE**

**90276**



For installing a sprinkler on the main line without cutting the tube.  
Header bag of 2 pcs.

**BRACKET COUPLING FOR Ø 25 mm HOSE**

**90450**



3/4" (20-27 mm) F



90276

3/4" (20-27 mm) F



90450

1/2" (15-21 mm) F



90858

**BRACKET COUPLING FOR Ø 20 mm HOSE**

**90858**



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90276		7 x 2	21 x 5 x 19	20 x 13 x 39	0,010	1,70	504	8 000625 902767
90450		8 x 2	20 x 4 x 16,5	20 x 13 x 39	0,010	1,24	576	8 000625 904501
90858		10 x 2	15 x 13 x 3,5	20 x 13 x 39	0,010	1,20	720	8 000625 908585

**Ø 1" (26-34 mm) F MANUAL VALVE**

**90917**



Single-ring female/female Ø 1" (26-34 mm) manual valve for closing water line before the solenoid valves for inspection and maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90917		5	14,5 x 7 x 17	10 x 13 x 39	0,005	0,99	600	8 000625 909179

**Ø 3/4" (20-27 mm) F MANUAL VALVE**

**90918**



Single-ring female/female Ø 3/4" (20-27 mm) manual valve for closing water line before the solenoid valves for inspection and maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90918		5	19 x 7 x 15	10 x 13 x 39	0,005	0,97	600	8 000625 909186

**CIRCUIT FILTER**

**90919**



Polypropylene filter with 1" (26-34 mm) double male thread filter cartridge made from 120 mesh stainless steel wire netting.  
Maximum flow 5 m<sup>3</sup>/h. Operating pressure from 0,5 to 8 bar.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90919		3	15 x 8 x 26	20 x 13 x 39	0,010	0,79	216	8 000625 909193

**QUICK-CLICK STANDPIPE**

**90930**



Complete with bayonet rod featuring male Quick-Click connector for connecting the hoses in all garden corners. Automatic opening and shut-off valve. 3/4" (20-27 mm) male threaded for connection to bracket.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90930		4	15 x 8 x 22	20 x 13 x 39	0,010	1,39	288	

**SPARE ROD FOR QUICK COUPLING VALVE INLET**

**90929**



Bayonet rod featuring male Quick-Click connector for connecting hoses to every corner of the garden. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90929		5	14 x 24 x 4	20 x 13 x 39	0,010	0,80	360	

HYDRANT VALVE BOX

90520



Circular valve box with hinged cover, shaped to allow the hose to pass through. Connects to underground system with one of the two 3/4" F threaded outlets located underneath and to the side. Plug with OR provided to lock the unused outlet. Inside there is a metal 3/4" M metal ball valve, for easy connection of a flexible hose. Holes on the base to allow water to drain.



A mm	B mm	H mm
Ø 210		140



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90520		3	21 x 14 x 21	39 x 19 x 39	0,028	2,93	72



CIRCULAR VALVE BOX

90500



Circular valve box with snap closure lid. Lateral openings at the base. It contains 1 valve.



A mm	B mm	H mm
Ø 290		250



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90500		1	29 x 25 x 32	29 x 25 x 31	0,023	1,20	



RECTANGULAR VALVE BOX


90515



Rectangular valve box with tamper-proof lid. Resistant to high and low temperatures and UV radiation. It contains 4 valves.



A mm	B mm	H mm
400	510	310



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90515		1	40 x 51 x 31	40 x 50 x 31	0,062	3,30	



RECTANGULAR VALVE BOX


90510



Rectangular valve box with tamper-proof lid. Resistant to high and low temperatures and UV radiation. It contains 5 valves.



A mm	B mm	H mm
500	640	310



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90510		1	50 x 64 x 31	50 x 64 x 31	0,099	7,42	



# COMPRESSION CONNECTORS AND PIPES

Available in 20, 25 and 32 mm version, the range of pipes and connectors adapts to the size of your garden for made-to-measure solutions.

These compression fittings guarantee a perfect, watertight connection, and the extensive range means you can connect up to any water outlet, branch off from the irrigation line and install any pop-up sprinklers.



## Ø 20 mm PE TUBE

**90372**



**90373**



Coils of PFA6 polyethylene tube for compression connectors. Flexible. Resistant to algae formation and low temperatures.

90372 - 15 m  
90373 - 25 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90372		1	Ø 46 x 7	Ø 46 x 7	0,001	1,60	8
90373		1	Ø 46 x 13	Ø 46 x 13	0,016	2,70	8

## Ø 25 mm PE TUBE

**90380**



**90385**



Coils of PFA6 polyethylene tube for compression connectors. Flexible. Resistant to algae formation and low temperatures.

90380 - 25 m  
90385 - 50 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90380		1	Ø 58 x 17,5	Ø 58 x 17,5	0,060	4,2	8
90385		1	Ø 58 x 25	Ø 58 x 25	0,084	8,6	8

## Ø 32 mm PE TUBE

**90390**



**90395**



Coils of PFA6 polyethylene tube for compression connectors. Flexible. Resistant to algae formation and low temperatures.

90390 - 25 m  
90395 - 50 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90390		1	Ø 73 x 15	Ø 73 x 15	0,063	6,60	8
90395		1	Ø 86 x 19	Ø 86 x 19	0,110	13,20	8

**1" (26-34 mm) M. THREADED CONNECTOR Ø 20 mm****90318**

For connecting a polyethylene tube to a female 1" (26-34 mm) threaded water supply or solenoid valve (cod. 90812-90814).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90318		20	4,4 x 6,7 x 4,4	10 x 13 x 39	0,005	0,88	2400	8 000625 903184

**1" (26-34 mm) F. THREADED CONNECTOR Ø 20 mm****90319**

For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valves (cod. 90813 - 90815).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90319		20	4,4 x 6,9 x 4,4	10 x 13 x 39	0,005	0,93	2400	8 000625 903191

**F. 3/4" (20-27 mm) - 1/2" THREADED CONNECTOR (15-21 mm) Ø 20 mm****90320**

For connecting a polyethylene tube to a 3/4" (20-27 mm) threaded tap or solenoid valve with male 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90320		20	4,4 x 8,3 x 4,4	10 x 13 x 39	0,005	0,95	2400	8 000625 903207

**COUPLING Ø 20 mm****90321**

For connecting two polyethylene tubes or repairing a punctured tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90321		15	4,4 x 8,9 x 4,4	10 x 13 x 39	0,005	0,87	1800	8 000625 903214

**ELBOW CONNECTOR Ø 20 mm****90322**

For joining two polyethylene tubes at right angle.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90322		15	8 x 4,4 x 8	10 x 13 x 39	0,005	0,91	1800	8 000625 903221

**T Ø 20 mm****90323**

For connecting three polyethylene tubes to create a branch off.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90323		10	11,7 x 8,2 x 4,4	10 x 13 x 39	0,005	0,88	1200	8 000625 903238

**1/2" (15-21 mm) M. THREADED ELBOW Ø 20 mm**

**90324**



For connecting Colibri micro-sprinklers, Turbo-Jet, Pop-up sprinklers at the end of 20 mm main tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90324		20	7,15 x 6,3 x 4,4	10 x 13 x 39	0,005	0,78	2400	8 000625 903245

**1/2" (15-21 mm) M. THREADED T CONNECTOR Ø 20 mm**

**90325**



For connecting Colibri micro-sprinklers, Turbo-Jet, Pop-up sprinklers in series to 20 mm main tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90325		15	11,7 x 6,4 x 4,4	10 x 13 x 39	0,005	0,98	1800	8 000625 903252

**3/4" (20-27 mm) F. THREADED ELBOW Ø 20 mm**

**90326**



For connecting a threaded coupling or drainage valve to the end of the line.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90326		20	7,8 x 6,7 x 4,4	10 x 13 x 39	0,005	0,94	2400	8 000625 903269

**END-OF-LINE PLUG Ø 20 mm**

**90327**



For closing off one end of the polyethylene tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90327		20	4,4 x 4,9 x 4,4	10 x 13 x 39	0,005	0,68	2400	8 000625 903276

**Ø 16 mm - Ø 20 mm COUPLING**

**90328**



To connect two polyethylene hoses of different diameters, Ø 16 and 20 mm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90328		20	8,3 x 4,4 x 4,4	10 x 13 x 39	0,005	0,75	2400	8 000625 903283

**Ø 20 mm WALL PLATE ELBOW**

**90329**



Wall plate elbow to connect a 20 mm polyethylene hose and a tap with 1/2" M fitting, creating a new water intake connected to the system. Attachment to wall with screws and plugs (not included).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90329		10	6 x 8,8 x 7,1	10 x 13 x 39	0,005	0,72	1200	8 000625 903290

## CONNECTOR Ø 25 mm

**90424**

**90424 F. 3/4" (20-27 mm) THREAD** For connecting a 3/4" polyethylene tube to a 3/4" (20-27 mm) male threaded tap or solenoid valve with male 3/4" (20-27 mm) thread.

**90524**

**90524 F. 1" (26-34 mm) THREAD** For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valve (cod. 90813-90815).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90424		15	5,2 x 8,15 x 5,2	10 x 13 x 39	0,005	0,90	1800	8 000625 904242
90524		10	5,2 x 7,7 x 5,2	10 x 13 x 39	0,005	0,68	1200	8 000625 905249

COUPLING Ø 25 mm  
1" (26-34 mm) THREAD**90420**

For connecting a polyethylene tube to a female 1" (26-34 mm) threaded water supply or solenoid valve (cod. 90812-90814).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90420		15	5,2 x 7,5 x 5,2	10 x 13 x 39	0,005	0,84	1800	8 000625 904204

COUPLING Ø 25 mm  
3/4" (20-27 mm) THREAD**90421**

For connecting a polyethylene tube to a female 3/4" (20-27 mm) threaded water supply or solenoid valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90421		15	5,2 x 7,05 x 5,2	10 x 13 x 39	0,005	0,81	1800	8 000625 904211

## COUPLING Ø 25 mm

**90419**

For connecting two polyethylene tubes or repairing a punctured tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90419		9	5,2 x 10,2 x 5,2	10 x 13 x 39	0,005	0,82	1080	8 000625 904198

ELBOW CONNECTOR  
Ø 25 mm**90417**

For joining two polyethylene tubes at right angle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90417		7	5,2 x 10 x 5,2	10 x 13 x 39	0,005	0,73	840	8 000625 904174

## T Ø 25 mm CONNECTOR

**90422**

For connecting three polyethylene tubes to create a branch off.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90422		4	5,2 x 7,5 x 5,2	10 x 13 x 39	0,005	0,64	480	8 000625 904228

ELBOW Ø 25 mm  
F. 3/4" (20-27 mm) THREAD

**90423**



For connecting a threaded coupling or drainage valve to the end of the line.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90423		12	8,9 x 7,5 x 5,2	10 x 13 x 39	0,005	0,83	1440	8 000625 904235

T Ø 25 mm 3/4" (20-27 mm)  
THREAD

**90418**



For installation on main polyethylene tube after cutting and joining two tube sections.  
With 3/4" (20-27 mm) female thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90418		6	16,5 x 8,3 x 6,2	10 x 13 x 39	0,005	0,75	720	8 000625 904181

ELBOW CONNECTOR Ø 25 mm  
F. 1/2" (15-21 mm) THREAD

**90427**



For installation on main polyethylene tube after cutting and joining two tube sections.  
Used with 1/2" (15-21 mm) threaded extension.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90427		7	5,2 x 11,5 x 5,2	10 x 13 x 39	0,005	0,75	840	8 000625 904273

END-OF-LINE PLUG Ø 25 mm

**90425**



For closing off one end of the polyethylene tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90425		15	5,2 x 5,9 x 5,2	10 x 13 x 39	0,005	0,77	1800	8 000625 904259

Ø 20 mm - Ø 25 mm  
COUPLING

**90428**



To connect two polyethylene hoses of different diameters, Ø 20 and 25 mm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90428		12	5,1 x 9,5 x 5,1	10 x 13 x 39	0,005	0,73	1440	8 000625 904280

Ø 25 mm WALL PLATE  
ELBOW

**90429**



Wall plate elbow to connect a 25 mm polyethylene hose and a tap with 3/4" M fitting, creating a new water intake connected to the system.  
Attachment to wall with screws and plugs (not included).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90429		10	7,5 x 11 x 8,6	20 x 13 x 39	0,010	1,13	720	8 000625 904297

**CONNECTOR Ø 32 mm  
F. 3/4" (20-27 mm) THREAD****90274**

For connecting a polyethylene tube to a 3/4" (20-27 mm) threaded tap or solenoid valve with male 3/4" (20-27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90274		10	6,2 x 7,7 x 6,2	10 x 13 x 39	0,005	0,90	1200	8 000625 902743

**CONNECTOR Ø 32 mm  
F. 1" (26-34 mm) THREAD****90374**

For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valves (cod. 90813-90815).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90374		12	6,2 x 8,15 x 6,2	20 x 13 x 39	0,010	1,16	864	8 000625 903740

**COUPLING Ø 32 mm  
1" (26-34 mm) THREAD****90271**

For connecting a polyethylene tube to a female threaded water supply or solenoid valve (cod. 90812-90814).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90271		20	6,2 x 8,2 x 6,2	20 x 13 x 39	0,010	1,70	1440	8 000625 902712

**COUPLING Ø 32 mm****90275**

For connecting two polyethylene tubes or repairing a punctured tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90275		12	6,2 x 12 x 6,2	20 x 13 x 39	0,010	1,70	864	8 000625 902750

**ELBOW CONNECTOR  
Ø 32 mm****90270**

For joining two polyethylene tubes at right angle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90270		8	12 x 12 x 6,2	20 x 13 x 39	0,010	1,70	576	8 000625 902705

**T Ø 32 mm CONNECTORS****90272**

For connecting three polyethylene tubes to create a branch off.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90272		5	16,5 x 11 x 6,2	20 x 13 x 39	0,010	1,20	360	8 000625 902729

**ELBOW Ø 32 mm  
F. 3/4" (20-27 mm) THREAD**

**90273**



For connecting a threaded coupling or drainage valve to the end of the line.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90273		12	10,5 x 8,1 x 6,2	20 x 13 x 39	0,010	1,30	864	8 000625 902736

**T Ø 32 mm 3/4" (20-27 mm)  
THREAD**

**90416**



For installation on main polyethylene tube after cutting and joining two tube sections.  
With 3/4" (20-27 mm) female thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90416		5	16,5 x 8,5 x 6,2	20 x 13 x 39	0,010	0,96	360	8 000625 904167

**ELBOW CONNECTOR Ø 32 mm  
F. 3/4" (20-27 mm) THREAD**

**90426**



For installation on main polyethylene tube after cutting and joining two tube sections.  
Used with 3/4" (20-27 mm) threaded extension.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90426		8	11,5 x 6 x 6,2	20 x 13 x 39	0,010	1,36	576	8 000625 904266

**END-OF-LINE PLUG Ø 32 mm**

**90277**



For closing off one end of the polyethylene tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90277		12	6,2 x 6,4 x 6,2	10 x 13 x 39	0,005	0,94	1440	8 000625 902774

**Ø 25 mm - Ø 32 mm  
COUPLING**

**90279**



To connect two polyethylene hoses of different diameters, Ø 25 and 32 mm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet	
90279		12	6,2 x 11 x 6,2	20 x 13 x 39	0,010	1,43	864	8 000625 902798

# A PROFESSIONAL RANGE

The quality and simplicity of Claber products are what make them the ideal solution for professionals too.

Turbine sprinklers, solenoid valves, timers take underground irrigation anywhere.



## 24 V - 1" FEMALE SOLENOID VALVE

**90938**



Solenoid with silt filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90938		12	-	28 x 19 x 25	0,013	4,54	-



## 24 V - 1" MALE SOLENOID VALVE

**90939**



Solenoid with silt filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90939		12	-	28 x 19 x 25	0,013	4,36	-



## CONTROL UNIT

**8188**

From a field station, the unit will pilot the opening and closing movements of one or two 9V bistable solenoid valves installed in valve boxes.  
 Connected to a RAIN SENSOR (CODE 90915), the unit will suspend watering operations in the event of rainfall greater than 5 mm per square metre.  
 The control unit can be wall-mounted, using a special bracket, for ease of programming and practical maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
8188		6	-	30 x 14 x 25	0,01	2,84	-



## 1" F. PROGRAMMABLE SOLENOID VALVE

**90928**

Can be installed directly on the tap or water well outlet.  
 Protected by 100% sealed cover operates also in total submersion.  
 Easy to program with three keys only.  
 Irrigation time from 1 min to 23 h. 59 min.  
 With option of up to 6 irrigation cycles per day.  
 Manual and weekly programming with exclusion of specific weekdays as required.  
 Bistable 9 V solenoid with low power consumption.  
 Operates with a 9 V battery, sufficient for an entire season.  
 Electronic section separable from hydraulic section for easy programming or storage during winter.  
 Operating pressure from 0,5 to 12 bar.  
 1" female inlet and outlet thread.  
 Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90928		6	-	30 x 16 x 25	0,012	4,42	-



### ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 2"

90000



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Height from ground 2" (5 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90000		100		27 x 25 x 24	0,016	5,02	



### ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 2"

90001



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (10 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Height from ground 2" (5 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90001		100		27 x 25 x 24	0,016	4,98	



### ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 4"

90015



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Ground height of 4" (10 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90015		50		27 x 19 x 24	0,012	3,30	



### ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 4"

90016



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (10 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Ground height of 4" (10 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90016		50		27 x 19 x 24	0,012	3,30	



### SPRINKLER BODY

90142



90143



90144



90142 2" - 5 cm  
90143 3" - 7,5 cm  
90144 4" - 10 cm

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90142		100		27 x 25 x 24	0,016	4,53	



90143		50		27 x 16 x 24	0,010	2,70	
-------	--	----	--	--------------	-------	------	--



90144		50		27 x 19 x 24	0,012	3,07	
-------	--	----	--	--------------	-------	------	--



0°-350°  
ADJUSTABLE HEAD

**90003** - 6 L/MIN



**90145** - 10 L/MIN



Made of shock-resistant ABS plastic.  
Filter with support provided.  
Stainless steel jet range adjustment screw.  
Compatible with other brand sprinklers.  
Bag of 25 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90003		1 x 25		18,5 x 9,5 x 12,5	0,002	0,25	8
90145		1 x 25		18,5 x 9,5 x 12,5	0,002	0,25	8

LONG-JET TURBINE  
SPRINKLER

**90154**



Large jet turbine sprinkler with 9 interchangeable nozzles. Adjustable between 40° and 360° with continuous rotation. Adjustable jet with proportional reduction of the flow rate to ensure optimal uniformity of distribution and reduce consumption by up to 30%. Slits to remove any sand contained in the water. Pull-out internal filter. Silent thanks to internal lubrication. Protrudes 5" (12.5 cm) from earth. 3/4" (20-27 mm) F threaded base. Rubber cover to ensure a long product life by preventing any impurities from getting in. Provided with adjustment key. Maximum watering area 670 m<sup>2</sup>.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90154		20		34 x 20 x 34	0,023	7,09	8



40°-360°					40°-360°					40°-360°				
BAR		I/min	r		BAR		I/min	r		BAR		I/min	r	
2	1	4,5	r 10,1 m	14,3 m	3	1	5,1	r 10,1 m	14,2 m	4	1	6,8	r 10,1 m	14,2 m
	1,5	5,7	r 11,0 m	15,5 m		1,5	7,0	r 11,3 m	15,9 m		1,5	8,3	r 11,6 m	16,4 m
	2	6,8	r 10,7 m	15,1 m		2	8,7	r 10,7 m	15,1 m		2	11,0	r 11,6 m	16,4 m
	2,5	9,5	r 11,3 m	15,9 m		2,5	11,8	r 11,6 m	16,4 m		2,5	14,4	r 12,2 m	17,2 m
	3	11,4	r 11,0 m	15,5 m		3	13,5	r 11,3 m	15,9 m		3	16,7	r 12,5 m	17,6 m
	4	15,1	r 11,3 m	15,9 m		4	17,8	r 11,9 m	16,8 m		4	21,2	r 12,2 m	17,2 m
	5	18,2	r 11,3 m	15,9 m		5	22,2	r 11,6 m	16,4 m		5	27,3	r 13,1 m	18,5 m
	6	22,7	r 12,2 m	17,2 m		6	26,2	r 12,5 m	17,6 m		6	31,8	r 13,4 m	18,9 m
8	29,9	r 11,6 m	16,4 m	8	35,9	r 13,4 m	18,9 m	8	42,0	r 14,0 m	19,8 m			

MEDIUM-JET TURBINE  
SPRINKLER

**90152**



Medium-jet turbine sprinklers with interchangeable nozzles.  
A working range that can be adjusted from 40° to 360°, with just a simple cross-head screwdriver, a pointer on the lid showing the selected work arc.  
The sprinkler can be regulated before installation, after installation in a static position, or during operation.  
A special mechanism avoids damage to the gears during regulation. Internal removable filter.  
Running pressure from 1.5 to 4 bars. Radius from 4 to 9 m. 1/2" screw base.  
Height from ground 4" (10 cm).  
Irrigated area max 254 m<sup>2</sup>.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)	pcs/pallet
90152		25		28 x 19 x 25	0,013	3,93	8



40°-360°					40°-360°					40°-360°				
BAR		I/min	r		BAR		I/min	r		BAR		I/min	r	
1	0,75	2,7	r 4,8 m	6,8 m	2	0,75	2,8	r 5,0 m	7,1 m	3	0,75	3,1	r 5,2 m	7,4 m
	1	4,4	r 5,8 m	8,2 m		1	4,8	r 5,9 m	8,3 m		1	5,8	r 6,3 m	8,9 m
	1,5	4,5	r 6,7 m	9,5 m		1,5	5,1	r 6,9 m	9,8 m		1,5	6,7	r 7,2 m	10,2 m
	2	6,0	r 7,2 m	10,2 m		2	6,6	r 7,5 m	10,6 m		2	8,3	r 8,1 m	11,5 m
	3	9,4	r 8,0 m	11,3 m		3	10,0	r 8,4 m	11,9 m		3	11,8	r 9,0 m	12,7 m

# MERCHANDISING

With Claber, it is easy to turn any shop into a specialist irrigation centre.

Claber enlarges its range of display boxes with the the new targeted display solutions for Claber water timers as well as for drip irrigation kits and the new Happy Fresh cooling systems.



MULTI BOX

9447



Multi Box is the most versatile and immediate solution for "out of gondola unit" display use. Made of tough 70% recycled cardboard, contained in a compact package, very easy to assemble, it is made up of a base and three shelves, to display Claber products and dispenser.

Measurements of assembled stand:  
55 x 40 x 140 cm

code	packaging	qty	pack size (cm)
9447		1	40 x 100 x 9
box size (cm)	volume (m <sup>3</sup> )	weight (kg)	
40 x 100 x 9	0,036	4,80	

VISUAL BOX

9449



The new Visual Box tall stand is made of 70% recycled cardboard. It has three large drawers in transparent PVC, each one divided into two compartments, to double your options when it comes to displaying Claber products effectively: from connectors to couplings, and spray nozzles to pistols and sprinklers. The stand is pre-assembled and ready to use right away.

Measurements of assembled stand:  
40 x 39 x 150 cm

code	packaging	qty	pack size (cm)
9449		1	40 x 39 x 120
box size (cm)	volume (m <sup>3</sup> )	weight (kg)	
40 x 39 x 120	0,190	5,40	

ESPO PROMO MONOFACE

9454



70% recycled cardboard stand specifically for off-shelf promotion of blister pack products, even small ones. High visibility of product. Hook positioning flexible and customizable. Equipped with 30 hooks and a removable shelf 25 cm from the base. Easy to assemble. Small pack size.

Measurements of assembled stand:  
59 x 40 x 109 cm

code	packaging	qty	pack size (cm)
9454		1	59 x 40 x 109
box size (cm)	volume (m <sup>3</sup> )	weight (kg)	
59 x 39 x 98	0,225	7,00	

## ESPO AQUAUNO

9548



This is a specific "off-gondola" stand for displaying the water timers of the Aquauno, Aquauno Plus and Aquadue Duplo Evolution range. Supplied empty and unassembled in a compact package, Espo Aquauno is very easy to put up and ready to use immediately. Fully made of 70% recycled cardboard, it is provided with two interchangeable crowners: one for the new Aquauno Mist (8496) timer, the other a general one for Claber tap timers.

Three different filling options:

- Aquauno timers: 30 pcs (3 x 10 pcs)
- Aquauno Plus timers: 24 pcs (3 x 8 pcs)
- Aquadue Duplo timer: 24 pcs (3 x 8 pcs)

Measurements of assembled stand: 32 x 38,5 x 133 cm

code	packaging	qty	pack size (cm)
9548		1	87 x 76 x 5
box size (cm)	volume (m <sup>3</sup> )	weight (kg)	
87 x 76 x 5	0,030	3,80	

## ESPO KIT

9549



One "off-gondola" stand suitable for displaying Claber drip irrigation kits, Aqua-Magic Systems and the new Happy Fresh cooling system kits. Supplied empty and unassembled in a compact package, Espo Kit is very easy to put up and ready to use immediately. Fully made of 70% recycled cardboard, it is provided with three interchangeable crowners: one for the drip irrigation kits, one for the Aqua-Magic System, and the other for the kits in the Happy Fresh range.

Different filling options:

- 8063: 10 pcs (2 x 5 pcs)
- 90751: 16 pcs (2 x 8 pcs)
- 90752: 10 pcs (2 x 5 pcs)
- 90753: 10 pcs (2 x 5 pcs)
- 90763: 10 pcs (2 x 5 pcs)
- 90766: 10 pcs (2 x 5 pcs)
- 90759: 10 pcs (2 x 5 pcs)
- 90764: 16 pcs (2 x 8 pcs)

Measurements of assembled stand: 32 x 38,5 x 133 cm

code	packaging	qty	pack size (cm)
9549		1	87 x 76 x 5
box size (cm)	volume (m <sup>3</sup> )	weight (kg)	
87 x 76 x 5	0,030	3,60	

DISPLAY BOX (3 PCS.)

8849



Claber's new display unit-dispensers for loose products allow a tidy, linear presentation of store shelf and rack references.

Dimensions: 37 x 20 x 35 cm

code	packaging	qty	pack size (cm)	box size (cm)	volume (m <sup>3</sup> )	weight (kg)
8849		1	60 x 55 x 2,5	60 x 55 x 2,5	0,008	1,50

CLABER GUIDE  
PUB1094850011



LEAFLET DISPLAY BOX  
PUB1094110000



SHOPPER  
PUB1091060000



# SALES POINTS: THE CLABER AISLE NEVER GOES UNNOTICED

In stores, on the aisles devoted to gardening, Claber products catch the attention and are easy to recognise at a glance. Pleasing colours and graphics full of impact distinguish between the three ranges dedicated to drip, above-ground and underground irrigation. The arrangement of the products and the design of the packaging direct the consumer to choose the correct product and help create a system that's a perfect size for their requirements. An additional bonus that starts in store is a space that's beautiful to look at and easy to manage.



ABOVE-GROUND IRRIGATION



DRIP IRRIGATION



UNDERGROUND IRRIGATION



# ABOVE-GROUND, DRIP, UNDERGROUND, CLABER PANELS

Dimensions: 100x40 cm


**PUB1090940000**  
ABOVE-GROUND INFORMATIVE PANEL




**PUB1092020000**  
ABOVE-GROUND PANEL




**PUB1092000000**  
DRIP INFORMATIVE PANEL

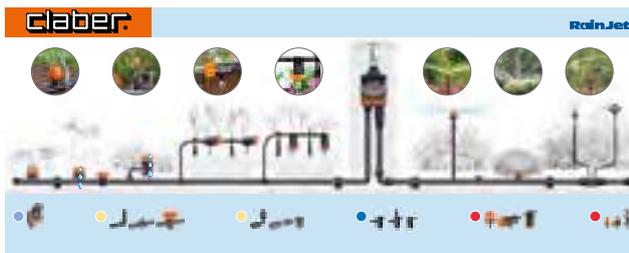

**PUB1092030000**  
DRIP PANEL

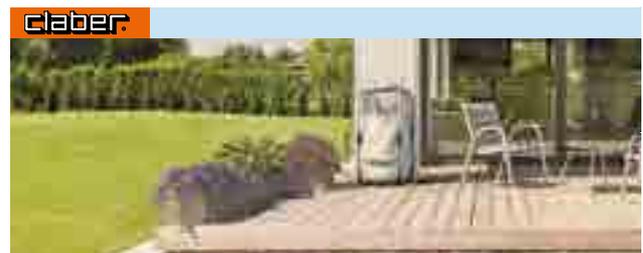

**PUB1092010000**  
UNDERGROUND INFORMATIVE PANEL

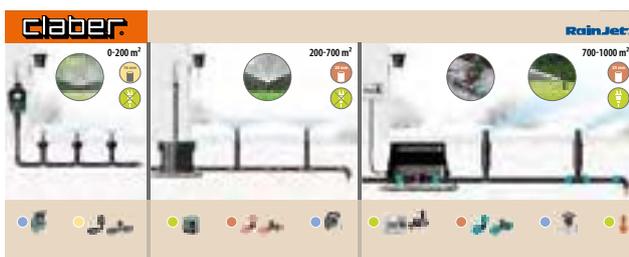

**PUB1092040000**  
UNDERGROUND PANEL



**PUB1095470000**  
CLABER PANEL



Code	Description	Page	Qty	Code	Description	Page	Qty
8022	AQUA-HOME	143	1	8560	MENDER 1/2"	22	30
8052	IDRIS SPIKE	129	12	8561	MENDER 1/2"	22	12
8054	OASIS EVOLUTION	 130	1	8562	MENDER 5/8" HOSE	18	30
8058	MULTIPLA AC 230/24 V LCD	142	1	8563	MENDER 5/8" HOSE	18	10
8060	MULTIPLA DC 9 V LCD	142	1	8564	UNIVERSAL MENDER 1/2"-5/8"-3/4"	22	40
8061	AQUA-MAGIC TANK	127	1	8565	UNIVERSAL MENDER 1/2"-5/8"-3/4"	22	10
8062	AQUALUX SYSTEM	131	1	8566	5/8" AUTOMATIC COUPLING W / AQUASTOP	21	50
8063	AQUA-MAGIC SYSTEM	127	1	8567	5/8" AUTOMATIC COUPLING W / AQUASTOP	21	12
8064	SPARE DRIPPERS	127	10	8568	5/8" AUTOMATIC COUPLING	20	50
8068	10 m HOSE 1/4" (4-6 mm)	127	4	8569	5/8" AUTOMATIC COUPLING	20	12
8080	SPRAYER 1,5 L	NEW 69	6	8580	4 OUTLETS DISTRIBUTOR	15	8
8081	SPRAYER 2 L	NEW 69	6	8581	4 OUTLETS DISTRIBUTOR	15	5
8410	AQUADUE DUPLO EVOLUTION	93	2	8583	KOALA QUICK-CLICK	17	8
8412	AQUAUNO VIDEO-2 PLUS	92	2	8587	3/4" (20-27 mm) QUICK-FIT TAP CONNECTOR	17	10
8413	AQUAUNO VIDEO-6 PLUS	92	2	8589	3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER	15	5
8419	AQUAUNO LOGICA PLUS	92	2	8590	3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER	15	8
8421	MANUAL TAP TIMER	NEW 89	4	8591	MULTITHREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	14	100
8422	AQUAUNO LOGICA	89	2	8592	1"-3/4" ANGLED TAP CONNECTOR	17	8
8423	AQUAUNO SELECT	90	2	8595	MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)	15	40
8425	AQUAUNO PRATICO	89	2	8597	3/4" (20-27 mm) TAP CONNECTOR METAL	17	14
8428	AQUAUNO VIDEO-2	90	2	8598	DOUBLE TAP CONNECTOR	15	25
8480	RF RAIN SENSOR INTERFACE	95	2	8599	DOUBLE TAP CONNECTOR	15	8
8483	TEMPO LOGIC	94	2	8601	COUPLING WITH SHUT-OFF VALVE	20	8
8485	DUAL LOGIC	95	2	8602	1/2" AUTOMATIC COUPLING W / AQUASTOP	21	50
8486	TEMPO SELECT	94	2	8603	1/2" AUTOMATIC COUPLING W / AQUASTOP	21	14
8488	DUAL SELECT	95	2	8604	3/4" AUTOMATIC COUPLING W / AQUASTOP	21	50
8496	AQUAUNO MIST	71/90	2	8605	3/4" AUTOMATIC COUPLING W / AQUASTOP	21	12
8497	TEMPO MYAQUASOLAR	97	2	8606	1/2" AUTOMATIC COUPLING	20	50
8498	DUAL MYAQUASOLAR	97	2	8607	1/2" AUTOMATIC COUPLING	20	14
8509	1" F (26-34 mm) - 3/4" M (20-27 mm) ADAPTER	15	12	8608	3/4" AUTOMATIC COUPLING	20	50
8525	SMOOTH TAP CONNECTOR	17	10	8609	3/4" AUTOMATIC COUPLING	20	12
8534	PRO SPRAY NOZZLE	29	15	8611	CONNECTOR WITH SHUT-OFF VALVE	19	8
8535	PRO SPRAY NOZZLE	29	5	8612	TWO-WAY CONNECTOR	19	100
8536	PLUS SPRAY NOZZLE	29	15	8613	TWO-WAY CONNECTOR	19	14
8537	PLUS SPRAY NOZZLE	29	5	8614	THREE-WAY CONNECTOR	19	40
8538	ERGO SPRAY PISTOL	26	15	8615	THREE-WAY CONNECTOR	19	12
8539	ERGO SPRAY PISTOL	26	10	8616	JET SPRAY NOZZLE	29	50
8541	ERGO SHOWER PISTOL	27	4	8617	JET SPRAY NOZZLE	29	8
8542	COUPLING 1/2"-5/8"	23	50	8618	MENDER 1/2" HOSE	18	50
8543	COUPLING 1/2"-5/8"	23	12	8619	MENDER 1/2" HOSE	18	14
8544	COUPLING 1/2"-5/8" W/AQUASTOP	23	25	8620	MENDER 3/4" HOSE	18	50
8545	COUPLING 1/2"-5/8" W/AQUASTOP	23	12	8621	MENDER 3/4" HOSE	18	10
8546	UNIVERSAL COUPLING 1/2"-5/8"-3/4"	23	40	8622	1/2" (15-21mm) THREADED TAP CONNECTOR	14	50
8547	UNIVERSAL COUPLING 1/2"-5/8"-3/4"	23	10	8623	1/2" (15-21mm) THREADED TAP CONNECTOR	14	14
8548	UNIVERSAL COUPLING 1/2"-5/8"-3/4" W / AQUASTOP	23	20	8626	3/4" (20-27 mm) THREADED TAP CONNECTOR	14	100
8549	UNIVERSAL COUPLING 1/2"-5/8"-3/4" W / AQUASTOP	23	10	8627	3/4" (20-27 mm) THREADED TAP CONNECTOR	14	14
8551	STARTER SET 1/2"	26	6	8628	1" (26-34 mm) THREADED TAP CONNECTOR	14	100
8556	TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	22	50	8629	1" (26-34 mm) THREADED TAP CONNECTOR	14	12
8557	TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	22	12	8636	SPRINKLER CONNECTOR 3/4" M.	19	50
8558	TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)	22	40	8637	SPRINKLER CONNECTOR 3/4" M.	19	14
8559	TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)	22	10	8654	MULTIFUNCTION SPRINKLER	44	3

Code	Description	Page	Qty
8656	ROLLINA	44	5
8658	TURBOSPRUZZO	44	6
8660	TURBOSPIKE	44	12
8661	SPIKE-JET	46	5
8662	VARIO-JET	46	5
8663	SPRAY-JET	46	5
8675	IDROSPRAY 2000	45	2
8685	AQUALUX 2000	45	4
8690	ROTOROLL EVOLUTION FLOOR STAND	63	1
8692	ROTOROLL EVOLUTION 10 m	63	1
8694	IDROJET 2000	45	4
8696	ROTOROLL EVOLUTION 20 m	63	1
8697	ROTOROLL EVOLUTION 30 m	63	1
8705	3/4" (20-27 mm) IMPACT FEMALE HEAD	48	5
8707	IMPACT ON STAKE	49	5
8708	IMPACT PLASTIC SPIKE	49	5
8709	IMPACT TRIPOD	49	4
8711	WALL BRACKETS	53	10
8713	BAG CLAMPS	66	10
8715	IMPACT TRIPOD KIT	49	2
8740	COMPACT-160 PROMO	43	4
8743	COMPACT-16 SUPER METAL	43	3
8748	COMPACT-12	43	3
8753	COMPACT-20 AQUA CONTROL	43	3
8756	SPRAY PISTOL	26	5
8757	WASHING PISTOL	67	12
8774	WIPPY CAR	67	4
8800	NOZZLE AND COUPLING SET	29	10
8802	STARTER SET Ø 1/2"	29	8
8803	MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)	15	12
8804	MULTI THREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	14	14
8811	O-RING AND WASHER SET	19	15
8813	TAP CONNECTOR AND 1/2" COUPLING SET	21	10
8818	1/2" HOSE CONNECTION SET	21	8
8827	STARTER SET Ø 3/4"	29	8
8843	WIPPY AUTO	67	2
8845	1/2" (12,5 mm) SILVER ELEGANT PLUS HOSE KIT 15 m	76	1
8849	DISPLAY BOX (3 PCS.)	181	1
8856	5/8" (15 mm) SILVER ELEGANT PLUS HOSE KIT 15 m	76	1
8858	GENIUS COMPACT PRONTO 25	59	12
8862	GENIUS 60	57	1
8864	KIT PRONTO 30	57	1
8865	METAL JUNIOR PRONTO AQUAVIVA 25	59	12
8866	ECO 0	52	8
8872	GENIUS 100	57	1
8884	AQUAPONY KIT	53	1
8887	AQUAPONY	53	1
8890	METAL 40	60	1
8891	METAL 60	60	1
8894	METAL GEMINI	61	1
8895	METAL PROFY	61	1

Code	Description	Page	Qty
8900	JUMBO	61	1
8904	SET OF 10 CLABER BAGS	66	10
8917	FAN SPRAY	27	4
8921	KIROS	53	1
8922	LONG FAN SPRAY	27	2
8933	QUBO PRONTO AQUAVIVA 20	58	8
8934	CARRY CART ECO	66	1
8945	KIROS KIT	53	1
8956	MALIBÙ	67	3
8962	EXTENSION	55	12
8966	SPRAY PISTOL	26	16
8974	SET AQUAPASS	53	1
8977	SILVER-AL	55	1
8980	ECOSEI	54	1
8981	ECOSEI KIT	54	1
8985	GENIUS COMPACT PRONTO AQUAVIVA 20	59	12
9003	AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 15	77	1
9004	AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 25	77	1
9005	AQUAVIVA PLUS Ø 5/8" (15 mm) m 15	77	1
9006	AQUAVIVA PLUS Ø 5/8" (15 mm) m 25	77	1
9008	AQUAVIVA PLUS Ø 3/4" (19 mm) m 25	77	1
9025	9 - 13 mm AUTOMATIC COUPLING	20/83	10
9026	9 - 13 mm AUTOMATIC COUPLING W / AQUASTOP	21/83	10
9028	MINI-SET UTILITY	52	1
9031	MINI-SET BALCONY	52	1
9034	SPIRAL KIT BASIC 10 m	83	6
9036	TOP-BLACK Ø 1/2" (12,5 mm) m 50	73	1
9037	TOP-BLACK Ø 1/2" (12,5 mm) m 15	73	1
9040	TOP-BLACK Ø 5/8" (15 mm) m 15	73	1
9043	TOP-BLACK Ø 5/8" (15 mm) m 50	73	1
9045	TOP-BLACK Ø 3/4" (19 mm) m 50	73	1
9048	TOP-BLACK Ø 3/4" (19 mm) m 25	73	1
9064	TOP-BLACK Ø 1/2" (12,5 mm) m 25	73	1
9065	TOP-BLACK Ø 5/8" (15 mm) m 25	73	1
9081	ELEGANT DUAL JET PISTOL	28	4
9083	ELEGANT MULTIFUNCTION PISTOL	28	4
9086	ELEGANT TELESCOPIC MULTIFUNCTION LANCE	28	2
9088	ELEGANT MULTIFUNCTION PISTOL 5 JETS	28	4
9089	ELEGANT MULTIFUNCTION NOZZLE 5 JETS	28	6
9120	AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 10	77	1
9123	SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 15	75	1
9124	SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 25	75	1
9125	SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 15	75	1
9126	SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 25	75	1
9127	SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 50	75	1
9128	SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 25	75	1
9129	SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 50	75	1
9131	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 15	74	1
9133	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 50	74	1
9136	FLEXYFORT GREEN Ø 5/8" (15 mm) m 50	74	1
9138	FLEXYFORT GREEN Ø 3/4" (19 mm) m 50	74	1

Code	Description	Page	Qty	Code	Description	Page	Qty
9141	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 25	74	1	9650	1" MAX-FLOW COUPLING	33	6
9142	FLEXYFORT GREEN Ø 5/8" (15 mm) m 15	74	1	9651	1" MAX-FLOW MENDER	33	6
9145	FLEXYFORT GREEN Ø 5/8" (15 mm) m 25	74	1	9652	MAX-FLOW ADJUSTABLE NOZZLE	34	6
9149	FLEXYFORT GREEN Ø 3/4" (19 mm) m 25	74	1	9654	1" M THREADED MAX-FLOW ADAPTOR	31	10
9336	TWIDDY 15 m	81	6	9655	1"1/4 - 1" MAX-FLOW TAP CONNECTOR	31	6
9337	TWIDDY 25 m	81	4	9656	MAX-FLOW STARTER KIT 3/4" (19 mm)	34	5
9338	SPIRAL KIT PLUS 15 m	83	3	9657	MAX-FLOW O-RING AND WASHERS SET	32	10
9373	GARDEN SPRAY PISTOL	27	5	9658	MASTER PRO NOZZLE	35	3
9391	ERGO-GARDEN SPRAY PISTOL	27	8	90004	0° - 350° - 2" ADJUSTABLE POP-UP (5 cm)	151	24
9447	MULTI BOX	179	1	90005	0° - 350° - 3" ADJUSTABLE POP-UP (7,5 cm)	151	24
9449	VISUAL BOX	179	1	90006	0° - 350° - 4" ADJUSTABLE POP-UP (10 cm)	151	24
9454	ESPO PROMO MONOFACE	179	1	90007	0° - 350° ADJUSTABLE HEAD	151	12
9548	ESPO AQUAUNO	180	1	90019	ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 4" (10 cm)	151	24
9549	ESPO KIT	180	1	90020	ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 2" (5 cm)	151	24
9561	PRECISION CONFORT	25	3	90041	360° JET POP-UP - 2" (5 cm)	152	12
9563	MULTI - JET CONFORT	25	3	90043	360° JET POP-UP - 4" (10 cm)	152	12
9565	BALCONY CONFORT	25	3	90044	360° HEAD	152	12
9567	METAL - JET CONFORT	25	3	90053	180° JET POP-UP - 2" (5 cm)	152	12
9601	3/4" M (20-27 mm) THREADED ADJUSTABLE TWO-WAY ADAPTER	37	4	90055	180° JET POP-UP - 4" (10 cm)	152	12
9602	ADJUSTABLE TWO-WAY TAP CONNECTOR	37	4	90056	180° HEAD	152	12
9603	1" (26-34 mm) TAP CONNECTOR WITH 3/4" (20-27 mm) ADAPTER	37	10	90095	90° JET POP-UP - 2" (5 cm)	153	12
9604	3/4" (20-27 mm) TAP CONNECTOR	37	10	90097	90° JET POP-UP - 4" (10 cm)	153	12
9605	1/2" (15 - 21 mm) TAP CONNECTOR	37	10	90098	90° HEAD	153	12
9606	TWO-WAY CONNECTOR	38	10	90109	CENTRE-STRIP POP-UP - 4" (10 cm)	154	12
9607	THREE-WAY CONNECTOR	38	8	90110	CENTRE-STRIP HEAD	154	12
9608	1/2" M (15 - 21 mm) CONNECTOR	38	10	90121	END-STRIP POP-UP - 4" (10 cm)	155	12
9609	3/4" M (20 - 27 mm) CONNECTOR	38	10	90122	END-STRIP HEAD	155	12
9610	1/2"-5/8" AUTOMATIC COUPLING	39	8	90123	SET OF SPARE POP-UP AND COLIBRÌ FILTERS	155	12
9611	1/2"-5/8" AUTOMATIC COUPLING W / STOP	39	8	90124	SET OF POP-UP SPARE PARTS	155	12
9612	1/2"-5/8" MENDER	39	8	90133	SQUARE AREA POP-UP - 4" (10 cm)	154	12
9613	3/4" AUTOMATIC COUPLING	39	8	90134	SQUARE AREA HEAD	154	12
9614	3/4" AUTOMATIC COUPLING W/STOP	39	8	90200	COLIBRÌ STARTER KIT	140	1
9615	3/4" MENDER	39	8	90210	360° COLIBRÌ MICRO-SPRINKLER	139	12
9618	BASIC METAL MULTIFUNCTION PISTOL	40	4	90220	180° COLIBRÌ MICRO-SPRINKLER	139	12
9619	BASIC METAL PISTOL	40	5	90230	90° COLIBRÌ MICRO-SPRINKLER	139	12
9620	SPRAY NOZZLE WITH ADJUSTABLE JET	40	8	90250	GUARD COLLAR	139	10
9621	SPRAY PISTOL	40	4	90264	TURBO-JET 80°-360° - 3"	141	12
9622	8 PATTERNS MULTIFUNCTION PISTOL	40	4	90266	TURBO-JET 80°-360° - 4"	141	12
9623	IMPACT METAL-JET SPIKE	41	3	90270	ELBOW CONNECTOR Ø 32 mm	172	8
9624	1/2" METAL OUTDOOR TAP	36	5	90271	COUPLING Ø 32 mm 1" (26-34 mm) THREAD	172	20
9625	1/2" METAL OUTDOOR TAP WITH DOUBLE OUTLET	36	5	90272	T Ø 32 mm CONNECTORS	172	5
9626	METAL-JET MULTIFUNCTION LANCE	41	2	90273	ELBOW Ø 32 mm F. 3/4" (20-27 mm) THREAD	173	12
9641	1" - 3/4" MAX-FLOW TAP CONNECTOR	31	8	90274	CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD	172	10
9642	3/4" M THREADED MAX-FLOW ADAPTOR	31	10	90275	COUPLING Ø 32 mm	172	12
9643	2-WAY MAX-FLOW CONNECTOR	32	10	90276	BRACKET COUPLING FOR Ø 32 mm HOSE	164	7x2
9644	2-WAY CONNECTOR MAX-FLOW TO STANDARD	32	10	90277	END-OF-LINE PLUG Ø 32 mm	173	12
9645	3-WAY MAX-FLOW CONNECTOR	32	10	90279	Ø 25 mm - Ø 32 mm COUPLING	173	12
9646	3 WAY CONNECTOR MAX-FLOW TO STANDARD	32	10	90318	1" (26-34 mm) M. THREADED CONNECTOR Ø 20 mm	168	20
9647	3/4" MAX-FLOW COUPLING	33	8	90319	1" (26-34 mm) F. THREADED CONNECTOR Ø 20 mm	168	20
9648	3/4" MAX-FLOW MENDER	33	8	90320	F. 3/4" (20-27 mm) - 1/2" THREADED CONNECTOR (15-21 mm) Ø 20 mm	168	20
9649	3/4" - 1" MAX-FLOW MENDER	33	6	90321	COUPLING Ø 20 mm	168	15

Code	Description	Page	Qty
90322	ELBOW CONNECTOR Ø 20 mm	168	15
90323	T Ø 20 mm	168	10
90324	1/2" (15-21 mm) M. THREADED ELBOW Ø 20 mm	169	20
90325	1/2" (15-21 mm) M. THREADED T CONNECTOR Ø 20 mm	169	15
90326	3/4" (20-27 mm) F. THREADED ELBOW Ø 20 mm	169	20
90327	END-OF-LINE PLUG Ø 20 mm	169	20
90328	Ø 16 mm - Ø 20 mm COUPLING	169	20
90329	Ø 20 mm WALL PLATE ELBOW	169	10
90350	1/2" SOAKER HOSE 15 m	104	1
90351	1/2" SOAKER HOSE 25 m	104	1
90353	1/4" DRIPPER TUBE 15 m	102	5
90354	2,1 L/H SELF-REGULATING DRIPPER TUBE 25 m	102	1
90355	DRIPPER TUBE 25 m	102	1
90356	DRIPPER TUBE 25 m BROWN	102	1
90357	DRIPPER TUBE 50 m	102	1
90362	MAIN TUBE 15 m	101	1
90365	MAIN TUBE 25 m	101	1
90366	MAIN TUBE 50 m	101	1
90368	MAIN TUBE 25 m WHITE	101	1
90370	FEEDING TUBE 20 m	100	5
90371	FEEDING TUBE 5 m	100	14
90372	PE TUBE Ø 20 mm 15 m	167	1
90373	PE TUBE Ø 20 mm 25 m	167	1
90374	CONNECTOR Ø 32 mm F. 1" (26-34 mm) THREAD	172	12
90375	FEEDING TUBE 20 m GREEN	100	5
90376	TRIPLY 7,5 m	105	3
90377	TRIPLY 15 m	105	3
90380	PE TUBE Ø 25 mm 25 m	167	1
90385	PE TUBE Ø 25 mm 50 m	167	1
90390	PE TUBE Ø 32 mm 25 m	167	1
90395	PE TUBE Ø 32 mm 50 m	167	1
90416	T Ø 32 mm 3/4" (20-27 mm) THREAD	173	5
90417	ELBOW CONNECTOR Ø 25 mm	170	7
90418	T Ø 25 mm 3/4" (20-27 mm) THREAD	171	6
90419	COUPLING Ø 25 mm	170	9
90420	COUPLING Ø 25 mm 1" (26-34 mm) THREAD	170	15
90421	COUPLING Ø 25 mm 3/4" (20-27 mm) THREAD	170	15
90422	T Ø 25 mm CONNECTORS	170	4
90423	ELBOW Ø 25 mm F. 3/4" (20-27 mm) THREAD	171	12
90424	CONNECTOR Ø 25 mm - F. 3/4" (20-27 mm) THREAD	170	15
90425	END-OF-LINE PLUG Ø 25 mm	171	15
90426	ELBOW CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD	173	8
90427	ELBOW CONNECTOR Ø 25 mm F. 1/2" (15-21 mm) THREAD	171	7
90428	Ø 20 mm - Ø 25 mm COUPLING	171	12
90429	Ø 25 mm WALL PLATE ELBOW	171	10
90450	BRACKET COUPLING FOR Ø 25 mm HOSE	164	8x2
90474	MEDIUM-JET TURBINE SPRINKLER	157	12
90478	LONG-JET TURBINE SPRINKLER	157	8
90480	MULTI-JET TURBINE WITH LONG JET RANGE	157	8
90500	CIRCULAR VALVE BOX	166	1
90510	RECTANGULAR VALVE BOX	166	1

Code	Description	Page	Qty
90515	RECTANGULAR VALVE BOX	166	1
90520	HYDRANT VALVE BOX	166	3
90524	CONNECTOR Ø 25 mm - F. 1" (26-34 mm) THREAD	170	10
90701	1" M (26-34 mm) x 3/4" M (20-27 mm) NIPPLE	162	40
90702	3/4" M (20-27 mm) x 3/4" M (20-27 mm) NIPPLE	162	40
90703	3/4" M (20-27 mm) x 1/2" M (15-21 mm) NIPPLE	162	40
90704	3/4" F (20-27 mm) x 1/2" F (15-21 mm) COUPLING	161	40
90705	1" F (26-34 mm) x 3/4" F (20-27 mm) COUPLING	161	20
90706	3/4" F (20-27 mm) x 3/4" F (20-27 mm) COUPLING	161	40
90707	1/2" F (15-21 mm) x 1/2" F (15-21 mm) COUPLING	161	40
90708	1" F (26-34 mm) x 1" F (26-34 mm) COUPLING	161	20
90709	3/4" F (20-27 mm) x 3/4" F (20-27 mm) ELBOW	161	20
90710	1" F (26-34 mm) x 1" F (26-34 mm) ELBOW	161	20
90711	1" F (26-34 mm) T CONNECTOR	161	20
90712	3/4" F (20-27 mm) T CONNECTOR	161	20
90713	3/4" (20-27 mm) M THREADED CAP	162	40
90714	1/2" (15-21 mm) M THREADED CAP	162	20
90715	1" (26-34 mm) M THREADED CAP	162	40
90720	Ø 1/2" (15-21 mm) - 1/2" (15-21 mm) THREADED EXTENSION	163	50
90721	Ø 3/4" (20-27 mm) - 1/2" (15-21 mm) THREADED EXTENSION	163	50
90722	Ø 3/4" (20-27 mm) - 3/4" (20-27 mm) THREADED EXTENSION	163	50
90746	FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 1/2" (15-21 mm)	163	8
90747	FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 3/4" (20-27 mm)	163	8
90751	HAPPY FRESH EVOLUTION KIT 7,5 m	71	4
90752	HAPPY FRESH EVOLUTION KIT 12 m	71	1
90753	HAPPY FRESH EVOLUTION KIT 12 m W/TIMER	71	1
90759	DRIP KIT PLUS 25 POTS	121	1
90763	TIMER KIT 20 PRATICO	122	1
90764	DRIP STARTER KIT	121	4
90766	TIMER KIT 20 LOGICA	121	1
90767	ORTO DRIP KIT	120	1
90772	TERRAZZO DRIP KIT	122	1
90801	1/2" FEMALE THREADED CAP (15-21 mm)	162	20x2
90802	3/4" FEMALE THREADED CAP (20-27 mm)	162	20x2
90803	1" (26-34 mm) F. x 1" (26-34 mm) M. COUPLING	160	10
90805	1" (26-34 mm) M. x 1" (26-34 mm) M. NIPPLE	162	40
90807	1" (26-34 mm) F. x 1" (26-34 mm) M. ELBOW	160	10
90808	T 1" (26-34 mm) F. x 1" (26-34 mm) F. x 1" (26-34 mm) M.	160	10
90809	1" (26-34 mm) M. 3/4" (20-27 mm) F. REDUCER	162	30
90812	9 V - 1" (26-34 mm) FEMALE SOLENOID VALVE	147	1
90813	9 V - 1" (26-34 mm) MALE SOLENOID VALVE	147	1
90814	24 V - 1" (26-34 mm) FEMALE SOLENOID VALVE	147	1
90815	24 V - 1" (26-34 mm) MALE SOLENOID VALVE	147	1
90821	CONTROL UNIT	146	1
90826	1" (26-34 mm) F. PROGRAMMABLE SOLENOID VALVE	146	1
90829	HYDRO-4	145	1
90831	RAIN SENSOR RF	95/145	1
90858	BRACKET COUPLING FOR TUBE Ø 20 mm HOSE	164	10x2
90910	DRAINAGE VALVE	160	15
90915	RAIN SENSOR	93/143	2
90917	Ø 1" (26-34 mm) F. MANUAL VALVE	164	5



Code	Description	Page	Qty
PUB1090940000	ABOVE-GROUND INFORMATIVE PANEL	183	
PUB1091060000	SHOPPER	181	
PUB1092000000	DRIP INFORMATIVE PANEL	183	
PUB1092010000	UNDERGROUND INFORMATIVE PANEL	183	
PUB1092020000	ABOVE-GROUND PANEL	183	
PUB1092030000	DRIP PANEL	183	
PUB1092040000	UNDERGROUND PANEL	183	
PUB1094110000	LEAFLET DISPLAY BOX	181	
PUB1094850011	CLABER GUIDE	181	
PUB1095470000	CLABER PANEL	183	

Code	Description	Page	Qty
8188	CONTROL UNIT	175	6
90000	ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 2"	176	100
90001	ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 2"	176	100
90003	0°-350° ADJUSTABLE HEAD 6 L/MIN	177	1x25
90015	ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 4"	176	50
90016	ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 4"	176	50
90142	SPRINKLER BODY 2" - 5 CM	176	100
90143	SPRINKLER BODY 3" - 7,5 cm	176	50
90144	SPRINKLER BODY 4" - 10 cm	176	50
90145	0°-350° ADJUSTABLE HEAD 10 L/MIN	177	1x25
90152	MEDIUM-JET TURBINE SPRINKLER	177	25
90154	LONG-JET TURBINE SPRINKLER	177	20
90928	1" F. PROGRAMMABLE SOLENOID VALVE	175	6
90938	24 V - 1" FEMALE SOLENOID VALVE	174	12
90939	24 V - 1" MALE SOLENOID VALVE	174	12









**claber**

I Maestri dell'Acqua

CLABER SPA  
Via Pontebbana 22  
33080 Fiume Veneto (PN) - Italy

Tel. +39 0434 958836  
Fax +39 0434 957193  
info@claber.com  
www.claber.com

